

CLUTCHES & BRAKES

CONTENTS



COUPLINGS

ETP BUSHINGS

**ELECTROMAGNETIC
CLUTCHES & BRAKES**SPEED CHANGERS
& REDUCERS

INVERTERS












LINEAR SHAFT DRIVES








TORQUE LIMITERS





ROSTA

- » **248 ELECTROMAGNETIC CLUTCHES & BRAKES**
 - 250 Electromagnetic Clutch & Brake Models
 - 252 Selection Guide
 - 253 Select by Product Characteristics
 - 254 Applications
- » **256 ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES**
 - 258 Product Lineup
 - 262 102
 - 266 CYT
 - 268 112
- » **270 ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES**
 - 272 Product Lineup
 - 276 101
 - 278 CS
 - 280 111
 - 282 CSZ
 - 283 BSZ
- » **284 ELECTROMAGNETIC CLUTCH AND BRAKE UNITS**
 - 286 Product Lineup
 - 292 125
 - 296 121-□ -20G
 - 298 126
 - 302 CBW
 - 306 CMW
 - 308 121-□ -10G
 - 310 122
- » **312 ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES TECHNICAL DOCUMENT**
- » **334 SPRING-ACTUATED BRAKES**
 - 336 Product Lineup
 - 340 BXW-L/H/S
 - 342 BXW-R
 - 344 BXR-LE
 - 346 BXR
 - 350 BXL
 - 354 BXH
 - 358 BXL-N
 - 360 Selection Procedures
- » **368 ELECTROMAGNETIC TOOTH CLUTCHES**
 - 370 546
- » **374 BRAKE MOTORS**
 - 376 BMS
 - 378 BMM
- » **382 POWER SUPPLIES**
 - 384 Product Lineup
 - 386 BES
 - 388 BEH
 - 390 BEW
 - 392 BEW-S
 - 394 BEW-W
 - 396 BEW-FH
 - 398 BEM
 - 400 BEM-T
- » **613 MIKI PULLEY Hole-Drilling Standards**

Electromagnetic Clutch & Brake Models

Series	ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES			
Device	Micro Clutches		Micro Brakes	
Models	102	CYT	112	
Type	13	33	33M	13
	 >> P.262	 >> P.264	 >> P.266	 >> P.268
	15	35		12
	 >> P.263	 >> P.265	33B	 >> P.269
	11	31		11
	 >> P.263	 >> P.265	 >> P.267	 >> P.269

Series	SPRING-ACTUATED BRAKES			
Models	BXW-L/H/S	BXR-LE	BXL	BXL-N
	 >> P.340	 >> P.344	 >> P.350	 >> P.358
Models	BXW-R	BXR	BXH	
	 >> P.342	 >> P.346	 >> P.354	

Series	ELECTROMAGNETIC CLUTCH & BRAKE POWER SUPPLIES		RECTIFIED POWER SUPPLIES FOR SPRING-ACTUATED BRAKES DC45/90/180V	
Models	BES	BEH	BEW	BEW-S
	 >> P.386	 >> P.388	 >> P.390	 >> P.392

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
 ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
 ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE












ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS




POWER SUPPLIES

ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES



Clutches			Brakes	
101	CS	CSZ	111	BSZ
13G	33G	35	13G	12

 >> P.276	 >> P.278		 >> P.280	
15G	35G		12G	
 >> P.277	 >> P.279	 >> P.282	 >> P.281	 >> P.283
11G	31G		11G	
 >> P.277	 >> P.279		 >> P.281	

Series ELECTROMAGNETIC CLUTCH AND BRAKE UNITS

Series	Clutches & Brakes	Double clutches & brakes
Device	 >> P.292	 >> P.310
	 >> P.308	

Series ELECTROMAGNETIC TOOTH CLUTCHES BRAKE MOTORS

Series	ELECTROMAGNETIC TOOTH CLUTCHES	BRAKE MOTORS
Models	546	BMS-BMM
	 >> P.370	 >> P.376

BEW-W

BEW-FH

BEM

BEM-T



>> P.394



>> P.396



>> P.398



>> P.400


>> A selection guide for electromagnetic clutches and brakes begins on the next page.

Selection Guide

Miki Pulley divides its electromagnetic clutches & brakes into several major categories: electromagnetic-actuated clutches & brakes, spring-actuated clutches & brakes, electromagnetic tooth clutches, brake motors, and power supplies.

When selecting a product, have information handy on your application, required torque, performance, load properties, drive source and the like, and then use the diagram on the page at right as your guide. Selection details are described in the selection procedures given for each series.

List of Products

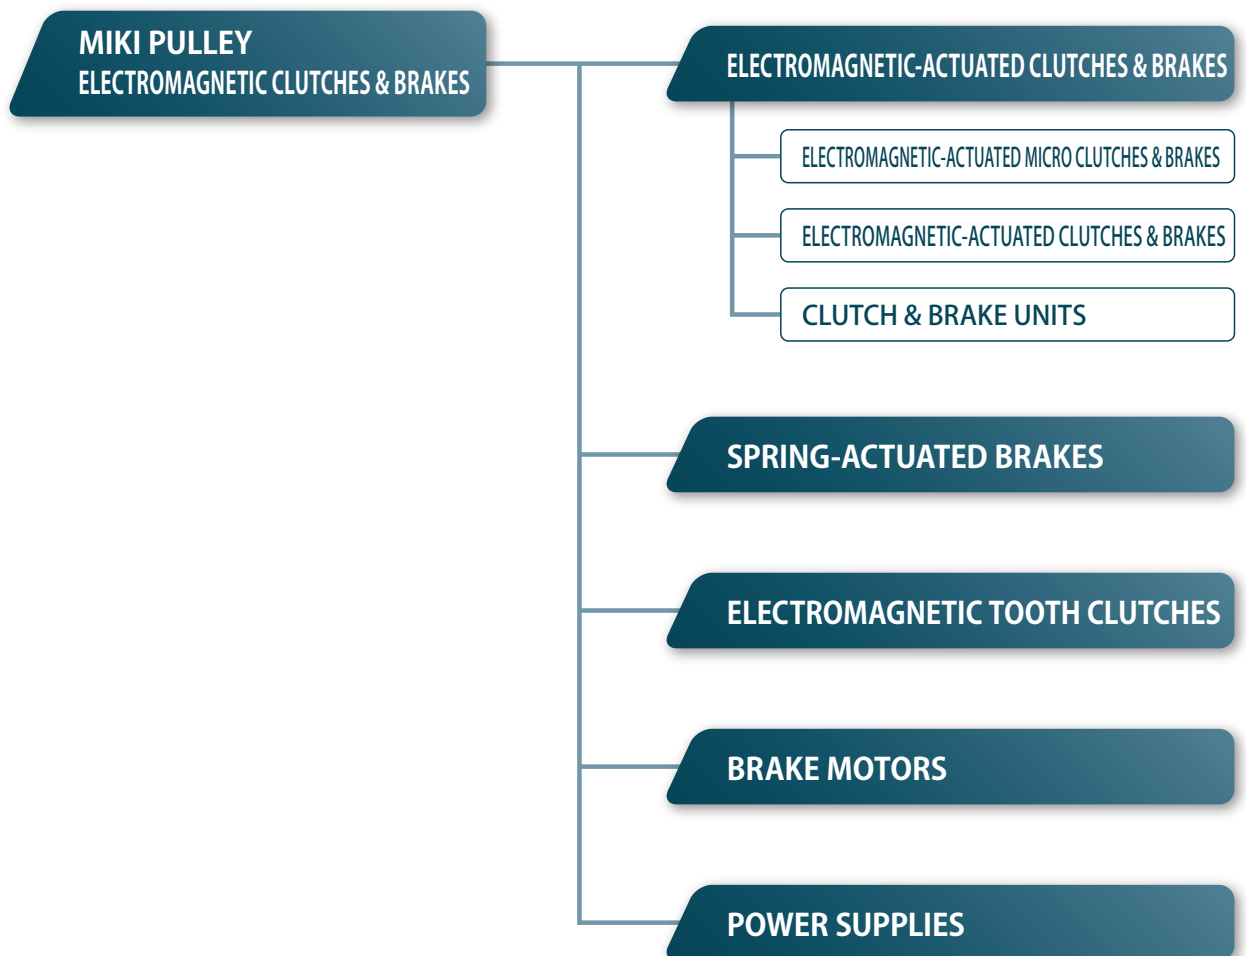

Select by Product Characteristics

		Torque (N·m)	
ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES	Electromagnetic-actuated/micro	Clutches	102 [0.4-2.4 N·m] CYT [0.4-1.0 N·m]
		Brakes	112 [0.4-2.4 N·m]
	Electromagnetic-actuated	Clutches	CSZ [2.4-10 N·m] 101/CS [5-320 N·m]
		Brakes	BSZ [2.4-10 N·m] 111 [5-320 N·m]
	Clutch & Brake Units	Drip-proof type	125 [2.4-160 N·m]
		Open-disc brake system type	121-□-206 [5-320 N·m]
		Motor-coupled type	126 [5-80 N·m]
		Speed reducer-integrated type	CBW [5-40 N·m]
		Motor/speed reducer-integrated type	CMW [5-40 N·m]
		Double-clutch units	121-□-106 [5-320 N·m]
		Double clutch and brake units	122 [5-160 N·m]
	SPRING-ACTUATED BRAKES	Holding use	BXW-R [0.30-2.50 N·m] BXW-S [0.36-5.20 N·m] BXR-LE [0.06-3.20 N·m] BXR [5-55 N·m]
		Holding and braking use	BXW-H [0.24-4.00 N·m] BXH [4-44 N·m]
		Braking use	BXW-L [0.12-2.00 N·m] BXL [2-22 N·m] BXL-N [2-80 N·m]
TOOTH CLUTCHES	546 [17.5-2200 N·m]		
BRAKE MOTORS	Electromagnetic-actuated	BMM [2.5-50 N·m] Motor output 0.2 kW to 3.7 kW	
	Spring-actuated	BMS [2-15 N·m] Motor output 0.2 kW to 1.5 kW	

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES

ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES

ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES


BRAKE MOTORS

POWER SUPPLIES


Applications

Product model BXR

Employed device Articulated Robot

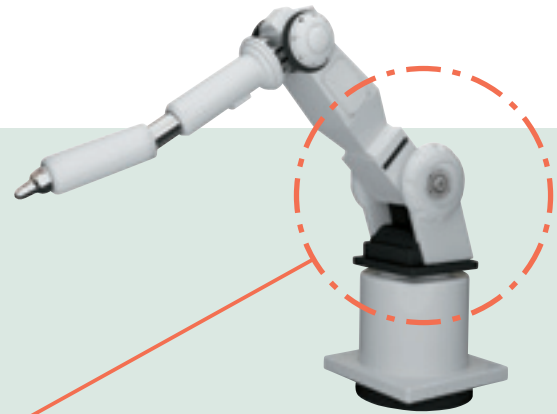

BXR spline type for holding arms. Saves space with slim design and greatly reduces drag wear by using light rotor.

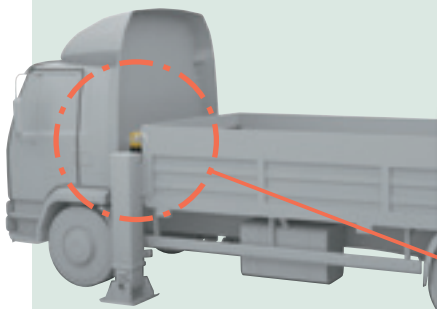

Product model 111

Employed device Special-purpose Vehicles





The Electromagnetic-actuated brake 111 model is used in the elevating device for the auxiliary leg.

Product model BXR

Employed device Aerial Vehicle

BXR model as the holding brake for drive motor. Slim design helps save space.

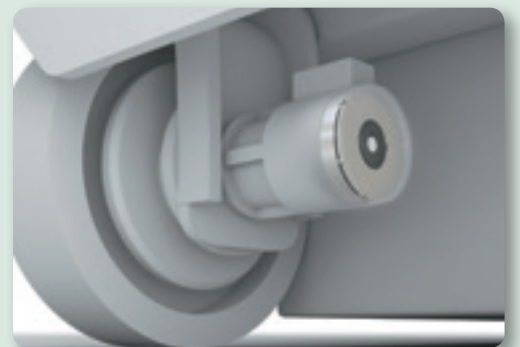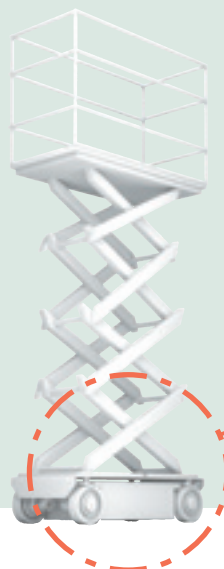

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES


ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES	ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
	ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
	ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS


POWER SUPPLIES

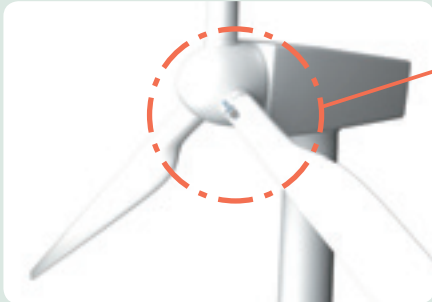

Product model BXW Large Size (Custom Product)

Employed device Wind Turbine Generator


Large BXW as the pitch drive device of a wind turbine generator.

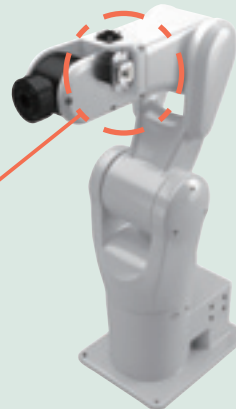

Product model BXR-LE

Employed device Vertically Articulated Robots

The BXR-LE models owes its ultra-thin profile to a dedicated controller. Mounted on the output shaft, it is ideal for applications where space is limited. Its dedicated controller also saves energy.

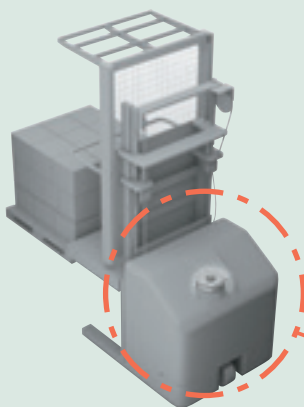

Product model BXH

Employed device Forklifts

Spring-actuated brake BXH model for electric forklift. Compact, high torque design.



SPRING-ACTUATED BRAKES

Application

Motors, articulated robots, actuators, machine tools, forklifts, aerial vehicles, hoists, electric carts, electric shutters, medical equipment, wind turbine generators

Provides Excellent Performance in Emergency Braking When Power Goes Out and in Long-term Holding

These are electromagnetic brakes actuated by the force of springs when not energized. These standard brakes boast a variety of advantages, including quiet operation, long service life, slim form factors, high torque in a compact package, stable braking force, and the ability to release manually. We can create custom designs for you based on these standard products.



COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES

ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES

ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW


BXR

BXL

BXH

BXL-N

Available Models

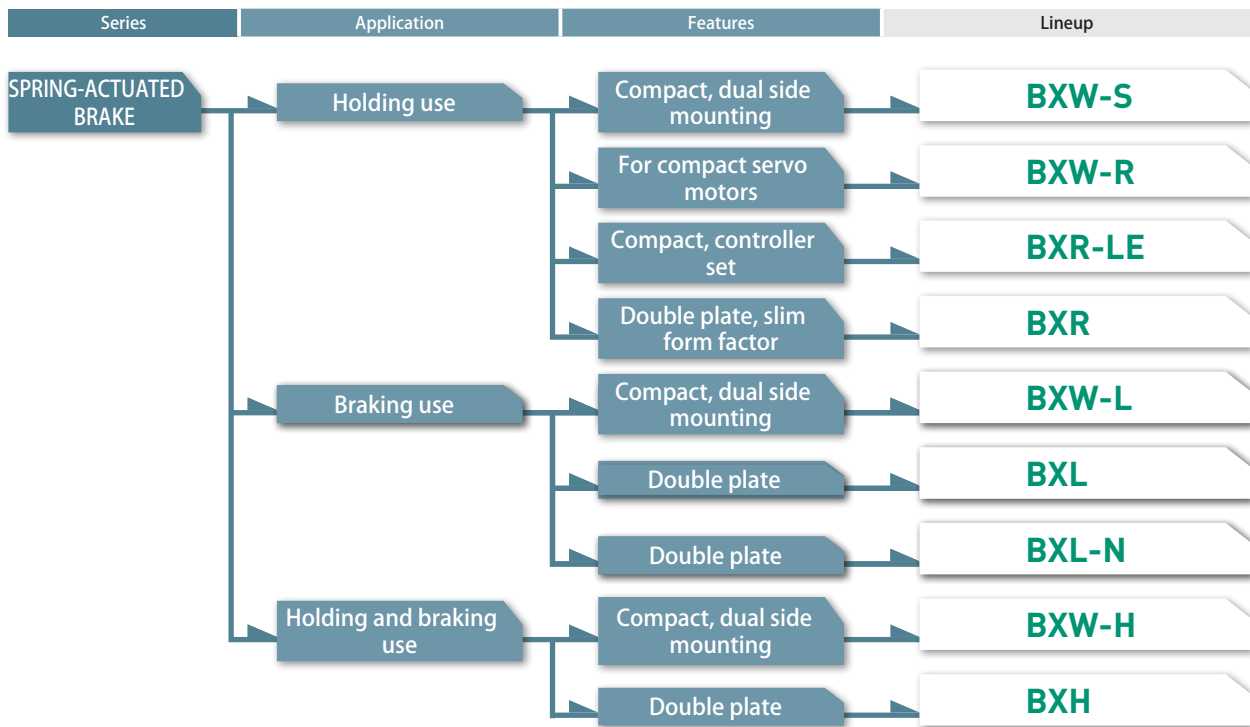

For details on selection, see P. 360 to 365.

Model Selection

Models/ Type	Mounting method	Torque [N·m]	Release lever	Dust cover	Slim	Quiet mechanism		
						Reduced aperiodic noise	Reduced armature pull-in noise	Reduced braking noise
BXW-L/H/S	Stator/flange	0.01 ~ 0.1	Option	Option	Customization	Std.	Customization	Customization
		0.12 ~ 5.20						
BXW-R	Stator	0.30 ~ 2.50	—	—	Customization	Customization	Customization	Customization
BXR-LE	Stator	0.06 ~ 3.20	—	—	Std.	Customization	Customization	Customization
BXR	Stator	5 ~ 55	—	—	Std.	Customization	Customization	Customization
BXL	Stator	2 ~ 22	Option	—	Customization	Option	Option	Std.
BXH	Stator	4 ~ 44	Option	—	Customization	Option	Customization	Customization
BXL-N	Stator	2 ~ 80	—	—	Customization	Option	Option	Std.

Product Lineup

BXW-L/H/S




Three types for various applications

The line-up includes three types: the S type for holding, the L type for braking, and the H type for both holding and braking.

2-way mounting


The stator (a heat source) can be mounted facing either inwards or outwards.

Brake type	BXW-□-□L	BXW-□-□H	BXW-□-□S
Brake torque [N·m]	0.12 ~ 2.00	0.24 ~ 4.00	0.36 ~ 5.20
Operating temperature [°C]	-10 ~ +40	-10 ~ +40	-10 ~ +40
Backlash	Extremely small size	Extremely small size	Extremely small size



Structure

Has release lever

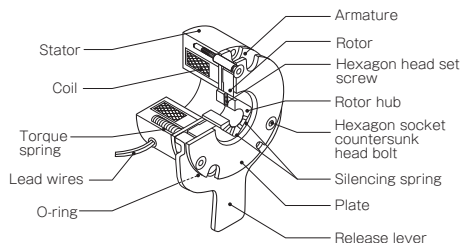

BXW-R



Dedicated design for small servo motors

These have dedicated designs matched for specifications and dimensions for □40, □60, and □80 small servo motors.


Low-inertia rotor

We succeeded in dramatically reducing both mass and drag wear while ensuring adequate strength.

Brake torque [N·m]	0.30 ~ 2.50
Operating temperature [°C]	-10 ~ +40
Backlash	Extremely small size



Structure

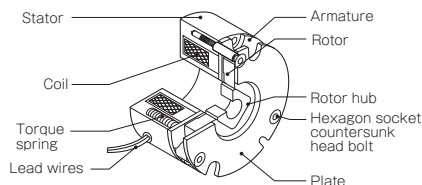


BXR-LE




Ultra compact

Use with a built-in dedicated controller provides a range of benefits, including an ultra-thin profile, reduced energy consumption, lower heat emissions, higher torque and a longer service life.

Brake torque [N·m]	0.06 ~ 3.20
Operating temperature [°C]	-10 ~ +40
Backlash	Extremely small size



Structure

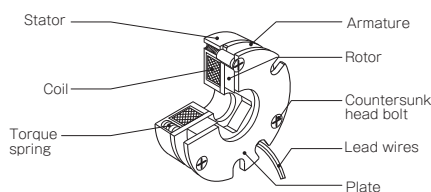

BXR



Ultra-slim

This ultra-slim design is two-thirds the thickness of our previous design.

Low-inertia rotor

We succeeded in dramatically reducing both mass and drag wear while ensuring adequate strength.


Extremely small backlash

The backlash of the spline hub type is 0.2° to 0.5°.

Brake torque [N·m]	5~55
Operating temperature [°C]	-10 ~ +40
Backlash	Extremely small size



Structure

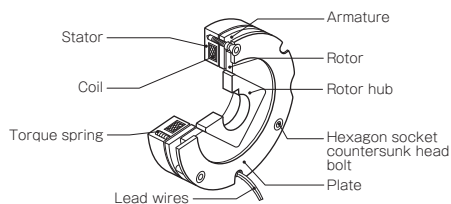

BXL



Low noise

These reduce annoying high-frequency friction noise during braking. Products that reduce aperiodic noise or armature pull-in noise are also available.


Stable braking

With low torque fluctuation, these brake loads instantly even when malfunctions occur.

Brake torque	[N·m]	2 ~ 22
Operating temperature	[°C]	-10 ~ +40
Backlash		Extremely small size



Structure

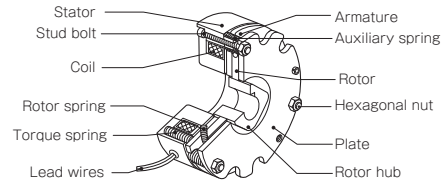

BXH



For both holding and braking

These brakes ensure sufficient torque for holding applications while also being usable as emergency brakes.


High torque

Provide twice the torque with the same dimensions as BXL models.

Brake torque	[N·m]	4~44
Operating temperature	[°C]	-10 ~ +40
Backlash		Extremely small size



Structure

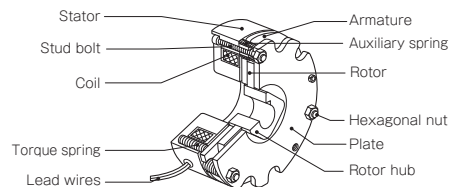

BXL-N



Low noise

These reduce annoying high-frequency friction noise during braking. Products that reduce aperiodic noise or armature pull-in noise are also available.


Variety of torques

Two to three different kinds of braking torque for the same outer diameter are available to permit the most suitable design for the application at hand.

Brake torque	[N·m]	2 ~ 80
Operating temperature	[°C]	0 ~ +40
Backlash		Extremely small size




Structure

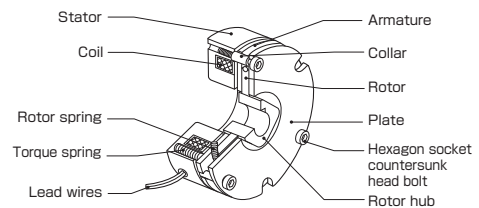

Customization Examples

BXW Large Type

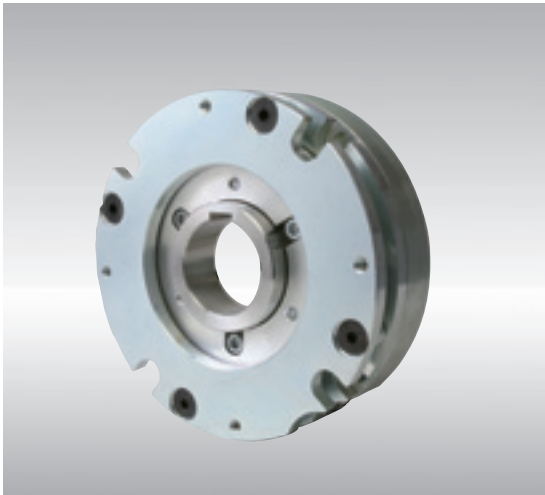

This is a large version of the BXW with static friction torque of 300 N·m. Backlash is kept extremely small by locking the rotor hub to the rotor via a disc spring.

Integrated coupling-rotor hub type




Even more compact devices can be designed by fitting the slim and compact BXR model spline rotor hub into a metal plate-spring-type coupling exterior.

Types with Integrated Flanges



Mounting flanges and brake stators can be integrated. This helps reduce the number of components and saves space.

Special Release Levers

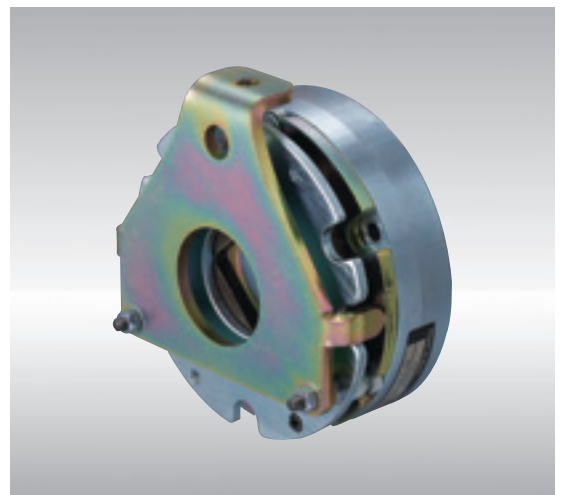

Release levers can also be designed for specific units to match the device construction.

Contact Miki Pulley from our website for details.

FAQ

Q1 I don't see anything with the torque and response I need in your standard products. Can you customize something for me?

A We can customize units in many ways: outfitting them for overexcitation power supplies or use of inrush current at motor startup, changing the frictional material, boosting torque, increasing response, extending the total energy (service life), suppressing heat generation, and more. Consult Miki Pulley for details.



Overexcitation power supply
BEW-2FH


Q2 Can you handle cases in which standard products cannot be installed due to dimensional constraints?

A Yes, we can. For example, we have a long track record creating slimmer units that deliver the same torque. These units can provide the same torque while being only about half as thick as the standard product, although this will vary with your conditions. Consult Miki Pulley for details.

Q3 What do you have for dealing with noise issues?

A Spring-actuated brakes have a number of types of noises, such as (1) rattling generated by microvibrations during rotating, (2) armature pull-in and release noise, (3) friction noise (chirping) during braking, and (4) grinding noise under drive (when the brake is released). We have ways of reducing all of these. The figure below shows an example.

To reduce pull-in/release noise: Special plate specification

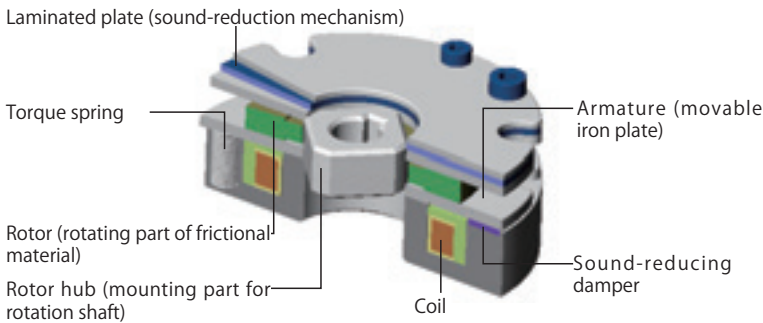

To reduce grinding noise: Single-side braking specification



COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKES

SPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED CLUTCHES AND BRAKES	ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
	ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
	ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED
BRAKE

ELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N

BXW Models

Specifications

I BXW-□-□L (Braking use)

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate P_{ba} [W]	Total braking energy E_t [J]	Armature pull-in time t_a [s]	Armature release time t_{ar} [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXW-01-10L	01	0.12	12	5.0	0.417	28.8	F	UL3398	AWG26	5000	0.6×10^{-6}	2.5	1.5×10^6	0.008	0.015	0.2
			24	5.0	0.208	115	F									
			45	5.0	0.111	405	F									
			90	5.0	0.056	1622	F									
			180	5.0	0.028	6486	F									
BXW-02-10L BXW-02-12L	02	0.25	12	6.6	0.550	21.8	F	UL3398	AWG26	5000	1.9×10^{-6}	5.0	3.0×10^6	0.008	0.015	0.3
			24	6.6	0.275	87.3	F									
			45	6.6	0.147	307	F									
			90	6.6	0.073	1228	F									
			180	6.6	0.037	4912	F									
BXW-03-10L BXW-03-12L	03	0.50	12	9.0	0.750	16.0	F	UL3398	AWG26	5000	3.8×10^{-6}	10.0	4.5×10^6	0.025	0.025	0.4
			24	9.0	0.375	64.0	F									
			45	8.2	0.182	247	F									
			90	8.2	0.091	988	F									
			180	8.2	0.046	3954	F									
BXW-04-10L BXW-04-12L	04	1.00	12	11.5	0.958	12.5	F	UL3398	AWG22	5000	12.0×10^{-6}	20.0	7.0×10^6	0.030	0.030	0.6
			24	11.5	0.479	50.1	F									
			45	10.0	0.222	203	F									
			90	10.0	0.111	810	F									
			180	10.0	0.056	3241	F									
BXW-05-10L BXW-05-12L	05	2.00	12	13.0	1.083	11.1	F	UL3398	AWG22	5000	23.0×10^{-6}	30.0	12.0×10^6	0.035	0.035	0.8
			24	13.0	0.542	44.3	F									
			45	13.0	0.289	156	F									
			90	13.0	0.144	623	F									
			180	13.0	0.072	2492	F									

I BXW-□-□H (Holding and braking use)


Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate P_{ba} [W]	Total braking energy E_t [J]	Armature pull-in time t_a [s]	Armature release time t_{ar} [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXW-01-10H	01	0.24	12	5.0	0.417	28.8	F	UL3398	AWG26	5000	0.6×10^{-6}	0.5	0.2×10^6	0.010	0.010	0.2
			24	5.0	0.208	115	F									
			45	5.0	0.111	405	F									
			90	5.0	0.056	1622	F									
			180	5.0	0.028	6486	F									
BXW-02-10H BXW-02-12H	02	0.50	12	6.6	0.550	21.8	F	UL3398	AWG26	5000	1.9×10^{-6}	1.0	0.3×10^6	0.010	0.010	0.3
			24	6.6	0.275	87.3	F									
			45	6.6	0.147	307	F									
			90	6.6	0.073	1228	F									
			180	6.6	0.037	4912	F									
BXW-03-10H BXW-03-12H	03	1.00	12	9.0	0.750	16.0	F	UL3398	AWG26	5000	3.8×10^{-6}	2.0	0.5×10^6	0.035	0.020	0.4
			24	9.0	0.375	64.0	F									
			45	8.2	0.182	247	F									
			90	8.2	0.091	988	F									
			180	8.2	0.046	3954	F									
BXW-04-10H BXW-04-12H	04	2.00	12	11.5	0.958	12.5	F	UL3398	AWG22	5000	12.0×10^{-6}	4.0	1.0×10^6	0.040	0.025	0.6
			24	11.5	0.479	50.1	F									
			45	10.0	0.222	203	F									
			90	10.0	0.111	810	F									
			180	10.0	0.056	3241	F									
BXW-05-10H BXW-05-12H	05	4.00	12	13.0	1.083	11.1	F	UL3398	AWG22	5000	23.0×10^{-6}	6.0	2.0×10^6	0.045	0.030	0.8
			24	13.0	0.542	44.3	F									
			45	13.0	0.289	156	F									
			90	13.0	0.144	623	F									
			180	13.0	0.072	2492	F									

I BXW-□-□S (Holding use)

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate P_{ba} [W]	Total braking energy E_t [J]	Armature pull-in time t_a [s]	Armature release time t_{ar} [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXW-01-10S	01	0.36	24	5.0	0.208	115	F	UL3398	AWG26	5000	0.6×10^{-6}	—	—	0.025	0.010	0.2
BXW-02-10S BXW-02-12S	02	0.75	24	6.6	0.275	87.3	F	UL3398	AWG26	5000	1.9×10^{-6}	—	—	0.030	0.010	0.3
BXW-03-10S BXW-03-12S	03	1.50	24	9.0	0.375	64.0	F	UL3398	AWG26	5000	3.8×10^{-6}	—	—	0.035	0.020	0.4
BXW-04-10S BXW-04-12S	04	2.60	24	11.5	0.479	50.1	F	UL3398	AWG22	5000	12.0×10^{-6}	—	—	0.040	0.025	0.6
BXW-05-10S BXW-05-12S	05	5.20	24	13.0	0.542	44.3	F	UL3398	AWG22	5000	23.0×10^{-6}	—	—	0.045	0.030	0.8

* The armature pull-in time and armature release time are taken during DC switching.

Dimensions

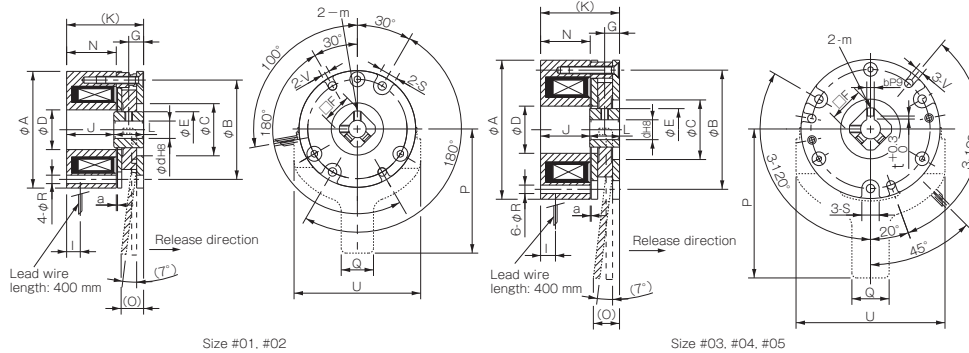


Unit [mm]

Size	Radial direction dimensions										Axial direction dimensions										Bore dimensions			
	A	B	C	D	E	S	V	R	F	m	O	P	Q	U	G	I	J	K	L	N	a	d	b	t
01	37	32	18	13.5	12.0	6	3	3	10	M3	-	-	-	-	4.5	5.0	22.5	31.5	9	22.5	0.10	5	-	-
02	47	40	21	16.0	14.5	7	3.4	3.4	12	M3	9	50	13	51	6.0	5.5	19.2	31.2	12	20.0	0.10	6	-	-
03	56	48	24	19.0	17.0	7	3.4	3.4	14	M3	11	60	15	60	6.0	6.0	19.9	31.9	12	20.0	0.15	8	-	-
04	65	58	35	24.0	22.0	7	3.4	3.4	18	M4	12	70	15	70	7.0	7.0	19.9	33.9	14	21.0	0.15	10	3	1.2
05	75	66	36	28.0	26.5	9	4.5	4.5	22	M4	14	80	20	80	7.0	7.0	22.1	36.1	14	21.5	0.15	12	4	1.5

* There is no release lever option for size #01.

How to Place an Order

BXW-01-10L-24V-5



* Models equipped with the release lever and models with 12-V and 180-V voltage specifications are made to order.
* Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tables and voltages not listed in the Specifications table.

Options Dust Cover

Dust covers are available as options. These enable use in challenging environments by keeping out foreign matter. Dust covers come in two types: full covers that have no hole for the shaft, and shaft-hole covers, which can be used on brakes mounted with the shaft passing through. You can also choose the locations of the lead exit holes for brakes mounted on plates or mounted on stators.




Specifications

Material	Ethylene propylene diene monomer (EPDM) rubber
Temperature range	-40°C to 140°C
Exterior color	Black
Applicable brake models	L type, H type, S type BXW models
Applicable brake sizes	#01, #02, #03, #04, #05
Applicable specification voltages	12 V DC, 24 V DC, 45 V DC, 90 V DC, 180 V DC


* This temperature range is for dust cover materials. The operating temperature for BXW models is -10°C to 40°C.
* Cannot be mounted on BXW models with release levers or R-type BXW models.

How to Place an Order

BXW-01-C02



Dimensions



Shape No.	a	b	c
01	×	×	×
02	×	×	○
03	×	○	×
04	○	×	×
05	○	×	○
06	○	○	×

Unit [mm]

Model	φ A	B	φ d
BXW-01-C □	41	33	16
BXW-02-C □	51	33	21
BXW-03-C □	60	33.5	24
BXW-04-C □	69	35.5	30
BXW-05-C □	79	37.5	30

* Symbol a indicates a hole made for brakes with shafts passing through; symbol b indicates a hole made for lead exit when mounted on a plate; symbol c indicates a hole made for lead exit when mounted on a stator.
* Shapes #01 and #04 require that a hole be made separately for leads to exit.

BXW Models


Specifications (BXW-□ - □ R)

(For servo motors)

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate $E_{ba\ell}$ [J]	Total braking energy E_T [J]	Armature pull-in time t_a [s]	Armature release time t_r [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXW-01-10R	01	0.3	24	6.1	0.254	94.4	F	UL3398	AWG26	6000	1.36×10^{-7}	15	3000	0.035	0.020	0.1
BXW-03-10R	03	1.3	24	7.2	0.300	80.0	F	UL3398	AWG22	6000	1.17×10^{-6}	87	17000	0.050	0.020	0.3
BXW-05-10R	05	2.5	24	8.0	0.333	72.0	F	UL3398	AWG22	6000	3.68×10^{-6}	200	40000	0.060	0.020	0.5

* The armature pull-in time and armature release time are taken during DC switching.

Dimensions

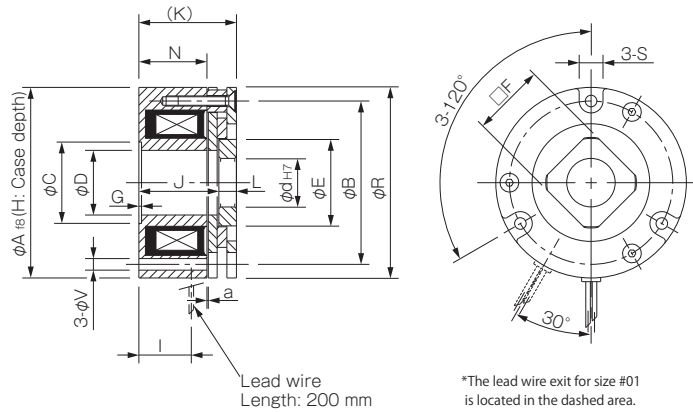


Unit [mm]

Size	Radial direction dimensions									Axial direction dimensions								Bore dimensions	
	A	B	C	D	E	S	V	R	F	G	H	I	J	K	L	N	a	d	d max
01	33	26.5	16	9	14	7	3.4	32.5	12	0.2	4	19	26	30	4	22.8	0.1	8.5	8.5
03	48	42	26	14	23	8	3.4	47.5	19	0.2	4	18	26	30	4	22.6	0.1	11	15
05	64	56	28	22	31	8	4.5	63.5	25	0.2	4	16	25.5	30	4.5	21.3	0.1	16	20

* Bore diameters other than the standard bore diameters given above are also possible. d max indicates the maximum bore diameter with a round shaft.
 * In addition to round bores, key processing can also be handled. Consult Miki Pulley for details.
 * Dimensions, mounting and the like are not interchangeable with other BXW models.

How to Place an Order

BXW-01-10R-24V-8.5



*Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tables and voltages not listed in the Specifications table.

Items Checked for Design Purposes

Precautions for Handling

Brakes

Most electromagnetic braking systems are made using flexible materials. Be careful when handling such parts and materials as striking or dropping them or applying excessive force could cause them to become damaged or deformed.

Lead Wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles, or allow them to hang too low.

Frictional Surface

Since these are dry brakes, they must be used with the frictional surface dry. Keep water and oil off of the frictional surfaces when handling the brakes.

Precautions for Use

Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. In addition to friction surfaces, lead wires are not oil resistant. Lead wire covers may deteriorate noticeably in environments exposed to oil, cutting oil, etc.

Operating Temperature

The operating temperature range is -10° C to 40° C. If you will use the product at other temperatures, consult Miki Pulley.

Power Supplies

BXW models use commercial AC 100 V or 200 V single phase, full-wave rectified or half-wave rectified. Select as appropriate for your application. See the table below, "Recommended power supplies and circuit protectors," for the power supply devices we recommend.

Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme changes in power supply voltage. Make sure to keep power supply voltage to within ± 10% of the rated voltage value.

Air Gap Adjustment

BXW models do not require air gap adjustment. The brake air gap is adjusted when the braking system is shipped from the factory.

Circuit Protectors

If using a power supply that is not equipped with a circuit protector for DC switching, make sure to connect the recommended circuit protector device in parallel with the brake.

Recommended Power Supplies and Circuit Protectors

Recommended power supplies

Input AC power	Brake voltage	Rectification method	Recommended power supply model
AC100V 50/60Hz	DC24V	Single-phase, full-wave	BES-20-71-1
AC100V 50/60Hz	DC45V	Single-phase, half-wave	BEW-1R
AC100V 50/60Hz	DC90V	Single-phase, full-wave	BEW-1R
AC200V 50/60Hz	DC24V	Single-phase, full-wave	BES-20-71
AC200V 50/60Hz	DC90V	Single-phase, half-wave	BEW-2R
AC200V 50/60Hz	DC180V	Single-phase, full-wave	BEW-2R
AC400V 50/60Hz	DC180V	Single-phase, half-wave	BEW-4R

* A DC power supply such as a battery can also be used to supply the 24 V DC required for the brake voltage.

Recommended circuit protectors

Input voltage	Brake voltage	Rectification method	Recommended circuit protector (varistor)
DC24V	DC24V	-	NVD07SCD082 or an equivalent
AC100V 50/60Hz	DC45V	Single-phase, half-wave	NVD07SCD220 or an equivalent
AC100V 50/60Hz	DC90V	Single-phase, full-wave	NVD07SCD220 or an equivalent
AC200V 50/60Hz	DC90V	Single-phase, half-wave	NVD07SCD470 or an equivalent
AC200V 50/60Hz	DC180V	Single-phase, full-wave	NVD07SCD470 or an equivalent
AC400V 50/60Hz	DC180V	Single-phase, half-wave	NVD14SCD820 or an equivalent

* NVD □ SCD □ parts are manufactured by KOA Corporation.
* DC24V indicates a product recommended with a stepdown transformer or the like.
* BXW models do not come with circuit protectors.

Precautions for Mounting

Mounting Orientation

BXW models can be mounted with the stator facing inwards (stator mounted) or outwards (plate mounted). Select your mounting orientation as the application dictates. Be aware, however, that the BXW-R type is only compatible with stator centering-mark mounting. Your understanding is appreciated.

Affixing the Rotor Hub

Affix the rotor hub to the shaft with hex-socket-head set screws such that the rotor hub does not touch the armature or stator. If you are applying adhesive to the hex-socket-head set screws, be careful that the adhesive does not come out onto the rotor hub surface. Note also that since the BXW-R type is constructed so that the rotor hub does not go through the stator, affix it by press-fitting it onto the shaft at a position that does not touch the armature (see dimension J) when they are assembled.

Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread-locking compound to bolts and screws used to install brakes.

Shafts

The shaft tolerance should be h7 class (JIS B 0401). Note that the harder the material used in the shaft, the less effective the hexagon-socket set screw will be. Note also that for the BXW-R type, the shaft is press fitted into the rotor hub. The shaft tolerance should be determined based on the press-fit tolerance.

Accuracy of Brake Attachment Surfaces

Make sure that concentricity (X) and perpendicularity (Y) do not exceed the allowable values of the table below.

Allowable concentricity and perpendicularity values for the BXW

Size	Concentricity (X)	Perpendicularity (Y)
	T.I.R. [mm]	T.I.R. [mm]
01	0.05	0.02
02	0.05	0.02
03	0.10	0.02
04	0.10	0.02
05	0.10	0.02

Stator mounted


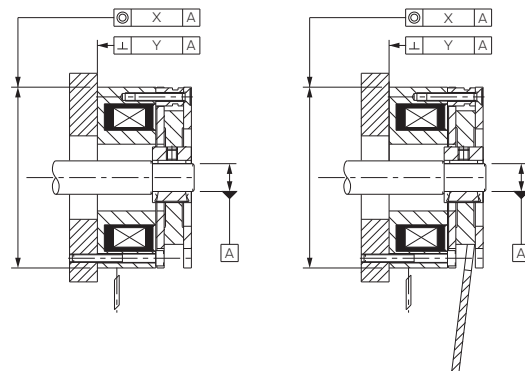


Plate mounted


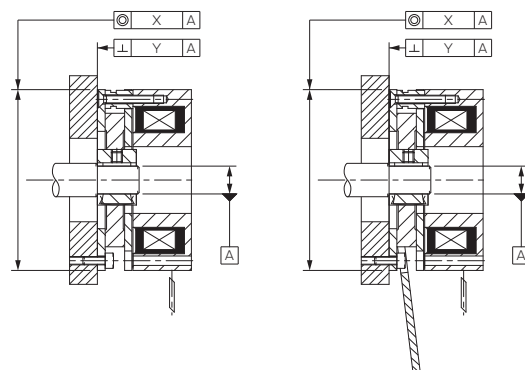


BXR-LE Models For holding

Specifications (Brake unit)

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)								Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate $E_{ba\ell}$ [J]	Total braking energy E_t [J]	Armature pull-in time (24 V DC) t_a [s]	Armature release time (7 V DC) t_r [s]	Mass [kg]
			Overexcitation output				Normal excitation output					UL style	Size							
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]	Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]										
BXR-015-10LE	015	0.06	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	3.34×10^{-8}	5	1000	0.020	0.020	0.03
BXR-020-10LE	020	0.14	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	5.56×10^{-8}	15	3000	0.035	0.020	0.06
BXR-025-10LE	025	0.32	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	1.56×10^{-7}	15	3000	0.035	0.020	0.08
BXR-035-10LE	035	0.62	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	4.83×10^{-7}	87	17000	0.050	0.020	0.12
BXR-040-10LE	040	1.32	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	6.32×10^{-7}	87	17000	0.060	0.020	0.16
BXR-050-10LE	050	3.20	24	16.5	0.688	35	7	1.4	0.200	35	F	UL3398	AWG26	6000	1.51×10^{-6}	200	40000	0.060	0.020	0.40

Dimensions (Brake unit)

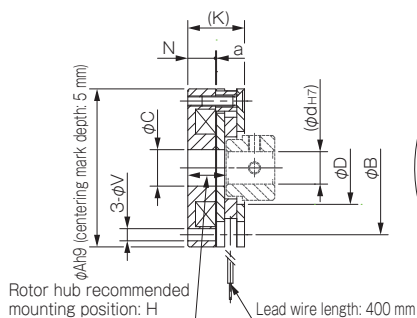


Model	Size	Radial direction dimensions [mm]										Axial direction dimensions [mm]			Rotor hub machining dimensions [mm]	
		A	B	C	D	d max.	F	S	V	H	K	N	a	L	D2	F2
BXR-015-10LE	015	26	22	7	12	6	8	4.3	2.3	9.5 ~ 10.0	14.0	7.0	0.1	4 or more	$10_{-0.1}^0$	$8_{-0.07}^0$
BXR-020-10LE	020	32	28	9	16	8	12	5.0	2.3	9.5 ~ 10.0	14.0	7.0	0.1	4 or more	$14_{-0.1}^0$	$12_{-0.07}^0$
BXR-025-10LE	025	39	33	9	18	8	12	5.5	3.0	9.5 ~ 10.0	14.0	7.0	0.1	4 or more	$14_{-0.1}^0$	$12_{-0.07}^0$
BXR-035-10LE	035	48	42	15	28	14	19	5.5	3.0	9.5 ~ 10.0	14.0	7.0	0.1	4 or more	$23_{-0.1}^0$	$19_{-0.07}^0$
BXR-040-10LE	040	56	50	15	27	14	19	6.5	3.4	9.9 ~ 10.4	14.5	7.4	0.1	4 or more	$23_{-0.1}^0$	$19_{-0.07}^0$
BXR-050-10LE	050	71	65	22	37	20	25	8.0	4.4	14.0 ~ 14.4	19.0	10.5	0.1	4.5 or more	$31_{-0.1}^0$	$25_{-0.07}^0$


Specifications (Controller)

Model	BEM-24ESN7-120N			
Input voltage	24V DC $\pm 10\%$ smoothing power supply			
Output voltage	Initial: 24 V DC (0.2 sec.) Constant: 7 V DC ($\pm 10\%$), PWM control * When the input voltage is 21 V DC, the output voltage is cut off.			
Max. output current	1.0 A DC (ambient temp.: 20°C), 0.8 A DC (ambient temp.: 60°C)			
Time rating	Continuous			
Insulating resistance	500 V DC, 100 M Ω with Megger (input/output - between terminal and case)			
Dielectric strength voltage	1000 V AC, 50/60 Hz, 1 min. (input/output - between terminal and case)			
Ambient environment	-20 to 60°C, 5 to 95% RH, no condensation/freezing			
Mass	0.02kg			
Lead wire	Function	Description	UL style	Size
Red	Input (+)	Connects the 24 V DC smoothing power supply (+)	UL3398	AWG26
Black	Input (-)	Connects the 24 V DC smoothing power supply (-)	UL3398	AWG26
Blue	Output	Connects the spring-actuated brake (either pole)	UL3398	AWG26
Blue	Output	Connects the spring-actuated brake (either pole)	UL3398	AWG26


Dimensions (Controller)

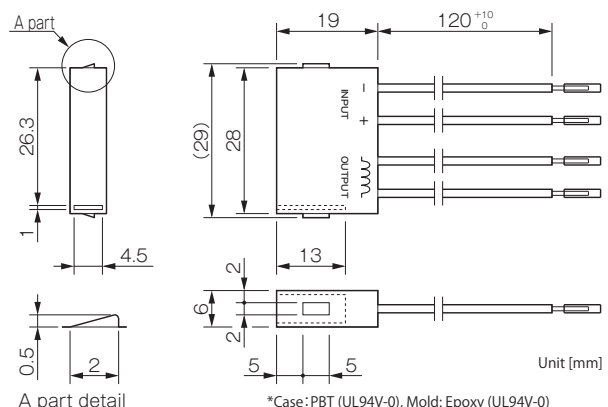

Structure (Controller)

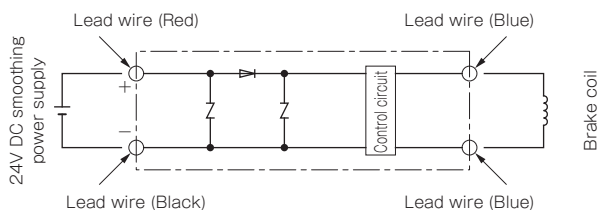


Timing Chart (Controller)

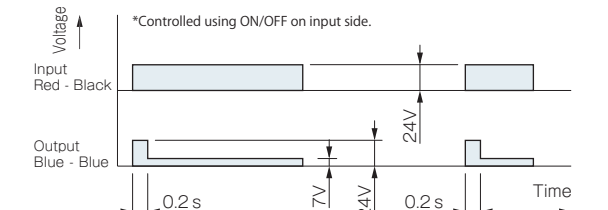


Options Rotor Hub

■ Set screw type (C)



Model	Size	L [mm]	D2 [mm]	\square F2 [mm]	m Nominal dia.	d[mm]		
						Standard	Min.	Max.
BXR-015-10LE	015	10	10	$8_{-0.07}^0$	M2.5	5	4	5
BXR-020-10LE	020	10	14	$12_{-0.07}^0$	M3	8	5	8
BXR-025-10LE	025	10	16	$12_{-0.07}^0$	M3	8	5	8
BXR-035-10LE	035	12	26	$19_{-0.07}^0$	M4	14	8	14
BXR-040-10LE	040	12	26	$19_{-0.07}^0$	M4	14	11	14
BXR-050-10LE	050	15	35	$25_{-0.07}^0$	M5	20	15	20

■ Press fit type (P)



Model	Size	L [mm]	D2 [mm]	\square F2 [mm]	d[mm]		
					Standard	Min.	Max.
BXR-015-10LE	015	4	9.5	$8_{-0.07}^0$	5	5	6
BXR-020-10LE	020	4	14	$12_{-0.07}^0$	8	7	8
BXR-025-10LE	025	4	14	$12_{-0.07}^0$	8	7	8
BXR-035-10LE	035	4	23	$19_{-0.07}^0$	14	9	14
BXR-040-10LE	040	4	23	$19_{-0.07}^0$	14	11	14
BXR-050-10LE	050	4.5	31	$25_{-0.07}^0$	20	15	20

How to Place an Order

BXR-015-10LE-006-C5

Size ——— Bore diameter (dimension symbol: d)
 Controller set type ——— Option (Rotor Hub)
 Nominal static friction torque (3-digit number listed in the specifications tables) ——— Blank: No rotor hub
 C: Set screw type
 P: Press fit type

Items Checked for Design Purposes

I Precautions for Handling

■ Brakes

Electromagnetic brakes use many soft materials. Care should be taken during handling as accidentally striking, dropping or applying excessive force to the brake could cause denting or deformation.

■ Lead wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles or allow them to hang too low.

■ Friction Surfaces

Since these are dry brakes, they must be used with the friction surfaces dry. Keep water and oil away from the friction surfaces when handling the brakes.

I Precautions for Use

■ Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. In addition to friction surfaces, lead wires are not oil resistant. Lead wire covers may deteriorate noticeably in environments exposed to oil, cutting oil, etc.

■ Operating Temperature

The operating temperature range is -10°C to 40°C for brakes and -20°C to 60°C for dedicated controllers. If you will use the product at other temperatures, consult Miki Pulley.

■ Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme fluctuations in power supply voltage. Keep the power supply voltage to within $\pm 10\%$ of the rated voltage.

■ Air Gap Adjustment

BXR LE models do not require air gap adjustment. The brake air gap is adjusted at shipment from the factory.

■ Circuit Protectors

Circuit protectors should not be connected as they are built into the dedicated controllers.

■ Controller Operation

The control function is operated by the ON/OFF switch on the input side, so switching should be carried out by the input side of the dedicated controller.

I Precautions for Mounting

■ Affixing the Rotor Hub

In the design, the rotor hub section should be installed such that it does not touch the armature or stator. Also, with the normal installation method of using hexagon-socket set screws coated with adhesive, take care not to trap adhesive between the screws and the rotor hub surface.

■ Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread locking compound to bolts and screws used to install brakes.


■ Shafts

The shaft tolerance should be h7 class (JIS B 0401). If using an optional press-fit type rotor hub, the shaft tolerance should be determined based on the press-fit tolerance.

■ Accuracy of Brake Attachment Surfaces

Make sure that the centering mark and shaft concentricity (X) and the shaft perpendicularity (Y) relative to the brake mounting surface do not exceed the allowable values in the table below.

Model	Size	Concentricity (X)	Perpendicularity (Y)
		T.I.R. [mm]	T.I.R. [mm]
BXR-015-10LE	015	0.05	0.02
BXR-020-10LE	020	0.05	0.02
BXR-025-10LE	025	0.05	0.02
BXR-035-10LE	035	0.05	0.02
BXR-040-10LE	040	0.10	0.02
BXR-050-10LE	050	0.10	0.02

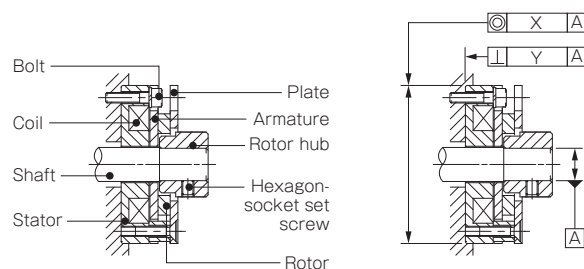


BXR Models Square Hub Type

Specifications (BXR-□-10)

Model	Size	Static friction torque Ts [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate Eba _{el} [J]	Total braking energy Et [J]	Armature pull-in time ta [s]	Armature release time tr [s]	Backlash [°]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size								
BXR-06-10-005	06	5	24	17.6	0.73	32.7	F	UL1333	AWG20	5000	2.35 × 10 ⁻⁵	500	2.0 × 10 ⁵	0.050	0.020	1.2	0.9
BXR-08-10-012	08	12	24	19.4	0.81	29.7	F	UL1333	AWG20	5000	3.45 × 10 ⁻⁵	800	2.0 × 10 ⁵	0.080	0.020	1.2	1.2
BXR-10-10-016	10	16	24	21.5	0.90	26.8	F	UL1333	AWG20	5000	1.12 × 10 ⁻⁴	1500	2.2 × 10 ⁶	0.110	0.050	0.9	1.3
BXR-12-10-030	12	30	24	23.7	0.99	24.3	F	UL1333	AWG20	5000	1.88 × 10 ⁻⁴	1500	2.5 × 10 ⁶	0.120	0.030	0.8	2.3
BXR-14-10-038	14	38	24	31.0	1.29	18.6	F	UL1333	AWG20	3600	4.22 × 10 ⁻⁴	1800	3.0 × 10 ⁶	0.120	0.030	0.5	3.0
BXR-16-10-055	16	55	24	19.0	0.79	30.3	F	UL1333	AWG20	3600	7.10 × 10 ⁻⁴	2000	3.0 × 10 ⁶	0.220	0.100	0.5	3.6

* The armature pull-in time and armature release time are taken during DC switching.
 * Backlash is the value between the rotor and rotor hub.


Dimension (BXR-□-10)

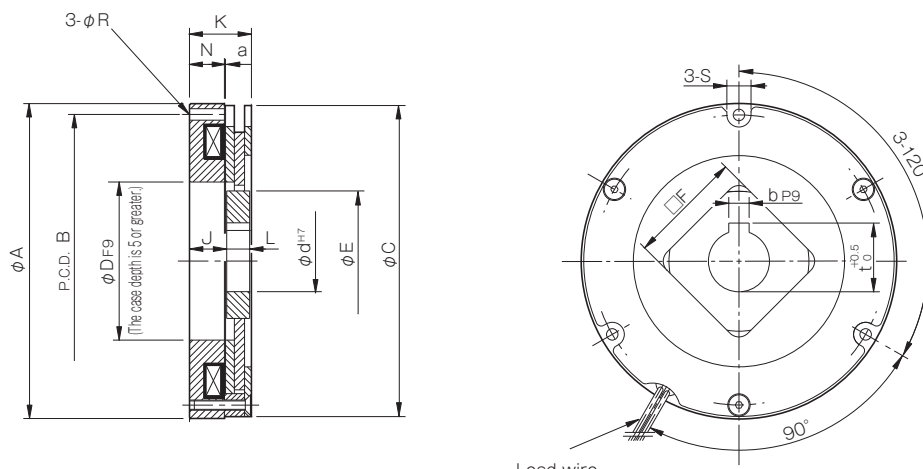

Lead wire length: 400
 *The lead wire extraction position for size 14° is 60°.

Size	Radial direction dimensions								Axial direction dimensions					Bore diameter				Unit [mm]
	A	B	C	D	E	F	R	S	J	L	N	K	a	d	b	t	d max	
06	83.5	76	82	47	42	35	4.5	9	17.0	7	14.7	25.0	0.10	20	6	22.5	25	
08	93.5	85	92	49	42	35	4.5	10	19.0	7	15.7	27.0	0.10	20	6	22.5	25	
10	123.5	115	122	62	55	45	4.5	9.5	14.6	9	13.7	24.3	0.10	24	8	27	28	
12	137.5	130	136	65	62	50	4.5	12	15.4	9	12.5	25.0	0.15	24	8	27	30	
14	167.5	158	166	80	74	60	5.5	12	16.0	9	12.0	25.0	0.15	28	8	31	38	
16	185	175	184	100	86	65	5.5	12.5	21.3	11.5	19.4	32.8	0.20	28	8	31	45	

How to Place an Order

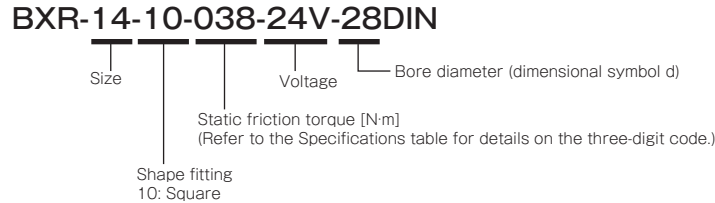

* Contact Miki Pulley for details on bore diameter d specifications not given in the table.

BXR Models Spline Hub Type

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
 ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
 ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS


POWER SUPPLIES

Specifications (BXR-□-20)

Model	Size	Static friction torque Ts [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate Ebaℓ [J]	Total braking energy Et [J]	Armature pull-in time ta [s]	Armature release time tr [s]	Backlash [°]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size								
BXR-06-20-005	06	5	24	17.6	0.73	32.7	F	UL1333	AWG20	5000	3.43 × 10 ⁻⁵	500	2.0 × 10 ⁵	0.050	0.020	0.5	1.0
BXR-08-20-012	08	12	24	19.4	0.81	29.7	F	UL1333	AWG20	5000	6.75 × 10 ⁻⁵	800	2.0 × 10 ⁵	0.080	0.020	0.4	1.3
BXR-10-20-016	10	16	24	21.5	0.90	26.8	F	UL1333	AWG20	5000	2.32 × 10 ⁻⁴	1500	2.2 × 10 ⁶	0.110	0.050	0.3	1.5
BXR-12-20-030	12	30	24	23.7	0.99	24.3	F	UL1333	AWG20	5000	3.02 × 10 ⁻⁴	1500	2.5 × 10 ⁶	0.120	0.030	0.3	2.5
BXR-14-20-038	14	38	24	31.0	1.29	18.6	F	UL1333	AWG20	3600	9.41 × 10 ⁻⁴	1800	3.0 × 10 ⁶	0.120	0.030	0.2	3.4
BXR-16-20-055	16	55	24	19.0	0.79	30.3	F	UL1333	AWG20	3600	15.2 × 10 ⁻⁴	2000	3.0 × 10 ⁶	0.220	0.100	0.2	4.0

* The armature pull-in time and armature release time are taken during DC switching.
 * Backlash is the value between the rotor and rotor hub.

Dimension (BXR-□-20)

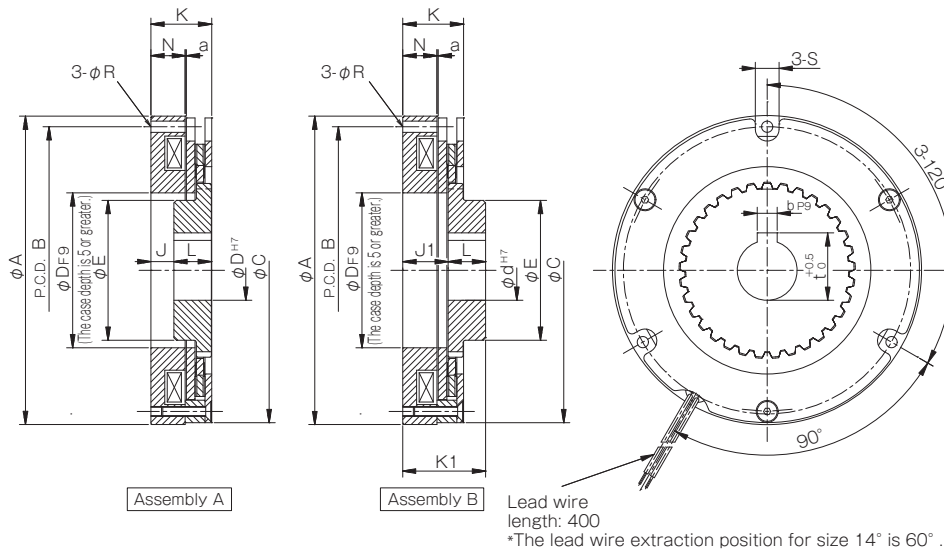


Unit [mm]

Size	Radial direction dimensions							Axial direction dimensions							Bore diameter			
	A	B	C	D	E	R	S	J	J1	L	N	K	K1	a	d	b	t	d max
06	83.5	76	82	47	36	4.5	9	10.5	18	12.5	14.7	25.0	30.5	0.10	20	6	22.5	25
08	93.5	85	92	49	42	4.5	10	11.5	20	13.5	15.7	27.0	33.5	0.10	20	6	22.5	30
10	123.5	115	122	62	56	4.5	9.5	9	18	15	13.7	24.3	33	0.10	24	8	27	40
12	137.5	130	136	65	61	4.5	12	8.7	17.7	15	12.5	25.0	32.7	0.15	24	8	27	45
14	167.5	158	166	80	75	5.5	12	7.2	17.2	16	12.0	25.0	33.2	0.15	28	8	31	55
16	185	175	184	100	82	5.5	12.5	13.6	24.6	18	19.4	32.8	42.6	0.20	28	8	31	65

How to Place an Order

BXR-14-20-038-24V-28DIN

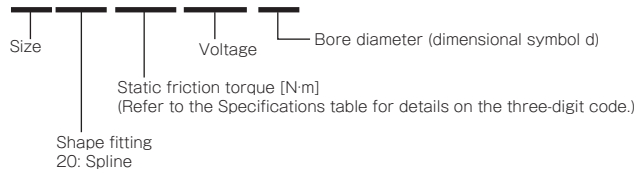

* Contact Miki Pulley for details on bore diameter d specifications not given in the table.

MODELS

BXW

BXR

BXL

BXH

BXL-N

BXR Models

Items Checked for Design Purposes

I Precautions for Handling

■ Brakes

Most electromagnetic braking systems are made using flexible materials. Be careful when handling such parts and materials as striking or dropping them or applying excessive force could cause them to become damaged or deformed.

■ Lead Wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles, or allow them to hang too low.

■ Frictional Surface

Since these are dry brakes, they must be used with the frictional surface dry. Keep water and oil off of the frictional surfaces when handling the brakes.

I Precautions for Use

■ Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. Lead wires are not oil resistant. Consider using a cover or other protection when using in an environment exposed to oil, cutting oil, etc.

■ Operating Temperature

The operating temperature range is -10°C to 40°C . If you will use the product at other temperatures, consult Miki Pulley.

■ Power Supplies

BXR models use commercial AC 100 V or 200 V single phase, full-wave rectified. Select as appropriate for your application. See the table, "Recommended power supplies and circuit protectors," for the power supply devices we recommend.

■ Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme changes in power supply voltage. Make sure to keep power supply voltage to within $\pm 10\%$ of the rated voltage value.

■ Air Gap Adjustment

BXR models do not require air gap adjustment. The brake air gap is adjusted when the braking system is shipped from the factory.

■ Circuit Protectors

If using a power supply that is not equipped with a circuit protector for DC switching, make sure to connect the recommended circuit protector device in parallel with the brake.

Precautions for Mounting

Affixing the Rotor Hub

Affix the rotor hub to the shaft with bolts, snap rings, or the like such that the rotor hub does not touch the armature or stator. Leave at least dimension J on spline hub types, since the rotor hub may contact the armature.

Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread-locking compound to bolts and screws used to install brakes.


Shafts

The shaft tolerance should be h7 class (JIS B 0401).

Accuracy of Brake Attachment Surfaces

Ensure that the concentricity (X) of the centering mark and shaft and the perpendicularity (Y) of the brake mounting surface and shaft do not exceed allowable values.

Size	Concentricity (X)	Perpendicularity (Y)
	T.I.R. [mm]	T.I.R. [mm]
06	0.3	0.04
08	0.3	0.05
10	0.4	0.05
12	0.4	0.06
14	0.6	0.06
16	0.6	0.07

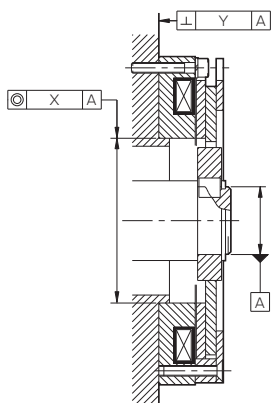

Recommended Power Supplies and Circuit Protectors

Recommended power supplies

Input AC power	Brake voltage	Rectification method	Brake size	Recommended power supply model
AC100V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71-1
AC100V 50/60Hz	DC24V	Single-phase, full-wave	12,14,16	BES-20-72-1
AC200V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71
AC200V 50/60Hz	DC24V	Single-phase, full-wave	12,14,16	BES-20-72

* A DC power supply such as a battery can also be used to supply the 24 V DC required for the brake voltage.

Circuit protector

Brake voltage	Included varistors
DC24V	NVD07SCD082 or an equivalent

* NVD □ SCD □ parts are manufactured by KOA Corporation.

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES

ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES

ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N

BXL Models


Specifications

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate P_{ba} [W]	Total braking energy E_r [J]	Armature pull-in time t_a [s]	Armature release time t_{ar} [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXL-06-10	06	2	DC24	15	0.63	38.4	F	UL3398	AWG22	5000	3.75×10^{-5}	58.3	2.0×10^7	0.035	0.020	0.9
			DC45	12	0.27	169	F									
			DC90	12	0.13	677	F									
BXL-08-10	08	4	DC24	22.5	0.94	25.6	F	UL3398	AWG18	5000	6.25×10^{-5}	91.7	3.5×10^7	0.040	0.020	1.3
			DC45	19	0.41	110	F									
			DC90	19	0.21	440	F									
BXL-10-10	10	8	DC24	28	1.14	21.1	F	UL3398	AWG18	4000	13.75×10^{-5}	108.3	6.2×10^7	0.050	0.025	2.3
			DC45	25	0.54	83.0	F									
			DC90	25	0.27	331	F									
BXL-12-10	12	16	DC24	35	1.46	16.2	F	UL3398	AWG18	3600	33.75×10^{-5}	133.3	9.0×10^7	0.070	0.030	3.4
			DC90	30	0.33	271	F									
BXL-16-10	16	22	DC24	39	1.64	14.6	F	UL3398	AWG18	3000	7.35×10^{-4}	183.3	11.4×10^7	0.100	0.035	5.4
			DC90	39	0.43	207	F									

* The armature pull-in time and armature release time are taken during DC switching.

* See the operating characteristics page for the armature pull-in time and release time during AC-side switching (half-wave rectified).

Dimensions

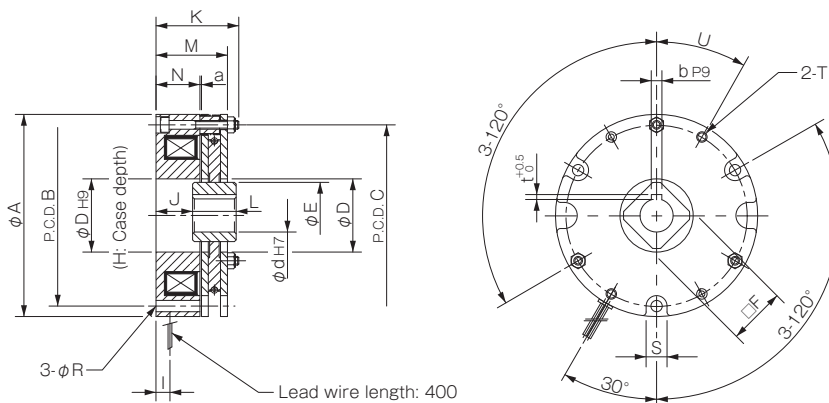

Unit [mm]

Size	A	B	C	D	E	F	H	I	J	K	L	M	N	R	S	T	U	a	d	b	t
06	83	73	73	28	26.5	22	3	10	20.5	39.5	14	33.6	20	4.5	9	2-M5	30°	0.15	11	4	1.5
08	96	86	86	35	32	25	3	12	20	41	17	35	20.8	5.5	10.5	2-M5	30°	0.15	14	5	2
10	116	104	104	42	38	30	3	9.5	21	47.5	25	41	25.3	6.5	12.5	2-M6	30°	0.2	19	6	2.5
12	138	124	124	50	45	35	4	12	19	49.8	30	43.5	23.3	6.5	12.5	2-M6	30°	0.2	24	8	3
16	158	142	143	59	55	45	4	14	22.5	57.5	35	51	27.7	9	15.5	2-M8	40°	0.25	28	8	3

How to Place an Order

BXL-06-10G 24V 11DIN

Size ——— Bore diameter (dimensional symbol d)
 Option number ——— Voltage (Specifications table)
 10: Standard

*Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tables and voltages not listed in the Specifications table.

SERIES

- ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
- ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
- ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N


Options

Made to Order

Release Lever

Option No.: 12

In addition to the manual release tap of the standard product, we also offer an optional manual release lever. See the dimensions table below for the dimensions of brakes with release levers. Other specifications are the same as the standard specifications.

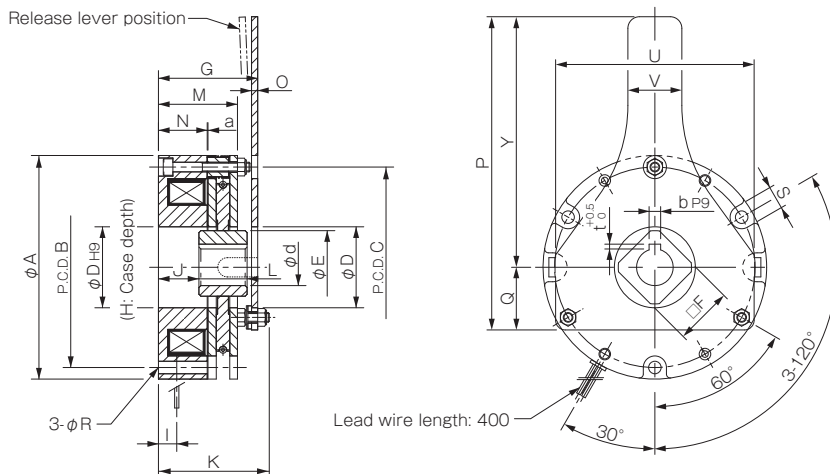


Unit [mm]

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	Y	U	V	S	a	d	b	t
BXL-06-12	83	73	73	28	26.5	22	42.4	3	10	20.5	49.5	14	33.7	20	2.6	88	24	4.5	64	73	16	9	0.15	11	4	1.5
BXL-08-12	96	86	86	35	32	25	44	3	12	20	51	17	35	20.8	2.9	122	27	5.5	95	85	20	10.5	0.15	14	5	2
BXL-10-12	116	104	104	42	38	30	51.2	3	9.5	21	57.5	25	41	25.3	3.2	162.5	32.5	6.5	130	103	28	12.5	0.2	19	6	2.5
BXL-12-12	138	124	124	50	45	35	56.4	4	12	19	64.8	30	43.5	23.3	5	200	40	6.5	160	121	36	12.5	0.2	24	8	3
BXL-16-12	158	142	143	59	55	45	64.9	4	14	22.5	72.5	35	51	27.7	6	230	44	9	186	140	36	15.5	0.25	28	8	3

Quiet Mechanism (Silencing Spring)

Option No.: S1

There is a extremely small structural backlash (see figure on the right) between the rotor and the rotor hub. In applications that are prone to microvibrations of the drive shaft such as single-phase motors, this backlash may produce rattling (banging). The silencing spring for the rotor hub reduces this rattling.

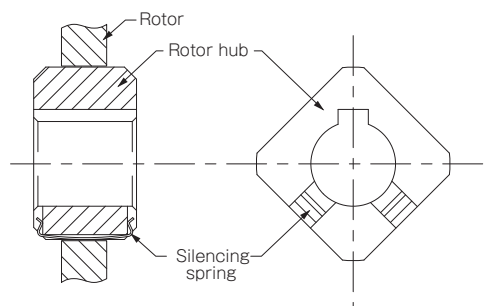

Quiet Mechanism (Pull-in Noise Reduction Mechanism)

Option No.: S2

When the brake is energized, a magnetic circuit is formed, and the armature is pulled to the stator by that magnetic force. At that time, the armature touches the magnetic pole of the stator and a noise is produced. This sound (pull-in noise) is reduced by putting shock absorbing material in the stator's magnetic pole part.

In option S2, in addition to the pull-in noise reduction mechanism, the silencing spring (option S1) is also supplemented.

List of Option Numbers

Description of options	No quiet mechanism	Silencing spring	Silencing spring + Pull-in noise reduction mechanism
No release lever	10	10S1	10S2
Has release lever	12	12S1	12S2

* Option 10 uses standard specifications.

BXL-06-12S1G 24V 11DIN

Option no.

BXL Models

Items Checked for Design Purposes

I Precautions for Handling

■ Brakes

Most electromagnetic braking systems are made using flexible materials. Be careful when handling such parts and materials as striking or dropping them or applying excessive force could cause them to become damaged or deformed.

■ Lead Wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles, or allow them to hang too low.

I Precautions for Mounting

■ Affixing the Rotor Hub

Affix the rotor hub to the shaft with bolts, snap rings, or the like such that the rotor hub does not touch the armature or stator.

■ Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread-locking compound to bolts and screws used to install brakes.

■ Shafts

The shaft tolerance should be h6 or js6 class (JIS B 0401).

■ Accuracy of Brake Attachment Surfaces

Ensure that the concentricity of the centering mark and shaft and the perpendicularity of the brake mounting surface and shaft do not exceed the following allowable values.

• Concentricity of centering mark and shaft

BXL-06: 0.4 T.I.R. or below

BXL-08: 0.4 T.I.R. or below

BXL-10: 0.4 T.I.R. or below

BXL-12: 0.6 T.I.R. or below

BXL-16: 0.6 T.I.R. or below

• Perpendicularity of stator mounting surface


BXL-06: 0.04 T.I.R. or below

BXL-08: 0.05 T.I.R. or below

BXL-10: 0.05 T.I.R. or below

BXL-12: 0.06 T.I.R. or below

BXL-16: 0.07 T.I.R. or below

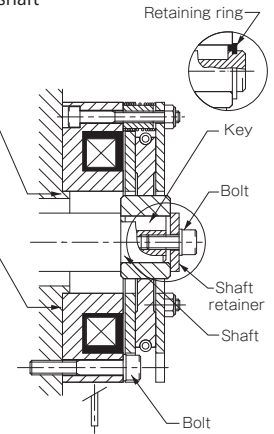

I Precautions for Use

■ Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. Lead wires are not oil resistant. Consider using a cover or other protection when using in an environment exposed to oil, cutting oil, etc.

■ Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme changes in power supply voltage. Make sure to keep power supply voltage to within $\pm 10\%$ of the rated voltage value.

■ Operating Temperature

The operating temperature is -10°C to 40°C (no freezing or condensation). If you will use the product at other temperatures, consult Miki Pulley.

■ Manual Release

BXL models can be released manually.

Alternately tighten screws in two or three of the tap holes on the plate to press the armature.

The screw tips will push against the armature and release it with about a 90° rotation. Do not force the screws in more than that.

■ Air Gap Adjustment

BXL models do not require air gap adjustment. The brake air gap is adjusted when the braking system is shipped from the factory. When first used, no gap adjustment is needed, so do not rotate the nut.

■ Initial Torque

The torque may be lower than the indicated value at initial use. In such cases, run it to break in the frictional surface before use.

■ Circuit Protectors

If using a power supply that is not equipped with a circuit protector for DC switching, make sure to connect the recommended circuit protector device in parallel with the brake.

I Recommended Power Supplies and Circuit Protectors

Recommended power supplies

Input AC power	Brake voltage	Rectification method	Brake size	Recommended power supply model
AC100V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71-1
AC100V 50/60Hz	DC24V	Single-phase, full-wave	12,16	BES-20-72-1
AC100V 50/60Hz	DC45V	Single-phase, half-wave	06,08,10	BEW-1R
AC100V 50/60Hz	DC90V	Single-phase, full-wave	06,08,10,12,16	BEW-1R
AC200V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71
AC200V 50/60Hz	DC24V	Single-phase, full-wave	12,16	BES-20-72
AC200V 50/60Hz	DC90V	Single-phase, half-wave	06,08,10,12,16	BEW-2R

* A DC power supply such as a battery can also be used to supply the 24 V DC required for the brake voltage.

Recommended circuit protectors

Input voltage	Brake voltage	Rectification method	Recommended circuit protector (varistor)
DC24V	DC24V	—	NVD07SCD082 or an equivalent
AC100V 50/60Hz	DC45V	Single-phase, half-wave	NVD07SCD220 or an equivalent
AC100V 50/60Hz	DC90V	Single-phase, full-wave	NVD07SCD220 or an equivalent
AC200V 50/60Hz	DC90V	Single-phase, half-wave	NVD07SCD470 or an equivalent

* NVD □ SCD □ parts are manufactured by KOA Corporation.

* DC24V indicates a product recommended with a stepdown transformer or the like.

Included varistors

Brake voltage	Included varistors
DC24V	NVD07SCD082 or an equivalent
DC45V	No varistor provided
DC90V	No varistor provided

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKESSPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-
ACTUATED MICRO
CLUTCHES & BRAKESELECTROMAGNETIC-
ACTUATED
CLUTCHES & BRAKESELECTROMAGNETIC
CLUTCH & BRAKE
UNITSSPRING-ACTUATED
BRAKEELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N

BXH Models


Specifications

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Lead wire		Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate E_{ba} [J]	Total braking energy E_t [J]	Armature pull-in time t_a [s]	Armature release time t_r [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]		UL style	Size							
BXH-06-10	06	4	DC24	15	0.63	38.4	F	UL3398	AWG22	5000	3.25×10^{-5}	700	2.0×10^6	0.040	0.020	0.9
			DC45	12	0.27	169	F									
			DC90	12	0.13	677	F									
BXH-08-10	08	8	DC24	22.5	0.94	25.6	F	UL3398	AWG18	5000	5.75×10^{-5}	1100	3.5×10^6	0.045	0.020	1.3
			DC45	19	0.41	110	F									
			DC90	19	0.21	440	F									
BXH-10-10	10	16	DC24	28	1.14	21.1	F	UL3398	AWG18	4000	1.30×10^{-4}	1300	6.2×10^6	0.070	0.025	2.3
			DC45	25	0.54	83	F									
			DC90	25	0.27	331	F									
BXH-12-10	12	32	DC24	35	1.46	16.2	F	UL3398	AWG18	3600	3.20×10^{-4}	1600	9.0×10^6	0.090	0.025	3.4
			DC90	30	0.33	271	F									
BXH-16-10	16	44	DC24	39	1.64	14.6	F	UL3398	AWG18	3000	6.93×10^{-4}	2200	11.4×10^6	0.125	0.030	5.4
			DC90	39	0.43	207	F									

* The armature pull-in time and armature release time are taken during DC switching.

* See the operating characteristics page for the armature pull-in time and release time during AC-side switching (half-wave rectified).

Dimensions

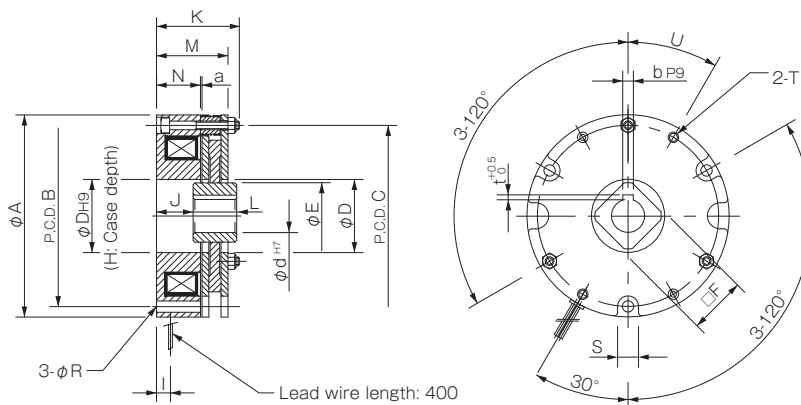

Unit [mm]

Size	A	B	C	D	E	F	H	I	J	K	L	M	N	R	S	T	U	a	d	b	t
06	83	73	73	28	26.5	22	3	10	20.5	39.5	14	33.6	20	4.5	9	2-M5	30°	0.15	11	4	1.5
08	96	86	86	35	32	25	3	12	20	41	17	35	20.8	5.5	10.5	2-M5	30°	0.15	14	5	2
10	116	104	104	42	38	30	3	9.5	21	47.5	25	41	25.3	6.5	12.5	2-M6	30°	0.2	19	6	2.5
12	138	124	124	50	45	35	4	12	19	49.8	30	43.5	23.3	6.5	12.5	2-M6	30°	0.2	24	8	3
16	158	142	143	59	55	45	4	14	22.5	57.5	35	51	27.7	9	15.5	2-M8	40°	0.25	28	8	3

How to Place an Order

BXH-06-10G 24V 11DIN

Size ————
 Option number ————
 10: Standard

————— Bore diameter (dimensional symbol d)
 ———— Voltage (Specifications table)

*Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tables and voltages not listed in the Specifications table.


Options

Made to Order

Release Lever

Option No.: 12

In addition to the manual release tap of the standard product, we also offer an optional manual release lever. See the dimensions table below for the dimensions of brakes with release levers. Other specifications are the same as the standard specifications.

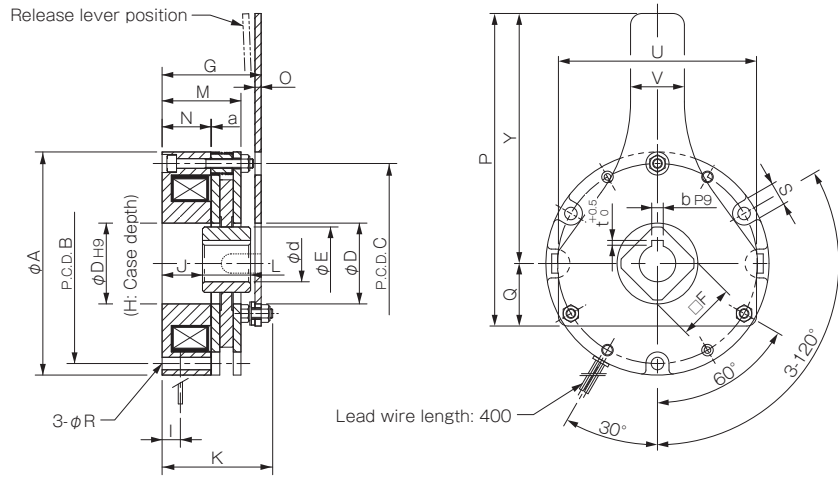


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	Y	U	V	S	a	d	b	t
BXH-06-12	83	73	73	28	26.5	22	42.8	3	10	20.5	49.5	14	33.7	20	2.9	105	24	4.5	81	73	20	9	0.15	11	4	1.5
BXH-08-12	96	86	86	35	32	25	45.4	3	12	20	56	17	35.3	20.8	4	122	27	5.5	95	85	20	10.5	0.2	14	5	2
BXH-10-12	116	104	104	42	38	30	53.9	3	9.5	21	63	25	42.2	25.3	4.5	162.5	32.5	6.5	130	103	28	12.5	0.25	19	6	2.5
BXH-12-12	138	124	124	50	45	35	58.3	4	12	19	70	30	45.4	23.3	5	200	40	6.5	160	121	36	12.5	0.25	24	8	3
BXH-16-12	158	142	143	59	55	45	66.5	4	14	22.5	72.5	35	53.3	27.7	6	230	44	9	186	140	36	15.5	0.25	28	8	3

Unit [mm]

Quiet Mechanism (Silencing Spring)

Option No.: S1

There is an extremely small structural backlash (see figure on the right) between the rotor and the rotor hub. In applications that are prone to microvibrations of the drive shaft such as single-phase motors, this backlash may produce rattling (banging). The silencing spring for the rotor hub reduces this rattling.

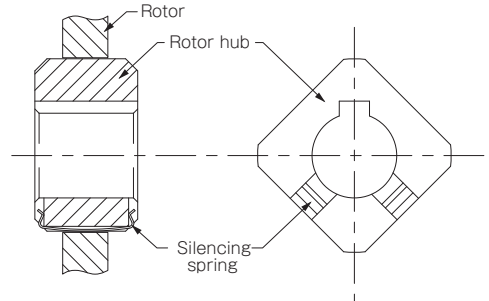


List of Option Numbers

Description of options	No quiet mechanism	With silencing spring
No release lever	10	10S1
Has release lever	12	12S1

* Option 10 uses standard specifications.

BXH-06-12S1G 24V 11DIN



COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

- ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES
- ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES
- ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N

BXH Models

Items Checked for Design Purposes

I Precautions for Handling

■ Brakes

Most electromagnetic braking systems are made using flexible materials. Be careful when handling such parts and materials as striking or dropping them or applying excessive force could cause them to become damaged or deformed.

■ Lead Wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles, or allow them to hang too low.

I Precautions for Mounting

■ Affixing the Rotor Hub

Affix the rotor hub to the shaft with bolts, snap rings, or the like such that the rotor hub does not touch the armature or stator.

■ Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread-locking compound to bolts and screws used to install brakes.

■ Shafts

The shaft tolerance should be h6 or js6 class (JIS B 0401).

■ Accuracy of Brake Attachment Surfaces


Ensure that the concentricity of the centering mark and shaft and the perpendicularity of the brake mounting surface and shaft do not exceed the following allowable values.

• Concentricity of centering mark and shaft

- BXH-06: 0.4 T.I.R. or below
- BXH-08: 0.4 T.I.R. or below
- BXH-10: 0.4 T.I.R. or below
- BXH-12: 0.6 T.I.R. or below
- BXH-16: 0.6 T.I.R. or below

• Perpendicularity of stator mounting surface

- BXH-06: 0.04 T.I.R. or below
- BXH-08: 0.05 T.I.R. or below
- BXH-10: 0.05 T.I.R. or below
- BXH-12: 0.06 T.I.R. or below
- BXH-16: 0.07 T.I.R. or below

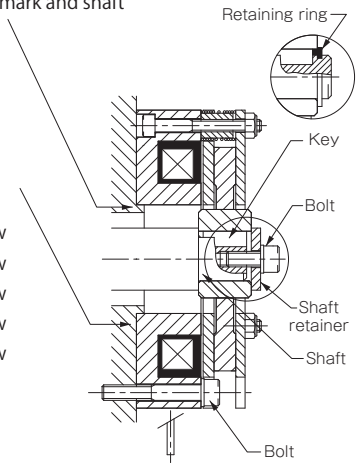

I Precautions for Use

■ Dedicated for Holding

These brakes are dedicated holding brakes. Do not use them for ordinary braking, except for emergency braking in the event of a power outage or the like.

■ Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. Lead wires are not oil resistant. Consider using a cover or other protection when using in an environment exposed to oil, cutting oil, etc.

■ Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme changes in power supply voltage. Make sure to keep power supply voltage to within $\pm 10\%$ of the rated voltage value.

■ Operating Temperature

The operating temperature is -10°C to 40°C (no freezing or condensation). If you will use the product at other temperatures, consult Miki Pulley.

■ Manual Release

BXH models can be released manually.

Alternately tighten screws in two or three of the tap holes on the plate to press the armature.

The screw tips will push against the armature and release it with about a 90° rotation. Do not force the screws in more than that.

■ Air Gap Adjustment

BXH models do not require air gap adjustment. The brake air gap is adjusted when the braking system is shipped from the factory. When first used, no gap adjustment is needed, so do not rotate the nut.

■ Circuit Protectors

If using a power supply that is not equipped with a circuit protector for DC switching, make sure to connect the recommended circuit protector device in parallel with the brake.

I Recommended Power Supplies and Circuit Protectors

Recommended power supplies

Input AC power	Brake voltage	Rectification method	Brake size	Recommended power supply model
AC100V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71-1
AC100V 50/60Hz	DC24V	Single-phase, full-wave	12,16	BES-20-72-1
AC100V 50/60Hz	DC45V	Single-phase, half-wave	06,08,10	BEW-1R
AC100V 50/60Hz	DC90V	Single-phase, full-wave	06,08,10,12,16	BEW-1R
AC200V 50/60Hz	DC24V	Single-phase, full-wave	06,08,10	BES-20-71
AC200V 50/60Hz	DC24V	Single-phase, full-wave	12,16	BES-20-72
AC200V 50/60Hz	DC90V	Single-phase, half-wave	06,08,10,12,16	BEW-2R

* A DC power supply such as a battery can also be used to supply the 24 V DC required for the brake voltage.

Recommended circuit protectors

Input voltage	Brake voltage	Rectification method	Recommended circuit protector (varistor)
DC24V	DC24V	—	NVD07SCD082 or an equivalent
AC100V 50/60Hz	DC45V	Single-phase, half-wave	NVD07SCD220 or an equivalent
AC100V 50/60Hz	DC90V	Single-phase, full-wave	NVD07SCD220 or an equivalent
AC200V 50/60Hz	DC90V	Single-phase, half-wave	NVD07SCD470 or an equivalent

* NVD □ SCD □ parts are manufactured by KOA Corporation.

* DC24V indicates a product recommended with a stepdown transformer or the like.

Included varistors

Brake voltage	Included varistors
DC24V	NVD07SCD082 or an equivalent
DC45V	No varistor provided
DC90V	No varistor provided

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKESSPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-
ACTUATED MICRO
CLUTCHES & BRAKESELECTROMAGNETIC-
ACTUATED
CLUTCHES & BRAKESELECTROMAGNETIC
CLUTCH & BRAKE
UNITSSPRING-ACTUATED
BRAKEELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N


BXL-N Models

Specifications

Model	Size	Static friction torque T_s [N·m]	Coil (at 20°C)				Heat resistance class	Max. rotation speed [min ⁻¹]	Rotating part moment of inertia J [kg·m ²]	Allowable braking energy rate Pbal [W]	Total braking energy Et [J]	Armature pull-in time t_{ai} [s]	Armature release time t_{ar} [s]	Applicable motor output (Reference) Four poles [kW]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [Ω]									
BXL-08-10N-002	08	2	24	19.0	0.793	30.3	F	3600	6.3×10^{-5}	60.0	5.0×10^7	0.030	0.050	0.1/0.2	1.4
			99	19.0	0.192	515.8	F								
			171	19.0	0.111	1539	F								
BXL-08-10N-004	08	4	24	19.0	0.793	30.3	F	3600	6.3×10^{-5}	60.0	5.0×10^7	0.040	0.040	0.4	1.4
			99	19.0	0.192	515.8	F								
			171	19.0	0.111	1539	F								
BXL-10-10N-008	10	8	24	28.0	1.166	20.6	F	3600	13.8×10^{-5}	70.0	8.0×10^7	0.050	0.050	0.75	2.7
			99	28.0	0.283	350.0	F								
			171	28.0	0.164	1044	F								
BXL-10-10N-015	10	15	24	28.0	1.166	20.6	F	3600	13.8×10^{-5}	70.0	8.0×10^7	0.070	0.030	1.5	2.7
			99	28.0	0.283	350.0	F								
			171	28.0	0.164	1044	F								
BXL-12-10N-022	12	22	24	35.0	1.460	16.4	F	3600	33.8×10^{-5}	90.0	12.0×10^7	0.080	0.060	2.2	4.7
			99	35.0	0.353	280.1	F								
			171	35.0	0.205	835.5	F								
BXL-12-10N-030	12	30	24	35.0	1.460	16.4	F	3600	33.8×10^{-5}	90.0	12.0×10^7	0.100	0.030	3.0	4.7
			99	35.0	0.353	280.1	F								
			171	35.0	0.205	835.5	F								
BXL-16-10N-040	16	40	24	42.0	1.753	13.7	F	1800	73.5×10^{-5}	120.0	16.0×10^7	0.100	0.070	3.7	6.3
			99	42.0	0.424	233.3	F								
			171	42.0	0.246	696.1	F								
BXL-16-10N-060	16	60	24	55.0	2.294	10.5	F	1800	74.6×10^{-5}	150.0	16.0×10^7	0.100	0.050	5.5	6.7
			99	55.0	0.556	178.1	F								
			171	55.0	0.322	531.6	F								
BXL-16-10N-080	16	80	24	55.0	2.294	10.5	F	1800	74.6×10^{-5}	150.0	16.0×10^7	0.100	0.030	7.5	6.7
			99	55.0	0.556	178.1	F								
			171	55.0	0.322	531.6	F								

*The armature pull-in time and armature release time are taken during DC switching.


Dimensions

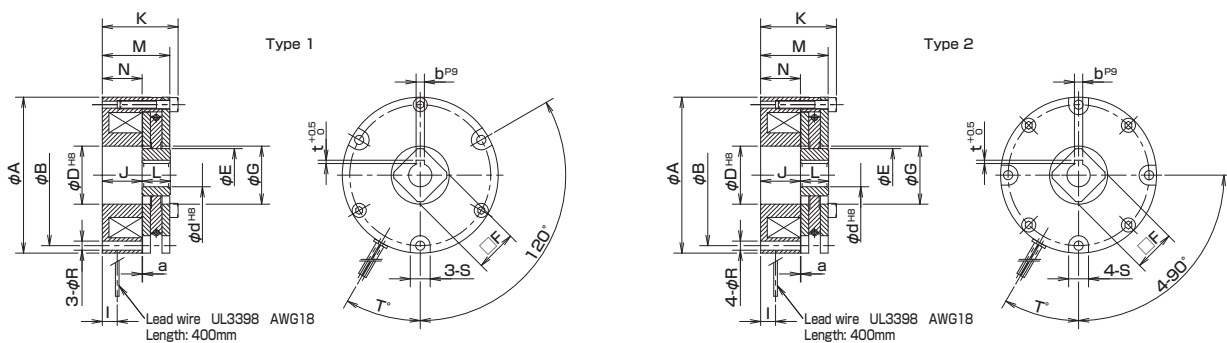

Unit [mm]

Model	Type	A	B	D	E	F	G	I	J	K	L	M	N	R	S	T	a	d	b	t
BXL-08-10N-002	1	94	85	35	32	25	35	9	24	45.7	17	40.7	24	5.5	12	30	0.3	11	4	1.5
BXL-08-10N-004	1	94	85	35	32	25	35	9	24	45.7	17	40.7	24	5.5	12	30	0.3	14	5	2
BXL-10-10N-008	1	124	110	40	38	30	42	10	22	48.7	25	42.7	26	6.5	12	30	0.3	18	6	2.5
BXL-10-10N-015	1	124	110	40	38	30	42	10	22	48.7	25	42.7	26	6.5	12	30	0.3	20	6	2.5
BXL-12-10N-022	1	150	130	49	45	35	50	18	25	57.1	30	51.1	29	6.5	14	30	0.3	24	8	3
BXL-12-10N-030	1	150	130	49	45	35	50	18	25	57.1	30	51.1	29	6.5	14	30	0.3	24	8	3
BXL-16-10N-040	1	165	150	62	55	45	62	18	24	63.1	35	55.1	28	9	15	30	0.3	28	8	3
BXL-16-10N-060	2	165	150	64	61	50	64	20	29	68.1	35	60.1	33	9	15	15	0.3	37	10	3.5
BXL-16-10N-080	2	165	150	64	61	50	64	20	29	68.1	35	60.1	33	9	15	15	0.3	37	10	3.5

How to Place an Order

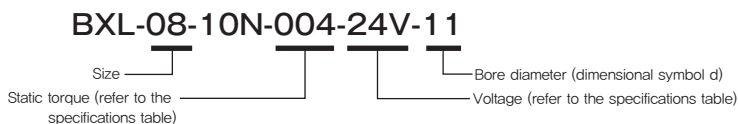

* Contact Miki Pulley for assistance with bore diameters, d, not listed in the Dimensions tables and voltages not listed in the Specifications table.


Options

Plate Installation

Standard installation is performed using stator installation, but a plate installation specification is also available as an option. Please contact Miki Pulley for assistance if desiring to use plate installation.

Quiet Mechanism

There is a slight backlash between the rotor and the rotor hub. The armature may also strike the surface of the magnetic poles on the stator when electricity flows, generating a noise. There is a quiet mechanism available that works to suppress such clattering noises as well as operating noise. Please contact Miki Pulley for details.

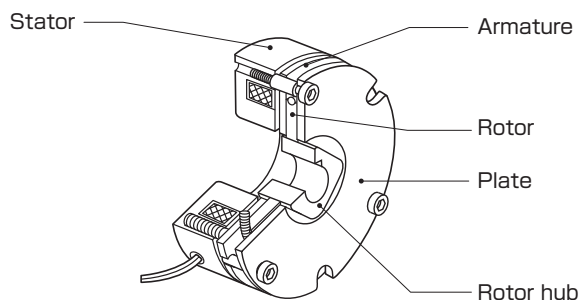

Items Checked for Design Purposes

Precautions for Handling

Brakes

Most electromagnetic braking systems are made using flexible materials. Be careful when handling such parts and materials as striking or dropping them or applying excessive force could cause them to become damaged or deformed.

Lead Wires

Be careful not to pull excessively on the brake lead wires, bend them at sharp angles, or allow them to hang too low.

Frictional Surface

Since these are dry brakes, they must be used with the frictional surface dry. Keep water and oil off of the frictional surfaces when handling the brakes.

Precautions for Use

Environment

These brake units are dry braking systems, meaning that the torque will drop if oil residue, moisture, or other liquids get onto friction surfaces. Lead wires are not oil resistant. Consider using a cover or other protection when using in an environment exposed to oil, cutting oil, etc.

Operating Temperature

The operating temperature is from 0°C to 40°C (no freezing or condensation). If you will use the product at other temperatures, consult Miki Pulley.

Power Supplies

BXL-N models use commercial AC 220 V or 380 V single phase, half-wave rectified. Select as appropriate for your application.

Power Supply Voltage Fluctuations

Full braking performance may not be guaranteed with extreme changes in power supply voltage. Make sure to keep power supply voltage to within $\pm 10\%$ of the rated voltage value.

Air Gap Adjustment

BXL-N models do not require air gap adjustment. The brake air gap is adjusted when the braking system is shipped from the factory.

Circuit Protectors

If using a power supply for separate DC switching, make sure to connect the recommended circuit protector device in parallel with the brake.

Recommended Power Supplies and Circuit Protectors

Model	Rectification method	Frequency [Hz]	Input AC voltage [V]	DC output voltage *1 [V]	Recommended circuit protectors *2 (Varistor)
BEM-2T	Single-phase, half-wave	50/60	AC220	DC99	NVD07SCD220 or an equivalent
BEM-4T	Single-phase, half-wave	50/60	AC380	DC171	NVD14SCD820 or an equivalent

*1 The values given are for when there is electricity flowing to the brake coil.

*2 NVD □ SCD □ parts are manufactured by KOA Corporation.

Precautions for Mounting

Precautions for Mounting

Use a bolt or snap ring to lock the rotor hub onto the shaft.

Shaft


The shaft tolerance should be h7 class (JIS B 0401).

Bolts and Screws

Implement screw-locking measures such as use of an adhesive thread-locking compound to bolts and screws used to install brakes.

Accuracy of Brake Attachment Surfaces

Ensure that the concentricity (X) of the centering mark and shaft and the perpendicularity (Y) of the brake mounting surface and shaft do not exceed allowable values.

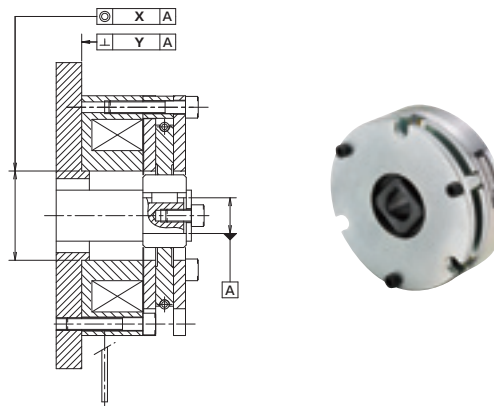

Allowable concentricity and perpendicularity values for the BXL-N Models

Size	Concentricity (X)	Perpendicularity (Y)
	T.I.R. [mm]	T.I.R. [mm]
08	0.4	0.05
10	0.4	0.05
12	0.6	0.05
16	0.6	0.05

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO CLUTCHES & BRAKES

ELECTROMAGNETIC-ACTUATED CLUTCHES & BRAKES

ELECTROMAGNETIC CLUTCH & BRAKE UNITS

SPRING-ACTUATED BRAKE

ELECTROMAGNETIC TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL

BXH

BXL-N

Selection Procedure for Brakes for Braking



Consideration of Required Torque to Brake Loads

To select the appropriate brake size, you must find the torque required for braking T , and then select a size of brake that delivers a greater torque than T .

● **Consideration of cases when load conditions are not clearly known**

When load conditions are unclear, assuming that the motor has been selected correctly for the load, the approximate torque can be obtained from the motor output using the following equation.

$$T_M = \frac{9550 \times P}{n_r} \times \eta \quad [\text{N} \cdot \text{m}]$$

P : Motor output [kW]
 n_r : Brake shaft rotation speed [min^{-1}]
 η : Transmission efficiency from motor to brake

● **Consideration when load conditions can be clearly ascertained**

When load conditions can be clearly ascertained, the torque T required for braking can be found using the following equation.

$$T = \left(\frac{J \times n}{9.55 \times t_{ab}} \pm T_\ell \right) \times K \quad [\text{N} \cdot \text{m}]$$

J : Total moment of inertia of load side [$\text{kg} \cdot \text{m}^2$]
 n : Rotation speed [min^{-1}]
 t_{ab} : Actual braking time [s]
 T_ℓ : Load torque [N·m]
 K : Safety factor (see table below)

The sign of load torque T_ℓ is minus when the load works in the direction that assists braking and plus when it works in the direction that hinders braking. The actual braking time t_{ab} is the time required from the start of braking torque generation until braking is complete. When this is not clearly known at the selection stage, a guideline value is used that factors in service life and the like.

Load state	Factor
Low-inertia/low-frequency constant load	1.5
Ordinary use with normal inertia	2
High-inertia/high-frequency load fluctuation	3



Provisional Size Selection

Select a brake of a size for which the torque T found in the equation of step 1 satisfies the following equation.

A brake of a size for which torque T found from the equations above satisfies the following equation must be selected.

$T_b > T$ (or T_M) [N·m] T_b : Brake torque [N·m] * For brake torque, treat T_s as equaling T_b . (T_s : Static friction torque from specifications table)



Consideration of Energy

When the load required for braking is sufficiently small, the size can be selected considering only torque T as described above. Given the effects of heat generated by braking, however, the following equation must be used to confirm that the operation frequency per unit time and the total number of operations (service life) meet the required specifications.

Use the following equation to find the energy E_b required for a single braking operation.

$$E_b = \frac{J \times n^2}{182} \times \frac{T_b}{T_b \pm T_\ell} \quad [\text{J}]$$

The sign of load torque T_ℓ is plus when the load works in the direction that assists braking and minus when it works in the direction that hinders braking.

● **Confirm the frequency S of operations that can be performed per minute**

Find the frequency of operations that can be performed per minute using the equation at right to confirm that the desired operation frequency is sufficiently smaller than the value found.

$$S = \frac{60 \times P_{ba\ell}}{E_b} \quad [\text{times/min}]$$

$P_{ba\ell}$: Allowable braking energy rate [W]
 E_b : Energy required for one braking operation [J]

● **Confirm the total number of operations (service life)**

Find the total number of operations (service life) using the equation at right, and then check that it meets the desired service life.

$$L = \frac{E_T}{E_b} \quad [\text{times}] \quad E_T: \text{Total braking energy [J]}$$



Consideration of Braking Time

When there are limits on the time required to decelerate or stop the load, use the equation at right to confirm that the total braking time t_{tb} satisfies requirements.

$$t_{tb} = t_{id} + t_{ar} + t_{ab}$$

t_{ar} : Armature release time [s]
 t_{id} : Initial delay time [s]

Here, actual braking time t_{ab} is the time from the start of braking torque generation to the completion of braking. Find it with the following equation.

$$t_{ab} = \frac{J \times n}{9.55 \times (T_b \pm T_\ell)} \quad [\text{s}]$$

The sign of load torque T_ℓ is plus when the load works in the direction that assists braking and minus when it works in the direction that hinders braking.



Consideration of Stopping Precision

To confirm stopping precision, find the stopping angle θ (rotation) using the following equation.

$$\theta = 6 \times n \times \left(t_{id} + t_{ar} + \frac{1}{2} t_{ab} \right) \quad [^\circ]$$

t_{ar} : Armature release time [s]
 t_{id} : Initial delay time [s]

The variation in stopping precision--i.e., stopping precision $\Delta\theta$ --can be found empirically with the following equation and used as a guide.

$$\Delta\theta = \pm 0.15 \times \theta \quad [^\circ]$$

Selection Procedure for Brakes for Holding

1

Consideration of Required Torque to Hold Loads

Use the following equation to find the torque T required to hold a load while stationary.

$$T = T_{\ell \max} \times K \text{ [N}\cdot\text{m]}$$

$T_{\ell \max}$: Max. load torque [N·m]

K : Safety factor (see table at right)

Load state	Factor
Low inertia/small load fluctuations	1.5
Ordinary use with normal inertia	2
High inertia/large load fluctuations	3

2

Provisional Selection of Size

A brake of a size for which torque T found from the equations above satisfies the following equation must be selected.

$$T_s > T \text{ [N}\cdot\text{m]}$$

T_s : Static friction torque of brake [N·m]

3

Consideration of Energy

When considering a brake with the objective of holding loads, braking is limited to emergency braking.

Use the following equation to find the braking energy E_b for a single operation required for emergency braking. You must confirm that this result is sufficiently smaller than the allowable braking energy $E_{ba\ell}$ of the selected brake.

$$E_b = \frac{J \times n^2}{182} \times \frac{T_b}{T_b \pm T_{\ell}} \text{ [J]}$$

J : Total moment of inertia on load side [kg·m²]

n : Rotation speed [min⁻¹]

T_b : Brake torque [N·m]

$T_{\ell \max}$: Max. load torque [N·m]

The sign of maximum load torque $T_{\ell \max}$ is plus when the load works in the direction that assists braking and minus when it works in the direction that hinders braking.

$$E_b \ll E_{ba\ell} \text{ [J]}$$

When using brakes for both holding and braking and the specification is indicated by allowable braking energy rate $P_{ba\ell}$, check under the following conditions.

$$E_b \ll 60 \times P_{ba\ell} \text{ [J]}$$

4

Consideration of Number of Operations

The total number of braking operations (service life) when performing emergency braking L must be found using the following equation to confirm that required specifications are satisfied.

$$L = \frac{E_T}{E_b} \text{ [times]} \quad E_T: \text{ Total braking energy [J]}$$

Note that the frequency of emergency braking will also vary with operating environment; however, it should be about once per minute or better. When the braking energy of a single operation E_b is 70% or more of the allowable braking energy $E_{ba\ell}$, however, allow the brake to cool sufficiently after emergency braking before resuming use.

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKESSPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-
ACTUATED MICRO
CLUTCHES & BRAKESELECTROMAGNETIC-
ACTUATED
CLUTCHES & BRAKESELECTROMAGNETIC
CLUTCH & BRAKE
UNITSSPRING-ACTUATED
BRAKEELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL


BXH

BXL-N

BXW/BXR/BXL/BXH Models

Selection Example 1

I Braking Brakes Used in Raising Loads



Selection of a brake to brake the load is as follows, as the above figure illustrates.

Motor (brake shaft) rotation speed	n	1800 [min ⁻¹]
Load shaft rotation speed	n _l	60 [min ⁻¹]
Moment of inertia of motor-side gear	J ₁	1.5 × 10 ⁻² [kg·m ²]
Moment of inertia of load-side gear	J ₂	1.5 × 10 ⁻² [kg·m ²]
Moment of inertia of load-side drum	J ₃	4.30 [kg·m ²]
Moment of inertia of motor with speed reducer	J _M	6 × 10 ⁻³ [kg·m ²]
Moment of inertia of load	J _A	15.67 [kg·m ²]
Load-side torque	T	62.5 [N·m]
Number of braking operations of brake	L	53,000 cycles or more
Brake operating frequency	S	0.1 [cycles/min]

* The number of braking operations and operation frequency treat one ascending operation and one descending operation together as one cycle.

* The number of braking operations of the brake is treated as 6 (operations/h) × 8 (h/day) × 365 (days/year) × 3 (years).

■ Consideration of Torque

The torque required for braking is calculated from the above specifications, compared to the dynamic friction torque in the catalog, and the appropriate brake size is selected.

- Calculating the inertial moment converted to brake shaft inertial moment J_B

We use the following equation to calculate the moment of inertia converted to the brake shaft (motor shaft) moment of inertia J_B[kg·m²]. Here, R represents the ratio of the motor rotation speed to the load shaft rotation speed.

$$J_B = J_M + (J_1 + J_2 + J_3 + J_A) \times R^2 \text{ [kg} \cdot \text{m}^2\text{]}$$

$$J_B = 6 \times 10^{-3} + (1.5 \times 10^{-2} + 1.5 \times 10^{-2} + 4.30 + 15.67) \times (60/1800)^2 \\ \approx 2.8 \times 10^{-2} \text{ [kg} \cdot \text{m}^2\text{]}$$

- Calculating the load torque converted to brake shaft load torque T_ℓ
We use the following equation to calculate the load torque converted to the brake shaft (motor shaft) load torque T_ℓ [N·m]. However, η indicates the transmission efficiency, which is 0.85 in this selection.

$$T_\ell = R \times T / \eta \text{ [N} \cdot \text{m}\text{]}$$

$$T_\ell = 60/1800 \times 62.5 / 0.85 \approx 2.45 \text{ [N} \cdot \text{m}\text{]}$$

- Calculating the torque required for braking T
Use the following equation to calculate the torque required for braking T [N·m].
Here, the conditions are set as follows.

* The guideline for actual braking time t_{ab} is 2.0 [s].

* The sign of load torque T_ℓ is minus when ascending because the load works in the direction that assists braking and plus when descending because the load works in the direction that hinders braking.

* Select a safety factor K of 3.0, based on operating conditions.

Ascending

$$T_{up} = \left(\frac{J_B \times n}{9.55 \times t_{ab}} - T_\ell \right) \times K$$

$$T_{up} = \left(\frac{2.8 \times 10^{-2} \times 1800}{9.55 \times 2.0} - 2.45 \right) \times 3.0 \approx 0.57 \text{ [N} \cdot \text{m}\text{]}$$

Descending

$$T_{DOWN} = \left(\frac{J_B \times n}{9.55 \times t_{ab}} + T_\ell \right) \times K$$

$$T_{DOWN} = \left(\frac{2.8 \times 10^{-2} \times 1800}{9.55 \times 2.0} + 2.45 \right) \times 3.0 \approx 15.3 \text{ [N} \cdot \text{m}\text{]}$$

Since the result of the above shows that required torque is 15.3 [N·m], check the specifications in the catalog and select size 12 (dynamic friction torque of 16.0 [N·m]) of the BXL models of brakes for braking.

■ Consideration of Energy

Confirm that the brake selected based on required torque satisfies the required specifications for number of braking operations and braking frequency.

- Calculating the total moment of inertia J
Adding the inertial moment converted to brake shaft inertial moment J_b that was just calculated to the inertial moment of the rotating parts of the provisionally selected BXL-12 (catalog value of 33.75×10^{-5}), we arrive at the total moment of inertia.

$$J = 2.8 \times 10^{-2} + 33.75 \times 10^{-5} \\ \approx 2.83 \times 10^{-2} [\text{kg} \cdot \text{m}^2]$$

- Calculating the amount of energy required for one braking operation E_b
The calculated total moment of inertia is used to calculate the energy required by a single braking operation. Here, the sign of load torque T_ℓ is plus when ascending because the load works in the direction that assists braking and minus when descending because the load works in the direction that hinders braking.

Ascending

$$E_{b\text{up}} = \frac{J \times n^2}{182} \times \frac{T_b}{T_b + T_\ell} \\ E_{b\text{up}} = \frac{2.83 \times 10^{-2} \times 1800^2}{182} \times \frac{16.0}{16.0 + 2.45} \\ \approx 437 [\text{J}]$$

Descending

$$E_{b\text{DOWN}} = \frac{J \times n^2}{182} \times \frac{T_b}{T_b - T_\ell} \\ E_{b\text{DOWN}} = \frac{2.83 \times 10^{-2} \times 1800^2}{182} \times \frac{16.0}{16.0 - 2.45} \\ \approx 595 [\text{J}]$$

- Confirm the frequency S of operations that can be performed per minute
Substitute the energy required for a single braking E_b calculated above and the allowable braking energy rate $P_{ba\ell}$ for the BXL-12 (catalog value 133.3 W) into the following equation and calculate the frequency S of operations that can be performed per minute.

Ascending

$$S_{\text{up}} = \frac{60 \times P_{ba\ell}}{E_{b\text{up}}} \\ S_{\text{up}} = \frac{60 \times 133.3}{437} \\ \approx 18.3 [\text{times/min.}]$$

Descending

$$S_{\text{DOWN}} = \frac{60 \times P_{ba\ell}}{E_{b\text{DOWN}}} \\ S_{\text{DOWN}} = \frac{60 \times 133.3}{595} \\ \approx 13.4 [\text{times/min.}]$$

The desired operation frequency is sufficiently smaller than the calculated operation frequency, so the specification is satisfied. Note that the braking energy rate (catalog value) used in the calculation is the value under ideal conditions, so the desired operation frequency needs to be sufficiently small.

$$13.4 [\text{times/min.}] \gg 0.1 [\text{times/min.}]$$

- Calculating the total number of operations (service life)
Substituting in the just-calculated energy required for a single braking E_b and the BXL-12 total frictional energy E_T (catalog value of 9.0×10^7 [J]), we arrive at the total number of operations L .

If the energy of a single cycle of ascending and descending E_b is:

$$E_b = E_{b\text{up}} + E_{b\text{DOWN}} \\ E_b = 1032 [\text{J}]$$

The total number of operations L is:

$$L = \frac{E_T}{E_b} \\ L = \frac{9.0 \times 10^7}{1032} \\ \approx 87209 [\text{cycles}]$$

The desired total number of operations is fewer than the calculated total number of operations (service life), so the specification is satisfied.

$$87,209 [\text{cycles}] > 53,000 [\text{cycles}]$$

■ Consideration of Braking Time

Total braking time t_{tb} is calculated as the sum of actual braking time t_{ab} , armature release time t_{ar} , and the initial delay time from start of command input to start of operating input t_{id} .

Here, the actual braking time is expected to be greater in the descending direction, so only the case of descending is considered. The sign of the load torque T_ℓ is minus, since it is in the direction that impedes braking.

$$t_{ab} = \frac{J \times n}{9.55 \times (T_b - T_\ell)} \\ t_{ab} = \frac{2.83 \times 10^{-2} \times 1800}{9.55 \times (16.0 - 2.45)} \\ \approx 0.39 [\text{s}]$$

Here, the armature release time t_{ar} of the BXL-12 from the catalog is 0.03 [s]. The initial delay time t_{id} is the delay of the operation of relays and the like, so we use 0.025 [s], the typical relay operation time. Thus, the total braking time t_{tb} is:

$$t_{tb} = 0.025 + 0.030 + 0.39 \\ \approx 0.445 [\text{s}]$$

■ Consideration of Stopping Precision

When stopping precision (stopping distance) is restricted, calculate stopping precision using the following equations.

$$\theta = 6 \times n \times (t_{id} + t_{ar} + 1/2 \times t_{ab}) \\ = 2700 [^\circ]$$

The variation in stopping precision—i.e., stopping precision $\Delta\theta$ —can be found empirically with the following equation and used as a guide.

$$\Delta\theta = \pm 0.15 \times \theta \\ = \pm 405 [^\circ]$$

This angle is the angle at the brake shaft, so when the stopping precision θ_{max} is $2700 + 405 = 3105 [^\circ]$ and the drum diameter D_d is 0.5 [m], the braking distance B_d of load W is:

$$B_d = \theta_{\text{max}} / 360 \times R \times \pi \times D_d \\ = (3105 / 360) \times (60 / 1800) \times \pi \times 0.5 \\ = 0.45 [\text{m}]$$

If there is no problem with the braking time and stopping precision, BXL-12 can be selected.

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKESSPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-
ACTUATED MICRO
CLUTCHES & BRAKESELECTROMAGNETIC-
ACTUATED
CLUTCHES & BRAKESELECTROMAGNETIC
CLUTCH & BRAKE
UNITSSPRING-ACTUATED
BRAKEELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL


BXH

BXL-N

BXW/BXR/BXL/BXH Models

Selection Example 2

Holding Brakes Used in Ball Screw Drive of Loads



Selection of a brake to brake the load is as follows, as the above figure illustrates.

Motor (brake shaft) rotation speed	n	1800 [min ⁻¹]
Load shaft rotation speed	n _i	900 [min ⁻¹]
Moment of inertia of motor	J _M	0.001 [kg·m ²]
Mass of load	M	500 [kg]
Lead of feed screw	P	0.01 [m]
Shaft diameter of feed screw	D	0.05 [m]
Length of feed screw	l	1 [m]
Friction coefficient of feed screw	μ	0.2

■ Consideration of Torque

The torque required for holding is calculated from the specifications at left, compared to the static friction torque in the catalog, and the appropriate brake size is selected.

- Calculating load torque converted to brake shaft load torque T_{ℓ}

Use the following equation to calculate the load torque T_{ℓ} [N·m]. Here, there is no external force F [N·m], gravitational acceleration g [m/s²] is 9.8 [m/s²], R is the ratio of motor rotation speed to load shaft rotation speed, and η is transmission efficiency, which in this selection is 0.85.

$$T_{\ell} = R \times 1/2 \pi \times P \times (F + \mu M g) / \eta \text{ [N} \cdot \text{m]}$$

$$T_{\ell} = (900/1800) \times 1/2 \pi \times 0.01 \times (0 + 0.2 \times 500 \times 9.8) / 0.85 \\ \approx 0.92 \text{ [N} \cdot \text{m]}$$

- Calculating the required holding torque T

Use the following equation to calculate the required holding torque T . Here, safety factor K is 2.

$$T = T_{\ell} \times K \text{ [N} \cdot \text{m]}$$

$$T = 0.92 \times 2$$

$$\approx 1.84 \text{ [N} \cdot \text{m]}$$

Since the result of the above shows that required torque is 1.84 [N·m], check the specifications in the catalog and select size 06 (static friction torque of 4.0 [N·m]) of the BXH models of brakes for holding.

■ Consideration of Energy During Emergency Braking

Brakes selected based on required holding torque are designed primarily for holding, so their braking operations are limited to emergency braking and the like. It is therefore necessary to check that the braking energy per braking operation E_b during emergency braking does not exceed the allowable braking energy $E_{ba\ell}$.

- Calculating the moment of inertia of feed screws

Given a feed screw whose shaft has a length of 1 [m], diameter of 0.05 [m], and specific gravity of 7.8, the feed screw moment of inertia J_A [kg·m²] is:

$$J_A = \frac{1}{8} \times M \times D^2$$

$$= \frac{1}{8} \times (0.025^2 \times \pi \times 1 \times 7.8 \times 1000) \times 0.05^2$$

$$\approx 0.0048 [\text{kg} \cdot \text{m}^2]$$

- Calculating the moment of inertia of a linearly moving object

Use the following equation to calculate the moment of inertia J_x [kg·m²] of a linearly moving object.

$$J_x = J_A + \frac{M \cdot P^2}{4 \pi^2}$$

$$= 0.0048 + \frac{500 \times 0.01^2}{4 \times \pi^2}$$

$$\approx 6.1 \times 10^{-3} [\text{kg} \cdot \text{m}^2]$$

- Calculating the total inertial moment converted to brake shaft inertial moment

The moment of inertia J_x [kg·m²] of a linearly moving object found above is added to the moment of inertia of the rotating parts of the provisionally selected BXH-06 (catalog value of 3.25×10^{-5} kg·m²) and the motor's moment of inertia J_M [kg·m²] to calculate the total moment of inertia. Here, R represents the ratio of the motor rotation speed to the load shaft rotation speed.

$$J = J_x \times R^2 + J_M + J_B [\text{kg} \cdot \text{m}^2]$$

$$= 6.1 \times 10^{-3} \times \left(\frac{1}{2}\right)^2 + 0.001 + 3.25 \times 10^{-5}$$

$$= 2.56 \times 10^{-3} [\text{kg} \cdot \text{m}^2]$$

- Consideration of energy

We calculate the braking energy per braking E_b required for emergency braking using the following equation. Here, the brake torque T_b [N·m] is the catalog value of 4.0 [N·m] and the sign of the load torque T_ℓ is plus, since it works in the direction that assists braking.

$$E_b = \frac{J \cdot n^2}{182} \times \frac{T_b}{T_b + T_\ell}$$

$$E_b = \frac{2.56 \times 10^{-3} \times 1800^2}{182} \times \frac{4.0}{4.0 + 0.92}$$

$$\approx 37.1 [\text{J}]$$

Since the calculated braking energy E_b does not exceed the BXH-06's allowable braking energy $E_{ba\ell}$ (catalog value of 700 [J]), the specification is satisfied.

$$37.1 [\text{J}] < 700 [\text{J}]$$

■ Consideration of Number of Operations

The total number of braking operations (service life) L when doing emergency braking can be found using the following equation. Here, the BXH-06's total braking energy E_T is the catalog value of 2.0×10^6 [J].

$$L = \frac{E_T}{E_b}$$

$$L = \frac{2.0 \times 10^6}{37.1}$$

$$\approx 53908 [\text{times}]$$

With these specifications, BXH-06 can be selected.

Note that the frequency of emergency braking has a major impact on service life, so it should be about once per minute or better.

COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC
CLUTCHES & BRAKESSPEED CHANGERS
& REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

SERIES

ELECTROMAGNETIC-ACTUATED MICRO
CLUTCHES & BRAKESELECTROMAGNETIC-ACTUATED
CLUTCHES & BRAKESELECTROMAGNETIC
CLUTCH & BRAKE
UNITSSPRING-ACTUATED
BRAKEELECTROMAGNETIC
TOOTH CLUTCHES

BRAKE MOTORS

POWER SUPPLIES

MODELS

BXW

BXR

BXL


BXH

BXL-N

BXW/BXR/BXL/BXH Models

Operating Characteristics

I Operating Time

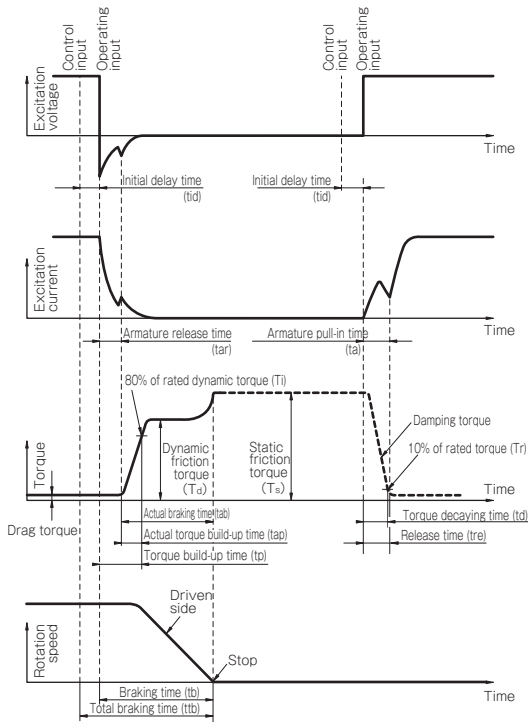

tar: Armature release time

The time from when current shuts off until the armature returns to its position prior to being pulled in and torque begins to be generated

tap: Actual torque build-up time

The time from when torque first begins to be generated until it reaches 80% of rated torque

tp: Torque build-up time

The time from when current flow is shut off until torque reaches 80% of rated torque

ta: Armature pull-in time

The time from when current flow first starts until the armature is pulled in and torque disappears

tid: Initial delay time

The time from start of command input to actuation input or release input to the main brake body

BXW Models

						Unit [s]
Type	Voltage	Size	Switching	tar	ta	
L type (Braking use)	12V	01	DC side	0.015	0.008	
	24V	02		0.015	0.008	
	45V	03		0.025	0.025	
	90V	04		0.030	0.030	
	180V	05		0.035	0.035	
H type (Holding and braking use)	12V	01	DC side	0.010	0.010	
	24V	02		0.010	0.010	
	45V	03		0.020	0.035	
	90V	04		0.025	0.040	
	180V	05		0.030	0.045	
S type (Holding use)	24V	01	DC side	0.010	0.025	
		02		0.010	0.030	
		03		0.020	0.035	
		04		0.025	0.040	
		05		0.030	0.045	
R type (For servo motors)	24V	01	DC side	0.020	0.035	
		03		0.020	0.050	
		05		0.020	0.060	

BXR LE Models (Holding use)

						Unit [s]
Voltage	Size	Switching	tar	ta		
24V	015	DC side	0.020	0.020		
	020		0.020	0.035		
	025		0.020	0.035		
	035		0.020	0.050		
	040		0.020	0.060		
	050	0.020	0.060			

BXR Models (Holding use)

						Unit [s]
Voltage	Size	Switching	tar	ta		
24V	06	DC side	0.02	0.05		
	08		0.02	0.08		
	10		0.05	0.11		
	12		0.03	0.12		
	14		0.03	0.12		
	16		0.10	0.22		

BXL Models (Braking use)

							Unit [s]
Voltage	Size	Switching	tar	tap	tp	ta	
24V	06	DC side	0.020	0.015	0.035	0.035	
	08		0.020	0.015	0.035	0.040	
	10		0.025	0.020	0.045	0.050	
	12		0.030	0.025	0.055	0.070	
	16		0.035	0.030	0.065	0.100	
45V 90V	06	AC side	0.110	0.035	0.145	0.035	
	08		0.110	0.040	0.150	0.040	
	10		0.150	0.060	0.210	0.050	
	12		0.180	0.095	0.275	0.070	
	16		0.180	0.100	0.280	0.100	

BXH Models (Holding use)

						Unit [s]
Voltage	Size	Switching	tar	ta		
24V 45V 90V	06	DC side	0.020	0.040		
	08		0.020	0.045		
	10		0.025	0.070		
	12		0.025	0.090		
	16		0.030	0.125		
45V 90V	06	AC side	0.070	0.040		
	08		0.080	0.045		
	10		0.090	0.070		
	12		0.120	0.090		
	16		0.140	0.125		

BXL-N Models (Braking use)


					Unit [s]
Voltage	Size	Switching	tar	ta	
24V 99V 171V	08-10N-002	DC side	0.050	0.030	
	08-10N-004		0.040	0.040	
	10-10N-008		0.050	0.050	
	10-10N-015		0.030	0.070	
	12-10N-022		0.060	0.080	
	12-10N-030		0.030	0.100	
	16-10N-040		0.070	0.100	
	16-10N-060		0.050	0.100	
	16-10N-080		0.030	0.100	

Control Circuits

45 V, 90 V, and 96 V Specifications for BXW, BXR, BXL, and BXH Models (Single-phase Half-wave Rectified)


AC-side Switching

This is the usual switching method. Connection is simple.

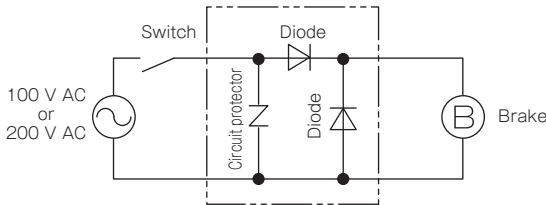


DC-side Switching

This method achieves even faster operational characteristics than AC-side switching.

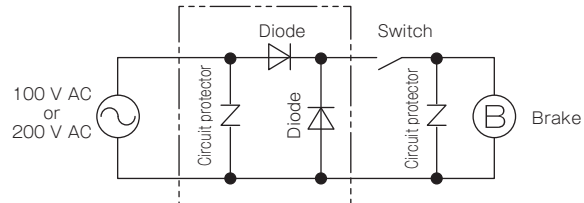

12 V and 24 V Specifications for BXW, BXR, BXL, and BXH Models (Single-phase Full-wave Rectified)

DC-side Switching

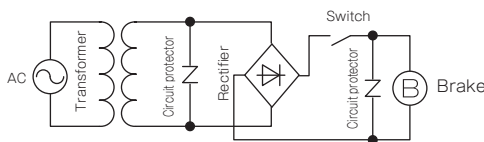

Circuit Protectors

If using a power supply that is not equipped with a circuit protector for DC switching, make sure to connect the recommended circuit protector device in parallel with the brake. However, with some circuit protectors, operation times may lengthen. In such cases, we recommend use of varistors.

Select varistors from the following table based on brake size and AC voltage before rectification.

Note that the 24 V specifications of BXL and BXH as well as all BXR models are supplied with varistors. See Included varistors for each model.

Brake size	Pre-rectification voltage [V]	Recommended varistor model
01 ~ 18	AC 30 or below	NVD07SCD082 or an equivalent
	Over AC 30 to AC 110 or below	NVD07SCD220 or an equivalent
	Over AC 110 to AC 220 or below	NVD07SCD470 or an equivalent
	Over AC 220 to AC 460 or below	NVD14SCD820 or an equivalent
20 ~ 25	AC 30 or below	NVD14SCD082 or an equivalent
	Over AC 30 to AC 110 or below	NVD14SCD220 or an equivalent
	Over AC 110 to AC 220 or below	NVD14SCD470 or an equivalent
	Over AC 220 to AC 460 or below	NVD14SCD820 or an equivalent

* NVD □SCD □ parts are manufactured by KOA Corporation.