


Double Sheet Detection System A100

Single probe Double Sheet Detection System for ferrous materials

- Single probe permanent-magnetic sensors
- Ferrous material 0.04 - 4 mm (0.0015 - 0.16 in) thickness (single sheet)
- Easy set-up by key operation or via control input
- LCD display for visualization of nominal / current values, operational / error message, key allocation
- Compact enclosures
 - Control unit for DIN-rail mounting, protection class IP00
 - Control unit for machine frame mounting, in protective enclosure, protection class IP54

THE ROLAND PLUS

- ▶ Teach-In
- ▶ Clear-Type-Display
- ▶ 3 Outputs



The manual contains detailed security instructions

These devices are NOT suitable for personnel safety applications. Never use these products as sensing devices for personnel protection. Their use as a safety device may create an unsafe condition which could lead to injury or death.



Application

When feeding sheets automatically, more than one sheet can be inadvertently fed into the processing machine. This can result in damage of the machine and tools, expensive repairs and production loss.

The single probe Double Sheet Detector A100 has been designed to prevent such events.

Function

The permanent magnetic sensors detect electronically magnetic flux changes caused by sheet interference. The magnetic flux changes are transformed into electrical signals by the sensors.

These electrical signals are processed by the control unit and sent to the machine controls for use as a switch signal.

The double sheet detector reacts to changes in the air gap between sensor and sheet surface in a similar way as to sheet thickness variations.

Therefore the detector can be used to monitor the presence or absence of layers, the correct position of sandwich materials, bimetal or hidden parts.


The sensor recognizes other sheets or metal parts beyond the first one. This permits applications in welding operations where e.g. the welding current is only released when the electrode holder contains the correct number of parts.

Sensor mounting

The sensor can be installed in any position: horizontally or vertically.

Recommendations:

- Flush mounting is recommended because this will eliminate wear on the face as well as deposits of chips and shavings.
- Recessed mounting is possible. It is important, however, that none of the above mentioned deposits accumulate in the recessed area (fill recessed area with non-ferrous materials).
- A spring loaded movable mounting arrangement is advantageous for thick plates because the sensor can be properly positioned to buckled sheets and reduce the possibility of an uncontrollable air gap developing.

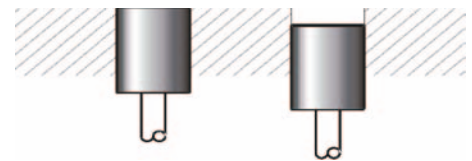

Flush and recessed sensor mounting

Attention!

To control curved sheets it may be advantageous to use a sensor of the next bigger size in order to overcome an undesired air gap. Opposite of the sensor, there must not be any ferromagnetic material closer than 1.5 times of the diameter of the sensor because it could distort the measurement.


The minimum measuring area should be equal to the sensor diameter. The sensor cable should not be placed next to power cables because of potential noise interference.

Magnetic attraction and air gap between sensor and 1st sheet:

- The magnetic attraction is proportional to the thickness of the sheet.
- When lifting the sensor from the sheet, this force must be overcome by mechanical, hydraulic or pneumatic devices.
- The magnetic force can be reduced through an air gap between sensor and sheet surface (recessed mounting, use of a roller bracket).
- If sensors exerting no force are required, these are available in the product series R1000 E20.


Technical Data

A100		
Supply voltage	24 V DC / 110 mA	
Power consumption	approx. 2.5 VA	
Fuse	375 mA slow-blow size 1206(SMD)	
Power / Switching indication	5 LEDs	
Display	LCD display, 16 characters each	
Ambient temperature	0° - 50°C (32° - 122°F) during operation	
Switching outputs 0-1-2 - Sheet	Opto coupler outputs, output sourcing (PNP)	
Temperature drift of switching point	± 0,02% / °C	
Switching capacity	max. 50 V, max 10 mA	
Measurement period	The minimum dwell time of the sheet on the sensor is 15 ms	
Enclosure	A100 / A100-S	For DIN-rail mounting (EN50022, BS5584) / Aluminum enclosure for machine frame mounting
Class of protection	A100 / A100-S	IP00 / IP54
Weight	A100 / A100-S	approx. 0.2 kg (0.44 lbs) / 0.6 kg (1.32 lbs)
Connections	A100 / A100-S	Terminal Block / Plug connection
Dimensions	A100 / A100-S	125.4 x 103 x 38 / 130 x 155 x 37mm (H x W x D)

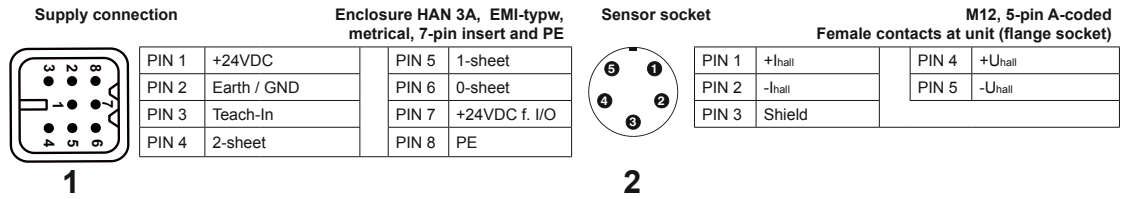


Dimensions

A100

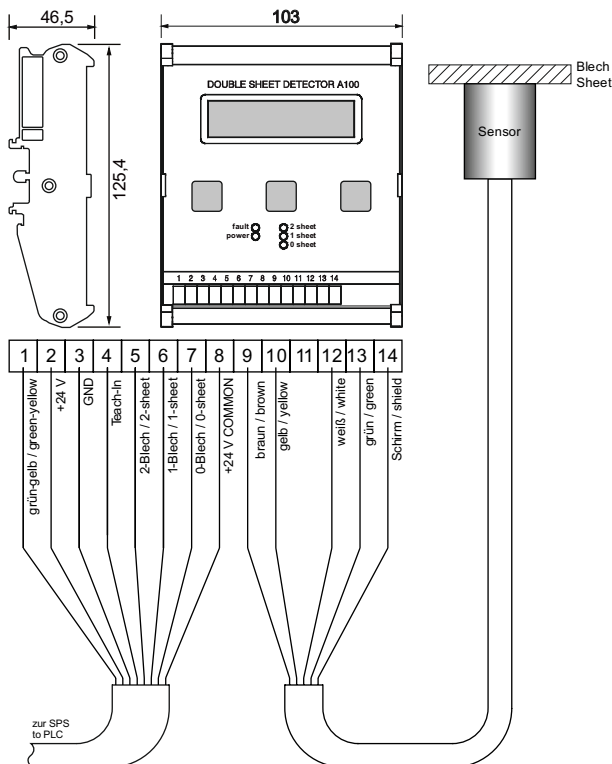


A100-S

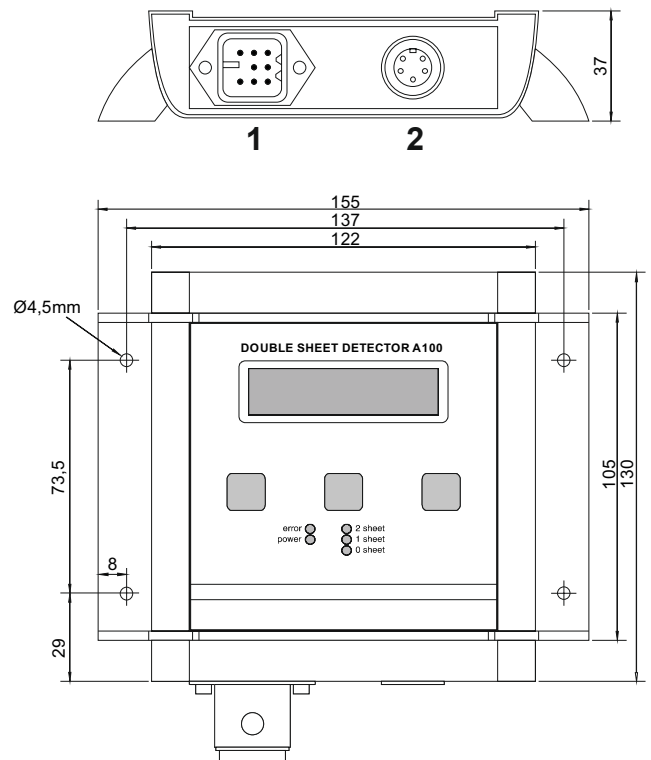

DOUBLE SHEET DETECTION SYSTEM A100

Sensors

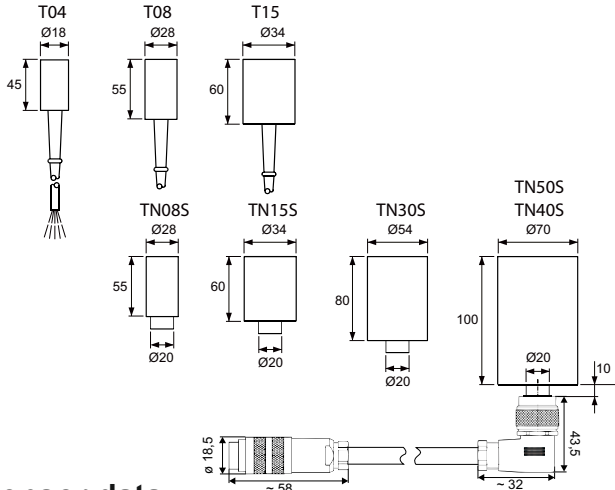

Sensor data

Sensor with fixed cable	T04	T08	T15				
Sensor with connecting socket		TN08S	TN15S	TN30S	TN40S	TN50S	
Single sheet thickness (mm)	Min. 0.04 Max. 0.40	0.08 0.80	0.10 1.50	0.20 3.00	0.30 4.00	0.50 4.50	
Min. adhesive force at axial stalling (mm)	1,5	8	15	35	55	80	
Diameter (mm)	18	28	34	54	70	70	
Length (mm)	45	55	60	80	100	100	
Sensor weight (kg) approx.	0.15	0.32	0.38	1.1	2.3	2.5	
Ambient temperature	0° - 50°C (32° - 122°F) during operation						
Class of protection	IP 65						

Abbreviated Set-up

For detailed instructions refer to the Operating Manual

Teach-In instructions

- Put a sheet with nominal thickness fully onto the sensor (see connection sketch).
- Press the SETUP key and then the NEW key, a new Teach-In procedure will then be performed.
- The green LED (1-sheet) lights up now, the measuring value is stored.
- Functional check:
If a second sheet is placed in front of the sensor (double sheet condition), the red LED (2-sheet) lights up. If both sheets are removed, the red LED (0-sheet) lights up.

ORDER INFORMATION

Control unit

Order data	Comment
A100	Control unit, for single probe sensors,
A100-S	operating voltage 24 V DC

Sensors


Order data	Comment
T04 T08 T15	With fixed cable for terminal wiring, standard cable length is 2 meters, lengths up to 20 meters upon order.
TN08S TN15S TN30S TN40S TN50S	With terminal socket for connecting the sensor cable. Order cable NKAS-xx or SNKAS-xx separately.

Cables (for pluggable sensors)

Order data	Comment
NKAS-W NKAS-G	Sensor cables, for connecting the TNxxS sensors, one end with cable socket, the other end with open wire ends for terminal connection at the control unit A100.
SNKAS-GW SNKAS-GG	Sensor cables, for connecting the TNxxS sensors to the A100-S.
Standard length of cables is 2m, length up to 20m upon order.	

Accessories (for A100-S)

Order data	Comment
S0003515	Harting connector, complete
S0003516	Plug for T-Sensors

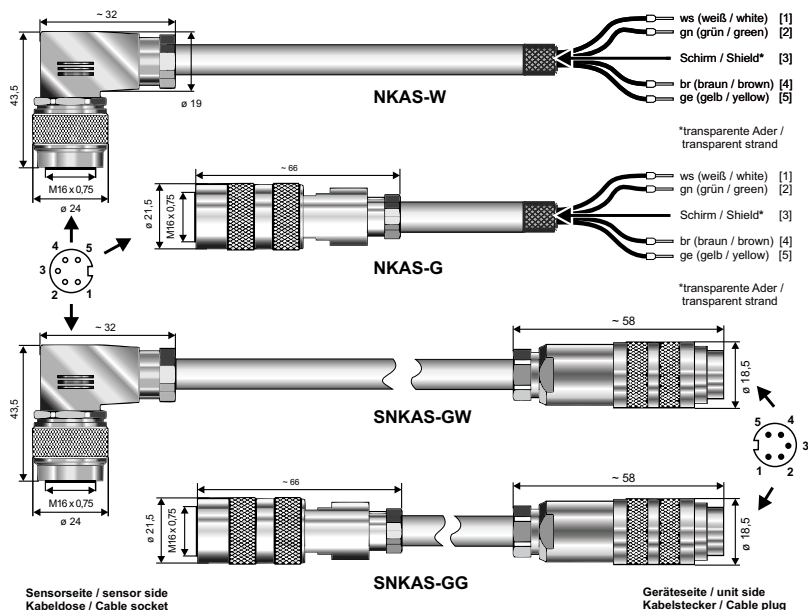

Sensorseite / sensor side
Kabeldose / Cable socket

Geräteseite / unit side
Kabelstecker / Cable plug

ROLAND ELECTRONIC GMBH

Otto-Maurer-Strasse 17
Phone: +49(0)7236-9392-0
info@roland-electronic.com

75210 Keltern / Germany
Fax: +49(0)7236-9392-33
www.roland-electronic.com

