

STANDARD CASTORS UP TO 450 KG



SERIES	standard castors solid rubber	standard castors elastic solid rubber	standard castors thermoplastic	standard castors polyurethane	standard castors elastic polyurethane	standard castors pneumatic tires
LOAD-CARRYING CAPACITY	up to 385 kg	up to 400 kg	up to 450 kg	up to 450 kg	up to 450 kg	up to 250 kg
WHEEL-Ø	80 mm - 280 mm	80 mm - 250 mm	80 mm - 250 mm	80 mm - 250 mm	80 mm - 250 mm	150 mm – 400 mm
MATERIAL/TIRES	standard solid rubber	elastic solid rubber	thermoplastic	polyurethane	elastic polyurethane	pneumatic tires
BEARING	plain bearing, castor bearing	ball bearing	plain bearing, ball bearing	plain bearing, ball bearing	ball bearing	plain bearing, roller bearing, ball bearing
PAGES	114	126	135	142	148	152



	standard puncture-proof castors	mini heavy-duty standard castor	standard castors IN	standard polypropylene castors	standard polyamide castors	heat-resistant castors
	up to 200 kg	up to 150 kg	up to 250 kg	up to 350 kg	up to 350 kg	up to 300 kg
	100 mm - 400 mm	35 mm - 50 mm	100 mm - 125 mm	80 mm - 250 mm	80 mm - 250 mm	80 mm - 200 mm
	foamed polyurethane	polyurethane	polyamide elastic-solid rubber polyurethane	polypropylene	polyamide	solid rubber, plastic, heat-resistant
	roller bearing, ball bearing	plain bearing, ball bearing	ball bearing	plain bearing, roller bearing, ball bearing	plain bearing, roller bearing, ball bearing	plain bearing
	154	158	160	164	170	176



***“Versatile, affordable,
optimally designed”***



Castors with **standard housing up to 450 kg**

Torwegge's standard housings are made from deep-drawn, galvanized steel sheet. The solid-riveted, double ball bearing in the slewing ring delivers an advantageous price-performance ratio when used for hand-held logistics applications. Castors in standard housing are commonly used by a variety of sectors in transport racks. They can carry a max. load of 1,200 kg at 4 km/h.

Housing description

- ☞ versions with mounting plate or bolt hole
- ☞ double-brake versions with pre-run or post-run
- ☞ all castors up to 200 mm in diameter have a directional lock recess
- ☞ fork head with double ball bearing
- ☞ single riveting
- ☞ seal with integrated ball spacer
- ☞ maintenance-free: lubricated with long-life grease
- ☞ can be retrofitted with foot protection

Temperature range

-25° C to + 90° C; heat-resistant range up to 250° C

areas of use // floors





Features:

- SGS wheels:
- wheel body made of steel sheet with roller bearing
- tread made of odorless standard solid rubber tires, black, approx. 80° – 85° shore A






Properties:


- runs quietly
- affordable
- absorbs vibration
- also available with grey tires
- (old designation: 522)

floors




wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
SGS-080-25-40-R12 Ident No.: 0013140	80	25	12	40	50
SGS-100-30-40-R12 Ident No.: 0013149	100	30	12	40	70
SGS-125-38-50-R15 Ident No.: 0013159	125	38	15	50	100
SGS-140-37-49-R20 Ident No.: 0013181	140	37	20	49	120
SGS-160-40-60-R20 Ident No.: 0013190	160	40	20	60	135
SGS-180-50-60-R20 Ident No.: 0013224	180	50	20	60	170
SGS-200-50-60-R20 Ident No.: 0013231	200	50	20	60	205
SGS-225-55-58-R20 Ident No.: 0013254	225	55	20	58	250
SGS-250-60-75-R25 Ident No.: 0013257	250	60	25	75	295
SGS-280-70-75-R25 Ident No.: 0013325	280	70	25	75	385



3-DSP (plate+brake +directional lock)




foot protection

Suitable castors can be found on pages 115, 116


Matching accessories can be found on page 432

solid rubber // standard housing IS, IL // up to 385 kg

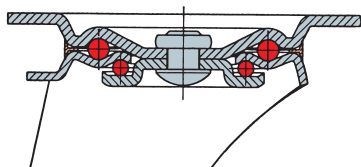

Features:


- castors IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-SGS-080-R-3 ID: 0029261	L-IS-SGS-080-R-3-DSN ID: 0029266	B-IS-SGS-080-R ID: 0029271	80	25	100	36	105 x 80	80 x 60	9	50
L-IS-SGS-100-R-3 ID: 0029262	L-IS-SGS-100-R-3-DSN ID: 0029267	B-IS-SGS-100-R ID: 0029272	100	30	125	38	105 x 80	80 x 60	9	70
L-IS-SGS-100-R-3-GP ID: 0033570	L-IS-SGS-100-R-3-DSN-GP ID: 0040514	B-IS-SGS-100-R-GP ID: 0032436	100	30	128	46	135 x 110	105 x 80	11	70
L-IS-SGS-125-R-3 ID: 0029263	L-IS-SGS-125-R-3-DSN ID: 0029268	B-IS-SGS-125-R ID: 0029273	125	38	155	38	105 x 80	80 x 60	9	100
L-IS-SGS-125-R-3-GP ID: 0035811	L-IS-SGS-125-R-3-DSN-GP ID: 0040070	B-IS-SGS-125-R-GP ID: 0040071	125	38	155	48	135 x 110	105 x 80	11	100
L-IS-SGS-140-R-3 ID: 0029818	L-IS-SGS-140-R-3-DSV ID: 0029819	B-IS-SGS-140-R ID: 0029820	140	37	173	46	115 x 85	80 x 60	9	120
L-IS-SGS-160-R-3 ID: 0029264	L-IS-SGS-160-R-3-DSN ID: 0029269	B-IS-SGS-160-R ID: 0029274	160	40	190	52	135 x 110	105 x 80	11	135
L-IS-SGS-180-R-3 ID: 0029821	L-IS-SGS-180-R-3-DSN ID: 0029822	B-IS-SGS-180-R ID: 0029823	180	50	210	53	135 x 110	105 x 80	11	170
L-IS-SGS-200-R-3 ID: 0029265	L-IS-SGS-200-R-3-DSN ID: 0029270	B-IS-SGS-200-R ID: 0029275	200	50	235	54	135 x 110	105 x 80	11	205
L-IS-SGS-225-R-3 ID: 0013442	L-IS-SGS-225-R-3-DSV ID: 0013443	B-IS-SGS-225-R ID: 0013733	225	55	250	53	135 x 110	105 x 80	11	250
L-IS-SGS-250-R-3 ID: 0034347	L-IS-SGS-250-R-3-DSV ID: 0013455	B-IS-SGS-250-R ID: 0013739	250	60	290	66	135 x 110	105 x 80	11	275
L-IS-SGS-280-R-3 ID: 0013462	L-IS-SGS-280-R-3-DSV ID: 0013463	B-IS-SGS-280-R ID: 0013743	280	70	320	72	200 x 160	160 x 120	14	385

Matching accessories can be found on page 432




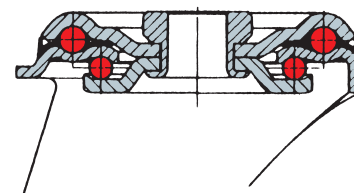


solid rubber // standard housing IS, IL // up to 205 kg




Features:


- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IS-SGS-080-R-1 ID: 0030271	L-IS-SGS-080-R-1-DSN ID: 0030276	80	25	99	36	12	50
L-IS-SGS-100-R-1 ID: 0030272	L-IS-SGS-100-R-1-DSN ID: 0030277	100	30	124	38	12	70
L-IS-SGS-125-R-1 ID: 0030273	L-IS-SGS-125-R-1-DSN ID: 0030278	125	38	154	38	12	100
L-IS-SGS-160-R-1 ID: 0030274	L-IS-SGS-160-R-1-DSN ID: 0030279	160	40	190	52	12	135
L-IS-SGS-200-R-1 ID: 0030275	L-IS-SGS-200-R-1-DSN ID: 0030280	200	50	235	54	12	205



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors



Features:

- SGK wheel series:
- wheel body made of plastic with roller bearing
- tread made of odorless standard solid rubber tires, black, approx. 80° – 85° shore A

Properties:

- runs quietly
- affordable
- absorbs vibration
- also available with grey tread
- (old designation: 522/.../KU)




"Wide variety"

wheels	wheel ø mm	wheel width mm	axle hole ø mm	hub length mm	load-carrying capacity kg
SGK-080-25-40-R12 Ident No.: 0013144	80	25	12	40	50
SGK-100-30-40-R12 Ident No.: 0013154	100	30	12	40	70
SGK-125-38-50-R15 Ident No.: 0013166	125	38	15	50	100
SGK-160-40-60-R20 Ident No.: 0013195	160	40	20	60	135
SGK-180-45-60-R20 Ident No.: 0013226	180	45	20	60	180
SGK-200-50-60-R20 Ident No.: 0013239	200	50	20	60	205
SGK-250-60-75-R25 Ident No.: 0013265	250	60	25	75	295

Suitable castors can be found on pages 118, 119

Matching accessories can be found on page 432

solid rubber // standard housing IS, IL // up to 295 kg

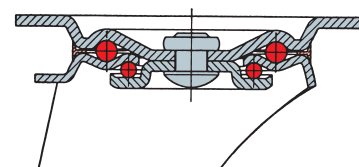

Features:


- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-SGK-080-R-3 ID: 0029276	L-IS-SGK-080-R-3-DSN ID: 0029281	B-IS-SGK-080-R ID: 0029286	80	25	100	36	105 x 80	80 x 60	9	50
L-IS-SGK-100-R-3 ID: 0029277	L-IS-SGK-100-R-3-DSN ID: 0029282	B-IS-SGK-100-R ID: 0029287	100	30	125	38	105 x 80	80 x 60	9	70
L-IS-SGK-100-R-3-GP ID: 0040562	L-IS-SGK-100-R-3-DSN-GP ID: 0040563	B-IS-SGK-100-R-GP ID: 0040564	100	30	128	38	135 x 105	105 x 80	11	70
L-IS-SGK-125-R-3 ID: 0029278	L-IS-SGK-125-R-3-DSN ID: 0029283	B-IS-SGK-125-R ID: 0029288	125	38	155	38	105 x 80	80 x 60	9	100
L-IS-SGK-125-R-3-GP ID: 0040565	L-IS-SGK-125-R-3-DSN-GP ID: 0040566	B-IS-SGK-125-R-GP ID: 0040567	125	83	155	48	135 x 105	105 x 80	11	100
L-IS-SGK-160-R-3 ID: 0029279	L-IS-SGK-160-R-3-DSN ID: 0029284	B-IS-SGK-160-R ID: 0029289	160	40	190	52	135 x 110	105 x 80	11	135
L-IS-SGK-180-R-3 ID: 0031951	L-IS-SGK-180-R-3-DSN ID: 0037767	B-IS-SGK-180-R ID: 0036018	180	50	210	53	135 x 110	105 x 80	11	170
L-IS-SGK-200-R-3 ID: 0029280	L-IS-SGK-200-R-3-DSN ID: 0029285	B-IS-SGK-200-R ID: 0029290	200	50	235	54	135 x 110	105 x 80	11	205
L-IS-SGK-250-R-3 ID: 0029734	L-IS-SGK-250-R-3-DSV ID: 0029735	B-IS-SGK-250-R ID: 0029736	250	60	290	66	135 x 114	105 x 80	11	295

Matching accessories can be found on page 432

solid rubber // standard housing IS, IL // up to 295 kg

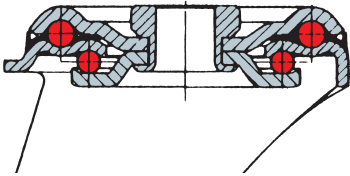

Features:

- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IS-SGK-080-R-1 ID: 0030281	L-IS-SGK-080-R-1-DSN ID: 0030286	80	25	99	36	12	50
L-IS-SGK-100-R-1 ID: 0030282	L-IS-SGK-100-R-1-DSN ID: 0030287	100	30	124	38	12	70
L-IS-SGK-125-R-1 ID: 0030283	L-IS-SGK-125-R-1-DSN ID: 0030288	125	38	154	38	12	100
L-IS-SGK-160-R-1 ID: 0030284	L-IS-SGK-160-R-1-DSN ID: 0030289	160	40	190	52	12	135
L-IS-SGK-200-R-1 ID: 0030285	L-IS-SGK-200-R-1-DSN ID: 0030290	200	50	235	54	12	205

Matching accessories can be found on page 432



Features:

- SGS-grey wheel series:
- wheel body made of steel sheet with roller bearing
- tread made of odorless standard solid rubber tires, grey, approx. 80° – 85° shore A






Properties:

- non-marking
- runs quietly
- affordable
- absorbs vibration
- (old designation: 522/.../BG)

floors




wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
SGS-080-25-40-R12-grey Ident No.: 0013141	80	25	12	40	50
SGS-100-30-40-R12-grey Ident No.: 0013150	100	30	12	40	70
SGS-125-38-50-R15-grey Ident No.: 0013161	125	38	15	50	100
SGS-140-38-48-R20-grey Ident No.: 0013182	140	38	20	48	120
SGS-160-40-60-R20-grey Ident No.: 0013192	160	40	20	60	135
SGS-180-48-58-R20-grey Ident No.: 0013225	180	48	20	58	180
SGS-200-50-60-R20-grey Ident No.: 0013236	200	50	20	60	200
SGS-250-60-75-R25-grey Ident No.: 0013262	250	60	25	75	295

Suitable castors can be found on pages 121, 122

Matching accessories can be found on page 432

solid rubber // standard housing IS, IL // up to 295 kg

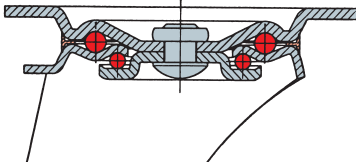

Features:

- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-SGS-080-R-3-grey ID: 0029346	L-IS-SGS-080-R-3-DSN-grey ID: 0029351	B-IS-SGS-080-R-grey ID: 0029356	80	25	100	36	105 x 80	80 x 60	9	50
L-IS-SGS-100-R-3-grey ID: 0029347	L-IS-SGS-100-R-3-DSN-grey ID: 0029352	B-IS-SGS-100-R-grey ID: 0029357	100	30	125	38	105 x 80	80 x 60	9	70
L-IS-SGS-125-R-3-grey ID: 0029348	L-IS-SGS-125-R-3-DSN-grey ID: 0029353	B-IS-SGS-125-R-grey ID: 0029358	125	38	155	38	105 x 80	80 x 60	9	100
L-IS-SGS-140-R-3-grey ID: 0031314	L-IS-SGS-140-R-3-DSV-grey ID: 0035515	B-IS-SGS-140-R-grey ID: 0032656	140	37	173	46	115 x 85	80 x 60	9	120
L-IS-SGS-160-R-3-grey ID: 0029349	L-IS-SGS-160-R-3-DSN-grey ID: 0029354	B-IS-SGS-160-R-grey ID: 0029359	160	40	190	52	135 x 110	105 x 80	11	135
L-IS-SGS-180-R-3-grey ID: 0031730	L-IS-SGS-180-R-3-DSN-grey ID: 0031742	B-IS-SGS-180-R-grey ID: 0031767	180	50	210	53	135 x 110	105 x 80	11	170
L-IS-SGS-200-R-3-grey ID: 0029350	L-IS-SGS-200-R-3-DSN-grey ID: 0029355	B-IS-SGS-200-R-grey ID: 0029360	200	50	235	54	135 x 110	105 x 80	11	205
L-IS-SGS-250-R-3-grey ID: 0013445	L-IS-SGS-250-R-3-DSV-grey ID: 0029837	B-IS-SGS-250-R-grey ID: 0013735	250	60	290	66	135 x 110	105 x 80	11	295




-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432




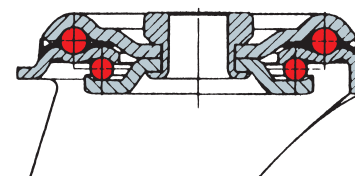


solid rubber // standard housing IS, IL // up to 205 kg



Features:

- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IS-SGS-080-R-1-grey ID: 0030291	L-IS-SGS-080-R-1-DSN-grey ID: 0030296	80	30	99	36	12	50
L-IS-SGS-100-R-1-grey ID: 0030292	L-IS-SGS-100-R-1-DSN-grey ID: 0030297	100	30	124	38	12	70
L-IS-SGS-125-R-1-grey ID: 0030293	L-IS-SGS-125-R-1-DSN-grey ID: 0030298	125	38	154	38	12	100
L-IS-SGS-160-R-1-grey ID: 0030294	L-IS-SGS-160-R-1-DSN-grey ID: 0030299	160	40	190	52	12	135
L-IS-SGS-200-R-1-grey ID: 0030295	L-IS-SGS-200-R-1-DSN-grey ID: 0030300	200	50	235	54	12	205



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors








Features:

- SGK-grey wheel series:
- wheel body made of plastic with roller bearing
- tread made of odorless standard solid rubber tires, grey, approx. 80° – 85° shore A

Properties:

- non-marking
- runs quietly
- affordable
- absorbs vibration
- (old designation: 522/.../KUBG)




wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
SGK-080-25-40-R12-grey Ident No.: 0013145	80	25	12	40	50
SGK-100-30-40-R12-grey Ident No.: 0013155	100	30	12	40	70
SGK-125-38-50-R15-grey Ident No.: 0013168	125	38	15	50	100
SGK-160-40-60-R20-grey Ident No.: 0013198	160	40	20	60	135
SGK-200-50-60-R20-grey Ident No.: 0013241	200	50	20	60	200
SGK-250-60-75-R25-grey Ident No.: 0013267	250	60	25	75	295

Suitable castors can be found on pages 124, 125

Matching accessories can be found on page 432

solid rubber // standard housing IS, IL // up to 205 kg

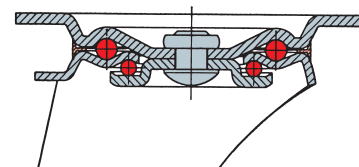

Features:


- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-SGK-080-R-3-grey ID: 0029361	L-IS-SGK-080-R-3-DSN-grey ID: 0029366	B-IS-SGK-080-R-grey ID: 0029371	80	25	100	36	105 x 80	80 x 60	9	50
L-IS-SGK-100-R-3-grey ID: 0029362	L-IS-SGK-100-R-3-DSN-grey ID: 0029367	B-IS-SGK-100-R-grey ID: 0029372	100	30	125	38	105 x 80	80 x 60	9	70
L-IS-SGK-125-R-3-grey ID: 0029363	L-IS-SGK-125-R-3-DSN-grey ID: 0029368	B-IS-SGK-125-R-grey ID: 0029373	125	38	155	38	105 x 80	80 x 60	9	100
L-IS-SGK-160-R-3-grey ID: 0029364	L-IS-SGK-160-R-3-DSN-grey ID: 0029369	B-IS-SGK-160-R-grey ID: 0029374	160	40	190	52	135 x 110	105 x 80	11	135
L-IS-SGK-200-R-3-grey ID: 0029365	L-IS-SGK-200-R-3-DSN-grey ID: 0029370	B-IS-SGK-200-R-grey ID: 0029375	200	50	235	54	135 x 110	105 x 80	11	205

Matching accessories can be found on page 432

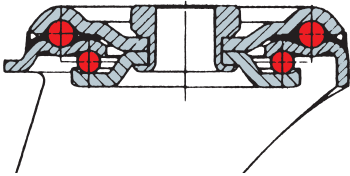





solid rubber // standard housing IS, IL // up to 205 kg



Features:

- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IS-SGK-080-R-1-grey ID: 0030301	L-IS-SGK-080-R-1-DSN-grey ID: 0030306	80	25	99	36	12	50
L-IS-SGK-100-R-1-grey ID: 0030302	L-IS-SGK-100-R-1-DSN-grey ID: 0030307	100	30	124	38	12	70
L-IS-SGK-125-R-1-grey ID: 0030303	L-IS-SGK-125-R-1-DSN-grey ID: 0030308	125	38	154	38	12	100
L-IS-SGK-160-R-1-grey ID: 0030304	L-IS-SGK-160-R-1-DSN-grey ID: 0030309	160	40	190	52	12	135
L-IS-SGK-200-R-1-grey ID: 0030305	L-IS-SGK-200-R-1-DSN-grey ID: 0030310	200	50	235	54	12	205



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”

Matching accessories can be found on page 432



Features:

- EGK wheel series:
- wheel body made of plastic with roller bearing
- tread made of elastic solid rubber, approx 65° shore A
- blue wheel color

Properties:






- runs quietly
- non-marking
- absorbs vibration
- also available with grey wheels
- (old designation: ER)

floors



“Pleasant driving property”


wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
EGK-080-35-40-R12 Ident No.: 0028757	80	35	12	40	100
EGK-100-36-40-R12 Ident No.: 0028013	100	36	12	40	125
EGK-125-36-50-R15 Ident No.: 0028014	125	36	15	50	200
EGK-160-48-60-R20 Ident No.: 0028758	160	48	20	60	300
EGK-200-48-60-R20 Ident No.: 0028759	200	48	20	60	350

Suitable castors can be found on pages 127, 128

Matching accessories can be found on page 432

elastic rubber // standard housing IS, IL // up to 350 kg

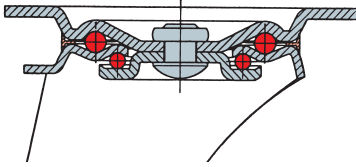


Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)




swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-EGK-080-R-3 ID: 0029181	L-IL-EGK-080-R-3-DSN ID: 0029186	B-IL-EGK-080-R ID: 0029641	80	35	100	36	105 x 80	80 x 60	9	100
L-IL-EGK-100-R-3 ID: 0029182	L-IL-EGK-100-R-3-DSN ID: 0029187	B-IL-EGK-100-R ID: 0029642	100	36	125	36	105 x 80	80 x 60	9	125
L-IK-EGK-100-R-3-GP ID: 0039073	L-IK-EGK-100-R-3-DSN-GP ID: 0039074	B-IK-EGK-100-R-GP ID: 0039075	100	36	128	46	135 x 110	105 x 80	11	200
L-IL-EGK-125-R-3 ID: 0029183	L-IL-EGK-125-R-3-DSN ID: 0029188	B-IL-EGK-125-R ID: 0029643	125	36	155	36	105 x 80	80 x 60	9	200
L-IK-EGK-125-R-3-GP ID: 0039952	L-IK-EGK-125-R-3-DSN-GP ID: 0039951	B-IK-EGK-125-R-GP ID: 0035488	125	36	155	48	135 x 110	105 x 80	11	200
L-IL-EGK-160-R-3 ID: 0029184	L-IL-EGK-160-R-3-DSN ID: 0029189	B-IL-EGK-160-R ID: 0029644	160	48	190	52	135 x 110	105 x 80	11	300
L-IL-EGK-200-R-3 ID: 0029185	L-IL-EGK-200-R-3-DSN ID: 0029190	B-IL-EGK-200-R ID: 0029645	200	48	235	54	135 x 110	105 x 80	11	350



foot protection




-1 (bolt hole)



1-DSN (bolt hole+ double brake)


Matching accessories can be found on page 432


elastic rubber // standard housing IS, IL // up to 350 kg

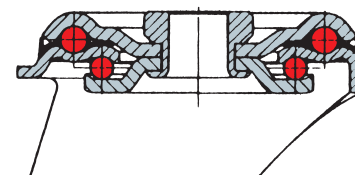








Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)


 **"Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm"**



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-EGK-080-R-1 ID: 0029646	L-IL-EGK-080-R-1-DSN ID: 0029651	80	35	103	36	12	100
L-IL-EGK-100-R-1 ID: 0029647	L-IL-EGK-100-R-1-DSN ID: 0029652	100	36	125	38	12	125
L-IL-EGK-125-R-1 ID: 0029648	L-IL-EGK-125-R-1-DSN ID: 0029653	125	36	155	38	12	200
L-IL-EGK-160-R-1 ID: 0029649	L-IL-EGK-160-R-1-DSN ID: 0029654	160	48	190	52	12	300
L-IL-EGK-200-R-1 ID: 0029650	L-IL-EGK-200-R-1-DSN ID: 0029655	200	48	235	53	12	350



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors



Features:

- EGA wheel series:
- die-cast aluminum wheel body with ball bearing
- tread surface made of elastic solid rubber, black, approx. 65° shore A

Properties:

- high elasticity with low rolling resistance
- runs quietly
- sturdy and shock-resistant
- absorbs vibration
- also available with grey wheels
- (old designation: F3)




"Pleasant driving property"

wheels	wheel ø mm	wheel width mm	axle hole ø mm	hub length mm	load-carrying capacity kg
EGA-080-38-40-K12 Ident No.: 0017789	80	38	12	40	120
EGA-100-40-40-K12 Ident No.: 0038446	100	40	12	40	180
EGA-125-40-50-K20 Ident No.: 0038447	125	40	20	50	200
EGA-160-50-60-K20 Ident No.: 0038448	160	50	20	60	300
EGA-200-50-60-K20 Ident No.: 0037761	200	50	20	60	400
EGA-250-50-60-K25 Ident No.: 0037797	250	50	25	60	500

Suitable castors can be found on pages 130, 131, 160, 187, 203

Matching accessories can be found on page 432

elastic rubber // standard housing IS, IL // up to 400 kg



Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-EGA-080-K-3 ID: 0029656	L-IL-EGA-080-K-3-DSN ID: 0029681	B-IL-EGA-080-K ID: 0029687	80	38	100	36	105 x 80	80 x 60	9	120
L-IL-EGA-100-K-3 ID: 0029657	L-IL-EGA-100-K-3-DSN ID: 0029682	B-IL-EGA-100-K ID: 0029688	100	40	125	36	105 x 80	80 x 60	9	180
L-IK-EGA-100-K-3-GP ID: 0016538	L-IK-EGA-100-K-3-DSN-GP ID: 0040512	B-IK-EGA-100-K-GP ID: 0016465	100	40	128	46	135 x 110	105 x 80	11	180
L-IL-EGA-125-K-3 ID: 0029658	L-IL-EGA-125-K-3-DSN ID: 0029683	B-IL-EGA-125-K ID: 0029689	125	40	155	36	105 x 80	80 x 60	9	200
L-IK-EGA-125-K-3-GP ID: 0036067	L-IK-EGA-125-K-3-DSN-GP ID: 0036069	B-IK-EGA-125-K-GP ID: 0040513	125	40	155	48	135 x 110	105 x 80	11	300
L-IL-EGA-160-K-3 ID: 0029678	L-IL-EGA-160-K-3-DSN ID: 0029684	B-IL-EGA-160-K ID: 0029690	160	50	190	52	135 x 110	105 x 80	11	300
L-IL-EGA-200-K-3 ID: 0029679	L-IL-EGA-200-K-3-DSN ID: 0029685	B-IL-EGA-200-K ID: 0029691	200	50	235	54	135 x 110	105 x 80	11	400
L-IS-EGA-250-K-3 ID: 0029680	L-IS-EGA-250-K-3-DSV ID: 0029686	B-IS-EGA-250-K ID: 0029692	250	50	290	66	135 x 110	105 x 80	11	400

Matching accessories can be found on page 432







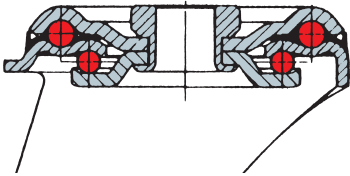elastic rubber // standard housing IS, IL // up to 300 kg



Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-EGA-080-K-1 ID: 0029693	L-IL-EGA-080-K-1-DSN ID: 0029698	80	38	103	36	12	120
L-IL-EGA-100-K-1 ID: 0029694	L-IL-EGA-100-K-1-DSN ID: 0029699	100	40	125	38	12	180
L-IL-EGA-125-K-1 ID: 0029695	L-IL-EGA-125-K-1-DSN ID: 0029700	125	40	155	38	12	200
L-IL-EGA-160-K-1 ID: 0029696	L-IL-EGA-160-K-1-DSN ID: 0029701	160	50	190	52	12	300
L-IL-EGA-200-K-1 ID: 0029697	L-IL-EGA-200-K-1-DSN ID: 0029702	200	50	235	54	12	400



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”

Matching accessories can be found on page 432



Features:

- EGA-grey wheel series:
- die-cast aluminum wheel body with ball bearing
- tread made of elastic solid rubber, grey, approx. 65° shore A

Properties:






- non-marking
- high elasticity with low rolling resistance
- runs quietly
- sturdy and shock-resistant
- absorbs vibration
- (old designation: F3/BG)

floors



“Pleasant driving property and non-marking”


wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
EGA-100-40-40-K12-grey Ident No.: 0031039	100	40	12	40	180
EGA-125-40-50-K20-grey Ident No.: 0016385	125	40	20	50	200
EGA-160-50-60-K20-grey Ident No.: 0027771	160	50	20	60	300
EGA-200-50-60-K20-grey Ident No.: 0016399	200	50	20	60	400
EGA-250-50-60-K25-grey Ident No.: 0029675	250	50	25	60	500

Suitable castors can be found on pages 133, 134

Matching accessories can be found on page 432

elastic rubber // standard housing IS, IL // up to 400 kg

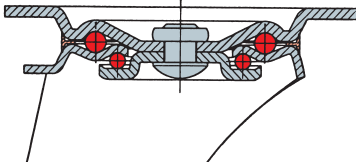

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-EGA-100-K-3-grey ID: 0040483	L-IL-EGA-100-K-3-DSN-grey ID: 0040484	B-IL-EGA-100-K-grey ID: 0040485	100	40	125	36	105 x 80	80 x 60	9	180
L-IL-EGA-125-K-3-grey ID: 0029745	L-IL-EGA-125-K-3-DSN-grey ID: 0029748	B-IL-EGA-125-K-grey ID: 0029751	125	40	155	36	105 x 80	80 x 60	9	200
L-IL-EGA-160-K-3-grey ID: 0029746	L-IL-EGA-160-K-3-DSN-grey ID: 0029749	B-IL-EGA-160-K-grey ID: 0029752	160	50	190	52	135 x 110	105 x 80	11	300
L-IL-EGA-200-K-3-grey ID: 0029747	L-IL-EGA-200-K-3-DSN-grey ID: 0029750	B-IL-EGA-200-K-grey ID: 0029753	200	50	235	54	135 x 110	105 x 80	11	400
L-IS-EGA-250-K-3-grey ID: 0040486	L-IS-EGA-250-K-3-DSV-grey ID: 0040487	B-IS-EGA-250-K-grey ID: 0040488	250	50	290	66	135 x 110	105 x 80	11	400




-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432

elastic rubber // standard housing IS, IL // up to 400 kg









Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-EGA-125-K-1-grey ID: 0030518	L-IL-EGA-125-K-1-DSN-grey ID: 0030521	125	40	155	38	12	200
L-IL-EGA-160-K-1-grey ID: 0030519	L-IL-EGA-160-K-1-DSN-grey ID: 0030522	160	50	190	52	12	300
L-IL-EGA-200-K-1-grey ID: 0030520	L-IL-EGA-200-K-1-DSN-grey ID: 0030523	200	50	235	54	12	400



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors



Features:






- TPBK wheel series:
- polypropylene wheel body with ball bearing
- temperature resistance: -20° C to 60° C
- grey thermoplastic rubber tread, approx. 85° shore A
- with thread guards to protect the ball bearing from dust and dirt

Properties:

- runs quietly
- non-marking
- low rolling resistance
- (old designation: KO/TPK)




"This smooth-running series is innovative and inexpensive"

wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
TPBK-080-30-40-K08 Ident No.: 0021572	80	30	8	40	80
TPBK-100-30-40-K08 Ident No.: 0021573	100	30	8	40	90
TPBK-125-35-50-K08 Ident No.: 0028530	125	35	8	50	110
TPBK-160-40-60-K12 Ident No.: 0026621	160	40	12	60	180
TPBK-200-47-60-K12 Ident No.: 0026622	200	47	12	60	220

Suitable castors can be found on pages 136, 137

Matching accessories can be found on page 432

thermoplastic // standard housing IS, IL // up to 220 kg

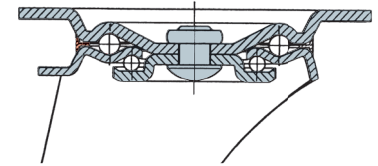

Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-TPBK-080-K-3 ID: 0029490	L-IL-TPBK-080-K-3-DSN ID: 0029495	B-IL-TPBK-080-K ID: 0029500	80	30	100	36	105 x 80	80 x 60	9	80
L-IL-TPBK-100-K-3 ID: 0029491	L-IL-TPBK-100-K-3-DSN ID: 0029496	B-IL-TPBK-100-K ID: 0029501	100	30	125	36	105 x 80	80 x 60	9	90
L-IL-TPBK-125-K-3 ID: 0029492	L-IL-TPBK-125-K-3-DSN ID: 0029497	B-IL-TPBK-125-K ID: 0029502	125	35	155	36	105 x 80	80 x 60	9	110
L-IL-TPBK-160-K-3 ID: 0029493	L-IL-TPBK-160-K-3-DSN ID: 0029498	B-IL-TPBK-160-K ID: 0029503	160	40	190	52	135 x 110	105 x 80	11	180
L-IL-TPBK-200-K-3 ID: 0029494	L-IL-TPBK-200-K-3-DSN ID: 0029499	B-IL-TPBK-200-K ID: 0029504	200	47	235	54	135 x 110	105 x 80	11	220

Matching accessories can be found on page 432

thermoplastic // standard housing IS, IL // up to 220 kg

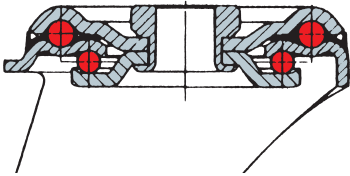

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-TPBK-080-K-1 ID: 0029505	L-IL-TPBK-080-K-1-DSN ID: 0029510	80	30	100	36	12	80
L-IL-TPBK-100-K-1 ID: 0029506	L-IL-TPBK-100-K-1-DSN ID: 0029511	100	30	125	38	12	90
L-IL-TPBK-125-K-1 ID: 0029507	L-IL-TPBK-125-K-1-DSN ID: 0029512	125	35	155	38	12	110
L-IL-TPBK-160-K-1 ID: 0029508	L-IL-TPBK-160-K-1-DSN ID: 0029513	160	40	190	52	12	180
L-IL-TPBK-200-K-1 ID: 0029509	L-IL-TPBK-200-K-1-DSN ID: 0029514	200	47	235	54	12	220



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”

Matching accessories can be found on page 432



Features:

- TPKH wheel series:
- polypropylene wheel body with 2 ball bearings per wheel
- tread made of thermoplastic rubber, grey, approx. 85° shore A

Properties:

- runs quietly, non-marking
- higher load-carrying capacity than rubber
- minimal rolling resistance, shock-resistant
- (old designation: THKS)

floors



 **"Heavy-duty design with two ball bearings"**

wheels



wheel ø
mm



wheel width
mm



axle hole ø
mm



hub length
mm




load-carrying
capacity kg

TPKH-080-35-40-K12 Ident No.: 0014307	80	35	12	40	120
TPKH-100-35-40-K12 Ident No.: 0014308	100	35	12	40	150
TPKH-125-40-50-K15 Ident No.: 0014309	125	40	15	50	200
TPKH-150-45-60-K20 Ident No.: 0014310	150	45	20	60	260
TPKH-160-45-60-K20 Ident No.: 0014311	160	45	20	60	260
TPKH-200-50-60-K20 Ident No.: 0014312	200	50	20	60	350
TPKH-250-60-75-K25 Ident No.: 0016967	250	60	25	75	450

Suitable castors can be found on pages 139, 140, 189

Matching accessories can be found on page 432

thermoplastic // standard housing IS, IL // up to 450 kg

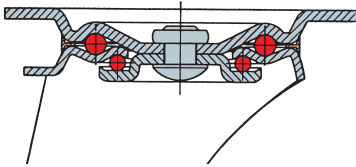

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-TPKH-080-K-3 ID: 0029410	L-IL-TPKH-080-K-3-DSN ID: 0029416	B-IL-TPKH-080-K ID: 0029422	80	35	100	36	105 x 80	80 x 60	9	120
L-IL-TPKH-100-K-3 ID: 0029411	L-IL-TPKH-100-K-3-DSN ID: 0029417	B-IL-TPKH-100-K ID: 0029423	100	35	125	36	105 x 80	80 x 60	9	150
L-IK-TPKH-100-K-3-GP ID: 0015807	L-IK-TPKH-100-K-3-DSN-GP ID: 0040581	B-IK-TPKH-100-K-GP ID: 0040582	100	35	128	46	135 x 110	105 x 80	11	150
L-IL-TPKH-125-K-3 ID: 0029412	L-IL-TPKH-125-K-3-DSN ID: 0029418	B-IL-TPKH-125-K ID: 0029424	125	40	155	36	105 x 80	80 x 60	9	200
L-IK-TPKH-125-K-3-GP ID: 0015809	L-IK-TPKH-125-K-3-DSN-GP ID: 0015816	B-IK-TPKH-125-K-GP ID: 0015823	125	40	155	48	135 x 110	105 x 80	11	200
L-IL-TPKH-150-K-3 ID: 0034624	L-IL-TPKH-150-K-3-DSN ID: 0031761	B-IL-TPKH-150-K ID: 0033657	150	45	185	52	135 x 110	105 x 80	11	260
L-IL-TPKH-160-K-3 ID: 0029413	L-IL-TPKH-160-K-3-DSN ID: 0029419	B-IL-TPKH-160-K ID: 0029425	160	45	190	52	135 x 110	105 x 80	11	260
L-IL-TPKH-200-K-3 ID: 0029414	L-IL-TPKH-200-K-3-DSN ID: 0029420	B-IL-TPKH-200-K ID: 0029426	200	50	235	54	135 x 110	105 x 80	11	350
L-IS-TPKH-250-K-3 ID: 0029415	L-IL-TPKH-250-K-3-DSV ID: 0029421	B-IL-TPKH-250-K ID: 0029427	250	60	290	66	135 x 110	105 x 80	11	400
L-IP-TPKH-250-K-3-GP ID: 0040583	L-IP-TPKH-250-K-3-DSV-GP ID: 0040584	B-IP-TPKH-250-K-GP ID: 0040585	250	60	290	70	175 x 1475	140 x 140	15	450



-1 (bolt hole)




foot protection



1-DSN (bolt hole+ double brake)

thermoplastic // standard housing IS, IL // up to 450 kg

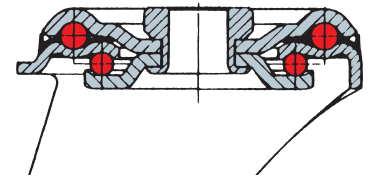







Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)




"Bolt hole 12 or 17 mm is optionally available for wheel diameters 160 and 200 mm"



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-TPKH-080-K-1 ID: 0029428	L-IL-TPKH-080-K-1-DSN ID: 0029433	80	35	100	36	12	120
L-IL-TPKH-100-K-1 ID: 0029429	L-IL-TPKH-100-K-1-DSN ID: 0029434	100	35	125	38	12	150
L-IL-TPKH-125-K-1 ID: 0029430	L-IL-TPKH-125-K-1-DSN ID: 0029435	125	40	155	38	12	200
L-IL-TPKH-160-K-1 ID: 0029431	L-IL-TPKH-160-K-1-DSN ID: 0029436	160	45	190	52	12	260
L-IL-TPKH-200-K-1 ID: 0029432	L-IL-TPKH-200-K-1-DSN ID: 0029437	200	50	235	53	12	350



-3 (plate)



foot protection



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

thermoplastic// standard housing IS, IL// up to 450 kg



Features:

- PUBK wheel series:
- polyamide 6 wheel body with ball bearing
- polyurethane tread, approx. 95° shore A
- with thread guards to protect the ball bearing from dust and dirt

Properties:






- high load capacity
- low abrasion, non-marking, low rolling resistance
- excellent chemical resistance, oil and grease resistance
- resistant to cutting by metal chips
- (old designation: PSK)

floors



"Affordable smooth-running series for heavier loads"


wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUBK-080-30-40-K08 Ident No.: 0021578	80	30	8	40	100
PUBK-100-30-40-K08 Ident No.: 0021579	100	30	8	40	150
PUBK-125-35-50-K08 Ident No.: 0028532	125	35	8	50	200
PUBK-160-40-60-K12 Ident No.: 0026625	160	40	12	60	250
PUBK-200-50-60-K12 Ident No.: 0026626	200	50	12	60	300

Suitable castors can be found on pages 143, 144

Matching accessories can be found on page 432

polyurethane // standard housing IS, IL // up to 300 kg

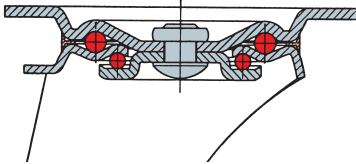

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PUBK-080-K-3 ID: 0029465	L-IL-PUBK-080-K-3-DSN ID: 0029470	B-IL-PUBK-080-K ID: 0029475	80	30	100	36	105 x 80	80 x 60	9	100
L-IL-PUBK-100-K-3 ID: 0029466	L-IL-PUBK-100-K-3-DSN ID: 0029471	B-IL-PUBK-100-K ID: 0029476	100	30	125	36	105 x 80	80 x 60	9	150
L-IL-PUBK-125-K-3 ID: 0029467	L-IL-PUBK-125-K-3-DSN ID: 0029472	B-IL-PUBK-125-K ID: 0029477	125	35	155	36	105 x 80	80 x 60	9	200
L-IL-PUBK-160-K-3 ID: 0029468	L-IL-PUBK-160-K-3-DSN ID: 0029473	B-IL-PUBK-160-K ID: 0029478	160	40	190	52	135 x 110	105 x 80	11	250
L-IL-PUBK-200-K-3 ID: 0029469	L-IL-PUBK-200-K-3-DSN ID: 0029474	B-IL-PUBK-200-K ID: 0029479	200	47	235	54	135 x 110	105 x 80	11	300



-1 (bolt hole)




foot protection



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432

polyurethane // standard housing IS, IL // up to 300 kg

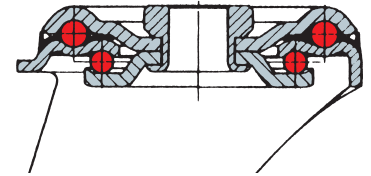

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



"Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm"



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-PUBK-080-K-1 ID: 0029480	L-IL-PUBK-080-K-1-DSN ID: 0029485	80	30	103	36	12	100
L-IL-PUBK-100-K-1 ID: 0029481	L-IL-PUBK-100-K-1-DSN ID: 0029486	100	30	125	38	12	150
L-IL-PUBK-125-K-1 ID: 0029482	L-IL-PUBK-125-K-1-DSN ID: 0029487	125	35	155	38	12	200
L-IL-PUBK-160-K-1 ID: 0029483	L-IL-PUBK-160-K-1-DSN ID: 0029488	160	40	190	52	12	250
L-IL-PUBK-200-K-1 ID: 0029484	L-IL-PUBK-200-K-1-DSN ID: 0029489	200	50	235	54	12	300



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors



Features:






- PUZK wheel series:
- polyamide 6 wheel body with ball bearing
- tread made of polyurethane, approx. 95° shore A

Properties:

- high load capacity
- low abrasion, non-marking
- shock-resistant, low rolling resistance
- resistant to oil and grease
- excellent chemical resistance
- resistant to cutting by metal chips
- (old designation: PUSKS)




 ***“Versatile, affordable, optimally designed”***

wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUZK-080-35-40-K12 Ident No.: 0015450	80	35	12	40	150
PUZK-100-35-40-K12 Ident No.: 0015451	100	35	12	40	200
PUZK-125-40-50-K15 Ident No.: 0015452	125	40	15	50	250
PUZK-150-45-60-K20 Ident No.: 0015453	150	45	20	60	380
PUZK-160-45-60-K20 Ident No.: 0015454	160	45	20	60	400
PUZK-200-50-60-K20 Ident No.: 0015455	200	50	20	60	500
PUZK-250-60-75-K25 Ident No.: 0016975	250	60	25	75	700

Suitable castors can be found on pages 146, 147, 161, 191

Matching accessories can be found on page 432

polyurethane // standard housing IS, IL // up to 450 kg

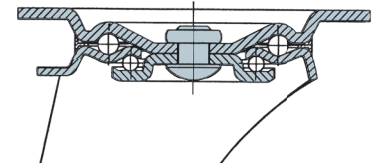

Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PUZK-080-K-3 ID: 0029784	L-IL-PUZK-080-K-3-DSN ID: 0029790	B-IL-PUZK-080-K ID: 0029796	80	35	100	36	105 x 80	80 x 60	9	150
L-IL-PUZK-100-K-3 ID: 0029785	L-IL-PUZK-100-K-3-DSN ID: 0029791	B-IL-PUZK-100-K ID: 0029797	100	35	125	36	105 x 80	80 x 60	9	180
L-IK-PUZK-100-K-3-GP ID: 0033329	L-IK-PUZK-100-K-3-DSN-GP ID: 0033330	B-IK-PUZK-100-K-GP ID: 0033327	100	35	128	46	135 x 110	105 x 80	11	180
L-IL-PUZK-125-K-3 ID: 0029786	L-IL-PUZK-125-K-3-DSN ID: 0029792	B-IL-PUZK-125-K ID: 0029798	125	40	155	36	105 x 80	80 x 60	9	225
L-IK-PUZK-125-K-3-GP ID: 0031091	L-IK-PUZK-125-K-3-DSN-GP ID: 0037786	B-IK-PUZK-125-K-GP ID: 0032272	125	40	155	48	135 x 110	105 x 80	11	225
L-IL-PUZK-150-K-3 ID: 0029787	L-IL-PUZK-150-K-3-DSN ID: 0029793	B-IL-PUZK-150-K ID: 0029799	150	45	185	52	135 x 110	105 x 80	11	300
L-IL-PUZK-160-K-3 ID: 0031634	L-IL-PUZK-160-K-3-DSN ID: 0031633	B-IL-PUZK-160-K ID: 0031690	160	45	190	52	135 x 110	105 x 80	11	300
L-IL-PUZK-200-K-3 ID: 0029788	L-IL-PUZK-200-K-3-DSN ID: 0029794	B-IL-PUZK-200-K ID: 0029800	200	50	235	54	135 x 110	105 x 80	11	400
L-IS-PUZK-250-K-3 ID: 0029789	L-IS-PUZK-250-K-3-DSV ID: 0029795	B-IS-PUZK-250-K ID: 0029801	250	60	290	66	135 x 110	105 x 80	11	400
L-IP-PUZK-250-K-3-GP ID: 0040590	L-IP-PUZK-250-K-3-DSV-GP ID: 0040591	B-IP-PUZK-250-K-GP ID: 0040592	250	60	290	70	175 x 175	140 x 140	15	450




foot protection



3-DSV
(plate+brake)

polyurethane // standard housing IS, IL // up to 450 kg

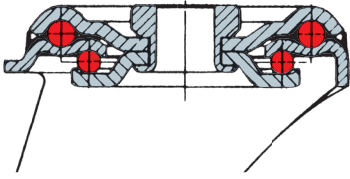

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-PUZK-080-K-1 ID: 0029802	L-IL-PUZK-080-K-1-DSN ID: 0029808	80	35	100	36	12	150
L-IL-PUZK-100-K-1 ID: 0029803	L-IL-PUZK-100-K-1-DSN ID: 0029809	100	35	125	38	12	180
L-IL-PUZK-125-K-1 ID: 0029804	L-IL-PUZK-125-K-1-DSN ID: 0029810	125	40	155	38	12	200
L-IL-PUZK-150-K-1 ID: 0029805	L-IL-PUZK-150-K-1-DSN ID: 0029811	150	45	185	52	12	300
L-IL-PUZK-160-K-1 ID: 0032405	L-IL-PUZK-160-K-1-DSN ID: 0032404	160	45	190	52	12	300
L-IL-PUZK-200-K-1 ID: 0029806	L-IL-PUZK-200-K-1-DSN ID: 0029812	200	50	235	53	12	400



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”



-3 (plate)



3-DSN (plate+ double brake)



Features:

- EPUK wheel series:
- wheel body made of polyamide 6 with 2 ball bearings
- tread made of elastic polyurethane, approx. 80° shore A rounded edges

Properties:






- runs quietly
- non-marking, low abrasion
- impact-resistant
- low rolling resistance
- excellent chemical resistance, oil and grease resistance
- (old designation: PUKS)

floors



"Improved travel comfort thanks to elastic tread surface"


wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
EPUK-080-35-40-K12 Ident No.: 0014301	80	35	12	40	130
EPUK-100-35-40-K12 Ident No.: 0014302	100	35	12	40	180
EPUK-125-40-50-K15 Ident No.: 0014303	125	40	15	50	200
EPUK-160-45-60-K20 Ident No.: 0014305	160	45	20	60	300
EPUK-200-48-60-K20 Ident No.: 0014306	200	48	20	60	450

Suitable castors can be found on pages 149, 150

Matching accessories can be found on page 432

elastic polyurethane // standard housing IS, IL // up to 450 kg

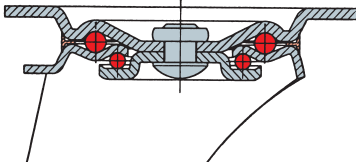

Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-EPUK-080-K-3 ID: 0030099	L-IL-EPUK-080-K-3-DSN ID: 0030105	B-IL-EPUK-080-K ID: 0030111	80	35	100	36	105 x 80	80 x 60	9	130
L-IL-EPUK-100-K-3 ID: 0030100	L-IL-EPUK-100-K-3-DSN ID: 0030106	B-IL-EPUK-100-K ID: 0030112	100	35	125	36	105 x 80	80 x 60	9	180
L-IL-EPUK-125-K-3 ID: 0030101	L-IL-EPUK-125-K-3-DSN ID: 0030107	B-IL-EPUK-125-K ID: 0030113	125	40	155	36	105 x 80	80 x 60	9	200
L-IL-EPUK-150-K-3 ID: 0019390	L-IL-EPUK-150-K-3-DSN ID: 0019401	B-IL-EPUK-150-K ID: 0019412	150	45	185	52	135 x 110	105 x 80	11	250
L-IL-EPUK-160-K-3 ID: 0030102	L-IL-EPUK-160-K-3-DSN ID: 0030108	B-IL-EPUK-160-K ID: 0030114	160	45	190	52	135 x 110	105 x 80	11	300
L-IL-EPUK-200-K-3 ID: 0030103	L-IL-EPUK-200-K-3-DSN ID: 0030109	B-IL-EPUK-200-K ID: 0030115	200	47	235	54	135 x 110	105 x 80	11	400
L-IS-EPUK-250-K-3 ID: 0030104	L-IS-EPUK-250-K-3-DSV ID: 0030110	B-IS-EPUK-250-K ID: 0030116	250	60	290	66	135 x 110	105 x 80	11	400
L-IP-EPUK-250-K-3-GP ID: 0040587	L-IP-EPUK-250-K-3-DSV-GP ID: 0040588	B-IP-EPUK-250-K-GP ID: 0040589	250	60	290	70	175 x 175	140 x 140	15	450



-1 (bolt hole)




foot protection



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432

elastic polyurethane // standard housing IS, IL // up to 400 kg

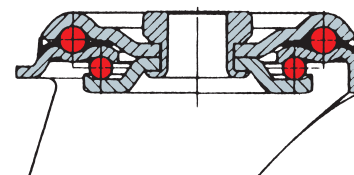







Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)




“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-EPUK-080-K-1 ID: 0030117	L-IL-EPUK-080-K-1-DSN ID: 0030122	80	35	100	36	12	130
L-IL-EPUK-100-K-1 ID: 0030118	L-IL-EPUK-100-K-1-DSN ID: 0030123	100	35	125	38	12	180
L-IL-EPUK-125-K-1 ID: 0030119	L-IL-EPUK-125-K-1-DSN ID: 0030124	125	40	155	38	12	200
L-IL-EPUK-160-K-1 ID: 0030120	L-IL-EPUK-160-K-1-DSN ID: 0030125	160	45	190	52	12	300
L-IL-EPUK-200-K-1 ID: 0030121	L-IL-EPUK-200-K-1-DSN ID: 0030126	200	47	235	53	12	400



-3 (plate)



-3 (plate)




3-DSN (plate+ double brake)

Matching accessories can be found on page 432

elastic polyurethane // standard housing IS, IL // up to 400 kg

pneumatic tires // standard housing AH, IP // up to 250 kg

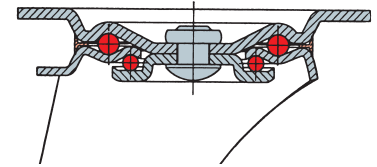

Features:


- castor series AH, IP:
- steel sheet housing, galvanized
- fork head with double ball bearing
- plastic rim
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-AH-LRK1-150-K-3 ID: 0018596	L-AH-LRK1-150-K-3-DSN ID: 0018597	B-AH-LRK1-150-K ID: 0033606	150	30	188	48	77 x 67	60 x 50	9	50
L-IP-LRK1-230-R-3 ID: 0034228	L-IP-LRK1-230-R-3-DSV ID: 0037263	B-IP-LRK1-230-R ID: 0034229	230	65	255	61	135 x 110	105 x 80	11	130
L-IP-LRK2-260-R-3 ID: 0030990	L-IP-LRK2-260-R-3-DSV ID: 0030989	B-IP-LRK1-260-R ID: 0031007	260	85	295	70	175 x 175	140 x 140	15	200
L-IP-LRK1-400-R-3 ID: 0035726		B-IP-LRK1-400-R ID: 0041462	400	100	458	75	150 x 150	125 x 125	10	250

Matching accessories can be found on page 432

pneumatic tires // standard housing AH, IP // up to 250 kg

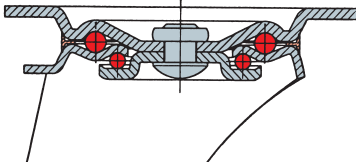

Features:

- castor series AH, IP:
- steel sheet housing, galvanized
- fork head with double ball bearing
- steel rim
- seal with integrated ball spacer
- (old designation: LCW, LRS1 and LRS4 = rib, LRS2 and LRS5 = country, LSS3 = military)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-LRS1-185-R-3 ID: 0024216	L-IS-LRS1-185-R-3-DSN ID: 0024215	B-IS-LRS1-185-R ID: 0024217	185	45	210	53	135 x 110	105 x 80	11	50
L-IL-LRS1-200-R-3 ID: 0018600	L-IL-LRS1-200-R-3-DSN ID: 0018603	B-IL-LRS1-200-R ID: 0015138	200	50	235	54	135 x 110	105 x 80	11	75
L-IP-LRS1-230-R-3 ID: 0018604	L-IP-LRS1-230-R-3-DSV ID: 0018605	B-IP-LRS1-230-R ID: 0015140	230	65	255	61	135 x 110	105 x 80	11	130
L-IP-LRS3-230-R-3 ID: 0018606	L-IP-LRS3-230-R-3-DSV ID: 0018607	B-IP-LRS3-230-R ID: 0015141	230	65	255	61	135 x 110	105 x 80	11	130
L-IP-LRS4-245-R-3 ID: 0018615	L-IP-LRS4-245-R-3-DSV ID: 0018616	B-IP-LRS4-245-R ID: 0015144	245	80	288	70	175 x 175	140 x 140	15	250
L-IP-LRS1-260-R-3 ID: 0018608	L-IP-LRS1-260-R-3-DSV ID: 0018610	B-IP-LRS1-260-R ID: 0015142	260	85	295	70	175 x 175	140 x 140	15	200
L-IP-LRS2-260-R-3 ID: 0018612	L-IP-LRS2-260-R-3-DSV ID: 0018613	B-IP-LRS2-260-R ID: 0015143	260	85	295	70	175 x 175	140 x 140	15	200
L-IP-LRS5-300-R-3 ID: 0018618		B-IP-LRS5-300-R ID: 0015145	300	100	408	75	150 x 150	125 x 125	10	250
L-IP-LRS1-400-R-3 ID: 0018634		B-IP-LRS1-400-R ID: 0015146	400	100	458	75	150 x 150	125 x 125	10	250
L-IP-LRS2-400-R-3 ID: 0018635		B-IP-LRS2-400-R ID: 0015147	400	100	458	75	150 x 150	125 x 125	10	250

Matching accessories can be found on page 432



Features:

- GPSK wheel series:
- plastic wheel body with ball and roller bearings
- tread made of expanded (foam) polyurethane
- the alternative to pneumatic tires






Properties:

- minimal impact on floor
- absorbs vibration
- low rolling resistance on uneven floors
- (old designation: PSR)

floors




wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
GPSK-100-30-37-K08 Ident No.: 0022714	100	30	8	37	60
GPSK-125-30-34-K08 Ident No.: 0022715	125	30	8	34	75
GPSK-150-30-50-K08 Ident No.: 0036949	150	30	8	50	75
GPSK-175-30-60-K08 Ident No.: 0022717	175	30	8	60	75
GPSK-200-50-60-K08 Ident No.: 0036950	200	50	8	60	100
GPVK-245-85-75-R20 Ident No.: 0037214	245	85	20	75	125
GPSK-260-85-75-R20 Ident No.: 0022720	260	85	20	75	200
GPVS-400-90-75-R25 Ident No.: 0037262	400	90	25	75	200

Matching accessories can be found on page 432

expanded (foam) polyurethane // standard housing AH, IP // up to 200 kg

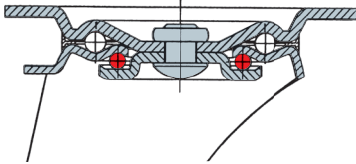

Features:


- castor series AH, IP:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-AH-GPSK-100-K-3 ID: 0018576	L-AH-GPSK-100-K-3-DSN ID: 0018577	B-AH-GPSK-100-K ID: 0015133	100	30	138	39	77 x 67	59 x 50	9	60
L-AH-GPSK-125-K-3 ID: 0018580	L-AH-GPSK-125-K-3-DSN ID: 0018581	B-AH-GPSK-125-K ID: 0015134	125	30	161	42	77 x 67	59 x 50	9	75
L-AH-GPSK-150-K-3 ID: 0018584	L-AH-GPSK-150-K-3-DSN ID: 0018585	B-AH-GPSK-150-K ID: 0012621	150	30	188	48	77 x 67	58 x 49	9	75
L-IL-GPSK-200-K-3 ID: 0018588	L-IL-GPSK-200-K-3-DSN ID: 0018589	B-IL-GPSK-200-K ID: 0015135	200	50	235	54	135 x 110	105 x 80	10.9	100
L-IP-GPVK-245-R-3 ID: 0030311	L-IP-GPVK-245-R-3-DSV ID: 0030313	B-IP-GPSK-245-R ID: 0030314	245	85	288	70	175 x 175	140 x 140	14	125
L-IP-GPSK-260-R-3 ID: 0018590	L-IP-GPSK-260-R-3-DSV ID: 0018592	B-IP-GPSK-260-R ID: 0015136	260	85	295	70	175 x 175	140 x 140	14	200
L-IP-GPVS-400-R-3 ID: 0030312		B-IP-GPSK-400-R ID: 0030315	400	100	458	75	150 x 150	125 x 125	10.5	200

Matching accessories can be found on page 432

expanded (foam) polyurethane // standard housing AH, IP // up to 200 kg

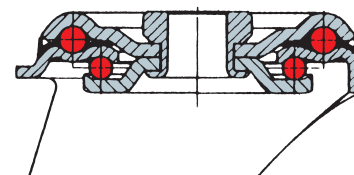

Features:

- castor series AH, IP:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)




swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-AH-GPSK-100-K-1 ID: 0018578	L-AH-GPSK-100-K-1-DSN ID: 0018579	100	30	135	39	12	60
L-AH-GPSK-125-K-1 ID: 0018582	L-AH-GPSK-125-K-1-DSN ID: 0018583	125	30	158	42	12	75
L-AH-GPSK-150-K-1 ID: 0018586	L-AH-GPSK-150-K-1-DSN ID: 0018587	150	30	184	48	12	75
L-IL-GPSK-200-K-1 ID: 0034709	L-IL-GPSK-200-K-1-DSN ID: 0035486	200	50	235	54	12	100

Matching accessories can be found on page 432

expanded (foam) polyurethane // standard housing AH, IP // up to 200 kg

polyurethane // heavy apparatus castors AH Mini/heavy // up to 150 kg

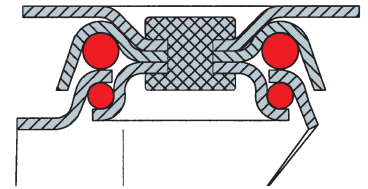

Features:

- castor series AH Mini/heavy:
- heavy, pressed apparatus housing, galvanized
- polyurethane wheels, ball bearing
- fork head with double ball bearing


 **"New series, also available with polyamide wheel"**



swivel castors	swivel castors with wheel brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-AH-PUBA-035-K-3 ID: 0040612	L-AH-PUBA-035-K-3-RF ID: 0040613	B-AH-PUBA-035-K-3 ID: 0040614	35	27	52	15	60 x 60	47 x 47	6	100
L-AH-PUBA-050-K-3 ID: 0040618	L-AH-PUBA-050-K-3-DSN ID: 0040619	B-AH-PUBA-050-K-3 ID: 0040620	50	40	82	37	80 x 80	60 x 60	8	150



polyamide




polyamide



polyamide

Matching accessories can be found on page 432

polyurethane // heavy apparatus castors AH Mini/heavy // up to 150 kg

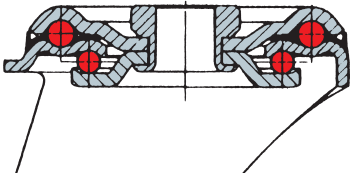







Features:

- castor series AH Mini/heavy:
- heavy, pressed apparatus housing, galvanized
- polyurethane wheels, ball bearing
- fork head with double ball bearing



"New series, also available with polyamide wheel"



swivel castors	swivel castors with wheel brake	fixed castors	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-AH-PUBA-035-K-1 ID: 0040615	L-AH-PUBA-035-K-1-RF ID: 0040616	B-AH-PUBA-035-K-1 ID: 0040617	35	27	50	15	10	100
L-AH-PUBA-050-K-1 ID: 0040621	L-AH-PUBA-050-K-1-DSN ID: 0040660		50	40	76	37	12	150



polyamide




polyamide



polyamide

Matching accessories can be found on page 432

elastic rubber // medium-weight housing IN // up to 250 kg

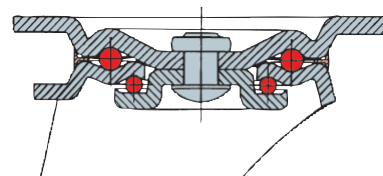

Features:


- castor series IN (new):
- heavy steel plate housing, galvanized
- fork head with double ball bearing




"New series, also available with polyamide wheel"



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IN-EGA-100-K-3 ID: 0040570	L-IN-EGA-100-K-3-DSN ID: 0040571	B-IN-EGA-100-K-3 ID: 0040572	100	40	129	40	105 x 86	80 x 60	10	180
L-IN-EGK-125-K-3-grey ID: 0040370	L-IN-EGK-125-K-3-DSN-grey ID: 0040371	B-IN-EGK-125-K-3-grey ID: 0040372	125	36	157	43	105 x 86	80 x 60	10	250



wheel ø 125 mm with grey rubber




wheel ø 125 mm with grey rubber



wheel ø 125 mm with grey rubber

Matching accessories can be found on page 432

elastic rubber // medium-weight housing IN // up to 250 kg

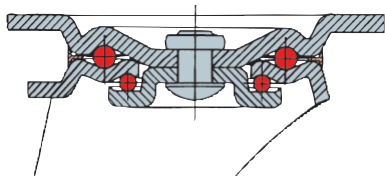

Features:

- castor series IN (new):
- heavy steel plate housing, galvanized
- fork head with double ball bearing



"New series, also available with polyamide wheel"



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IN-PUZA-100-K-3 ID: 0040360	L-IN-PUZA-100-K-3-DSN ID: 0040361	B-IN-PUZA-100-K-3 ID: 0040362	100	40	129	40	105 x 86	80 x 60	10	250
L-IN-PUZK-125-K-3 ID: 0040366	L-IN-PUZK-125-K-3-DSN ID: 0040367	B-IN-PUZK-125-K-3-DSN ID: 0040368	125	40	157	43	105 x 86	80 x 60	10	250



castors with wheel ø 100 mm




castors with wheel ø 100 mm



castors with wheel ø 100 mm

Matching accessories can be found on page 432

plastic // medium-weight housing IN // up to 250 kg

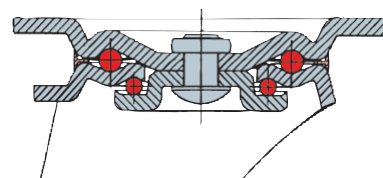

Features:

- castor series IN (new):
- heavy steel plate housing, galvanized
- fork head with double ball bearing



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IN-PAM-100-K-3 ID: 0040357	L-IN-PAM-100-K-3-DSN ID: 0040358	B-IN-PAM-100-K ID: 0040359	100	35	129	40	105 x 86	80 x 60	10	250
L-IN-PPH-125-K-3 ID: 0040363	L-IN-PPH-125-K-3-DSN ID: 0040364	B-IN-PPH-125-K ID: 0040365	125	40	157	43	105 x 86	80 x 60	10	250

Matching accessories can be found on page 432

plastic // medium-weight housing IN **//** up to 250 kg



Features:

- PPBL wheel series:
- polypropylene wheel body with ball bearing
- with thread guards to protect the ball bearing from dust and dirt

Properties:

- excellent chemical resistance
- long service life
- runs well on smooth floor surfaces
- low rolling resistance
- (old designation: PPK)

floors



“Low-cost smooth-running ball bearing series: for flat floors”

wheels

PPBL-080-30-40-K08
Ident No.: 0021575

PPBL-100-30-40-K08
Ident No.: 0021576

PPBL-125-35-50-K08
Ident No.: 0028534

PPBL-160-40-60-K12
Ident No.: 0026623

PPBL-200-47-60-K12
Ident No.: 0026624



wheel \varnothing
mm



wheel width
mm



axle hole \varnothing
mm



hub length
mm



load-carrying
capacity kg

80

30

8

40

150

100

30

8

40

180

125

35

8

50

210

160

40

12

60

300

200

47

12


60

400

Suitable castors can be found on pages 165, 166

Matching accessories can be found on page 432

polypropylene // standard housing IS, IL // up to 350 kg

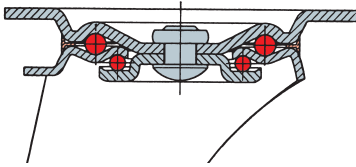

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PPBL-080-K-3 ID: 0029440	L-IL-PPBL-080-K-3-DSN ID: 0029445	B-IL-PPBL-080-K ID: 0029450	80	30	100	36	105 x 80	80 x 60	9	150
L-IL-PPBL-100-K-3 ID: 0029441	L-IL-PPBL-100-K-3-DSN ID: 0029446	B-IL-PPBL-100-K ID: 0029451	100	30	125	36	105 x 80	80 x 60	9	180
L-IL-PPBL-125-K-3 ID: 0029442	L-IL-PPBL-125-K-3-DSN ID: 0029447	B-IL-PPBL-125-K ID: 0029452	125	35	155	36	105 x 80	80 x 60	9	210
L-IL-PPBL-160-K-3 ID: 0029443	L-IL-PPBL-160-K-3-DSN ID: 0029448	B-IL-PPBL-160-K ID: 0029453	160	40	190	52	135 x 110	105 x 80	11	300
L-IL-PPBL-200-K-3 ID: 0029444	L-IL-PPBL-200-K-3-DSN ID: 0029449	B-IL-PPBL-200-K ID: 0029454	200	47	235	54	135 x 110	105 x 80	11	350




-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432

polypropylene // standard housing IS, IL // up to 350 kg

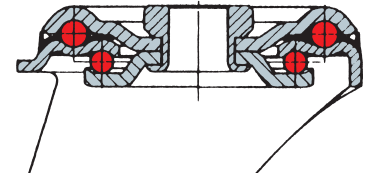







Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



"Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm"



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-PPBL-080-K-1 ID: 0029455	L-IL-PPBL-080-K-1-DSN ID: 0029460	80	30	100	36	12	150
L-IL-PPBL-100-K-1 ID: 0029456	L-IL-PPBL-100-K-1-DSN ID: 0029461	100	30	125	38	12	180
L-IL-PPBL-125-K-1 ID: 0029457	L-IL-PPBL-125-K-1-DSN ID: 0029462	125	35	155	38	12	210
L-IL-PPBL-160-K-1 ID: 0029458	L-IL-PPBL-160-K-1-DSN ID: 0029463	160	40	190	52	12	300
L-IL-PPBL-200-K-1 ID: 0029459	L-IL-PPBL-200-K-1-DSN ID: 0029464	200	47	235	54	12	350



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors








Features:

- PPH wheel series:
- polypropylene wheel body with 2 ball bearings

Properties:

- excellent chemical resistance
- high load capacity
- long service life
- runs well on smooth floor surfaces
- low rolling resistance
- (old designation: PPKS)




wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PPH-080-35-40-K12 Ident No.: 0015426	80	35	12	40	150
PPH-100-35-40-K12 Ident No.: 0015427	100	35	12	40	200
PPH-125-40-50-K15 Ident No.: 0015428	125	40	15	50	300
PPH-150-45-60-K20 Ident No.: 0015429	150	45	20	60	450
PPH-160-45-60-K20 Ident No.: 0015430	160	45	20	60	450
PPH-200-50-60-K20 Ident No.: 0015431	200	50	20	60	550
PPH-250-60-75-K25 Ident No.: 0016963	250	60	25	75	700

Suitable castors can be found on pages 168, 169

Matching accessories can be found on page 432

polypropylene // standard housing IS, IL // up to 350 kg

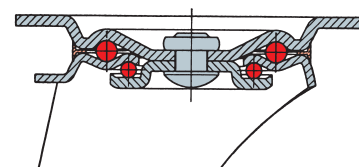

Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PPH-080-K-3 ID: 0029998	L-IL-PPH-080-K-3-DSN ID: 0030004	B-IL-PPH-080-K ID: 0030010	80	35	100	36	105 x 80	80 x 60	9	150
L-IL-PPH-100-K-3 ID: 0029999	L-IL-PPH-100-K-3-DSN ID: 0030005	B-IL-PPH-100-K ID: 0030011	100	35	125	36	105 x 80	80 x 60	9	200
L-IL-PPH-125-K-3 ID: 0030000	L-IL-PPH-125-K-3-DSN ID: 0030006	B-IL-PPH-125-K ID: 0030012	125	40	155	36	105 x 80	80 x 60	9	200
L-IL-PPH-150-K-3 ID: 0030001	L-IL-PPH-150-K-3-DSN ID: 0030007	B-IL-PPH-150-K ID: 0030013	150	45	185	52	135 x 110	105 x 80	11	300
L-IL-PPH-160-K-3 ID: 0032857	L-IL-PPH-160-K-3-DSN ID: 0032858	B-IL-PPH-160-K ID: 0032859	160	45	190	52	135 x 110	105 x 80	11	300
L-IL-PPH-200-K-3 ID: 0030002	L-IL-PPH-200-K-3-DSN ID: 003,0008	B-IL-PPH-200-K ID: 0030014	200	50	235	54	135 x 110	105 x 80	11	350
L-IK-PPH-250-K-3 ID: 0030003	L-IK-PPH-250-K-3-DSV ID: 0030499	B-IK-PPH-250-K ID: 0030015	250	60	290	66	135 x 110	105 x 80	11	350

Matching accessories can be found on page 432

polypropylene // standard housing IS, IL // up to 350 kg

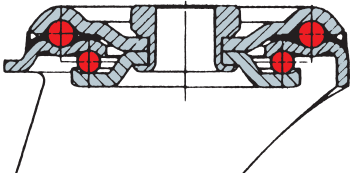

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-PPH-080-K-1 ID: 0030016	L-IL-PPH-080-K-1-DSN ID: 0030021	80	34	100	36	12	150
L-IL-PPH-100-K-1 ID: 0030017	L-IL-PPH-100-K-1-DSN ID: 0030022	100	34	125	38	12	200
L-IL-PPH-125-K-1 ID: 0030018	L-IL-PPH-125-K-1-DSN ID: 0030023	125	40	155	38	12	200
L-IL-PPH-150-K-1 ID: 0030019	L-IL-PPH-150-K-1-DSN ID: 0030024	150	45	185	52	12	300
L-IL-PPH-200-K-1 ID: 0030020	L-IL-PPH-200-K-1-DSN ID: 0030025	200	50	235	54	12	350



“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”

Matching accessories can be found on page 432



Features:

- PALB and PALZ wheel series, with plain bearings:
- polyamide 6 wheel body with plain bearings
- polyamide 6 can absorb and release moisture

Properties:




- excellent chemical resistance
- high load capacity
- resistant to fracturing even at heavy loads
- long service life
- runs well on smooth floor surfaces
- (old designation: POD/TG)

floors



“Our PALB series with strongly convex running surface: excellent turning characteristics”


wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PALZ-058-25-34-G10 Ident No.: 0021360	58	25	10	34	100
PALZ-065-30-40-G12 Ident No.: 0024698	65	30	12	40	120
PALB-080-33-40-G12 Ident No.: 0033518	80	33	12	40	150
PALB-100-35-40-G12 Ident No.: 0033519	100	35	12	40	200
PALB-125-36-50-G15 Ident No.: 0033520	125	36	15	50	300
PALB-150-40-58-G20 Ident No.: 0033521	150	40	20	58	450
PALZ-175-48-60-G20 Ident No.: 0024713	175	48	20	60	500
PALB-200-48-58-G20 Ident No.: 0033522	200	48	20	58	550
PALZ-250-58-75-G25 Ident No.: 0024717	250	58	25	75	700

Suitable castors can be found on pages 171, 172

Matching accessories can be found on page 432

polyamide // standard housing IS, IL // up to 450 kg

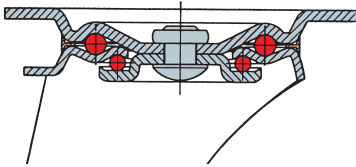

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PALB-080-G-3 ID: 0033821	L-IL-PALB-080-G-3-DSN ID: 0033828	B-IL-PALB-080-G ID: 0033833	80	33	100	36	105 x 80	80 x 60	9	150
L-IL-PALB-100-G-3 ID: 0033822	L-IL-PALB-100-G-3-DSN ID: 0033829	B-IL-PALB-100-G ID: 0033834	100	35	125	36	105 x 80	80 x 60	9	200
L-IL-PALB-125-G-3 ID: 0033823	L-IL-PALB-125-G-3-DSN ID: 0033830	B-IL-PALB-125-G ID: 0033835	125	36	155	36	105 x 80	80 x 60	9	200
L-IL-PALB-150-G-3 ID: 0033824	L-IL-PALB-150-G-3-DSN ID: 0033831	B-IL-PALB-150-G ID: 0033836	150	40	185	52	135 x 110	105 x 80	11	300
L-IL-PALZ-175-G-3 ID: 0029608	L-IL-PALZ-175-G-3-DSN ID: 0029614	B-IL-PALZ-175-G ID: 0029602	175	45	208	52	135 x 110	105 x 80	11	350
L-IL-PALB-200-G-3 ID: 0033827	L-IL-PALB-200-G-3-DSN ID: 0033832	B-IL-PALB-200-G ID: 0033837	200	48	235	54	135 x 110	105 x 80	11	350
L-LK-PALZ-250-G-3 ID: 0029973	L-LK-PALZ-250-G-3-DSV ID: 0029975	B-IL-PALZ-250-G ID: 0029977	250	58	290	66	135 x 110	105 x 80	11	400
L-IP-PALZ-250-G-3-GP ID: 0029974	L-IP-PALZ-250-G-3-DSV-GP ID: 0029976	B-IP-PALZ-250-G-GP ID: 0029978	250	58	290	70	175 x 175	140 x 140	14	450




-1 (bolt hole)



1-DSN (bolt hole+
double brake)


Matching accessories can be found on page 432

polyamide // standard housing IS, IL // up to 350 kg

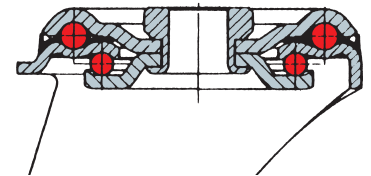








Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

 **"Bolt hole 12 or 16 mm is optionally available for wheel diameters 150 and 200 mm"**



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-PALB-080-G-1 ID: 0033782	L-IL-PALB-080-G-1-DSN ID: 0033805	80	33	100	36	12	150
L-IL-PALB-100-G-1 ID: 0033783	L-IL-PALB-100-G-1-DSN ID: 0033806	100	35	125	36	12	200
L-IL-PALB-125-G-1 ID: 0033784	L-IL-PALB-125-G-1-DSN ID: 0033807	125	36	155	36	12	200
L-IL-PALB-150-G-1 ID: 0033803	L-IL-PALB-150-G-1-DSN ID: 0033808	150	40	185	52	12	300
L-IL-PALB-200-G-1 ID: 0033804	L-IL-PALB-200-G-1-DSN ID: 0033809	200	48	235	54	16	350



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432

floors



Features:






- PALB and PALZ wheel series, with roller bearings:
- polyamide 6 wheel body with roller bearings
- polyamide 6 can absorb and release moisture

Properties:

- excellent chemical resistance
- high load capacity
- resistant to fracturing even at heavy loads
- long service life
- runs well on smooth floor surfaces
- low rolling resistance
- (old designation: POD/TR)




 **“Our PALB series with strongly convex running surface: excellent turning characteristics”**

wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PALZ-058-29-31-R10 Ident No.: 0035502	58	29	10	31	75
PALZ-065-30-40-R12 Ident No.: 0025281	65	30	12	40	120
PALB-080-33-40-R12 Ident No.: 0033523	80	33	12	40	150
PALB-100-35-40-R12 Ident No.: 0033524	100	35	12	40	200
PALB-125-36-50-R15 Ident No.: 0033525	125	36	15	50	300
PALB-150-40-58-R20 Ident No.: 0033526	150	40	20	58	450
PALZ-175-48-60-R20 Ident No.: 0025294	175	48	20	60	500
PALB-200-48-58-R20 Ident No.: 0033527	200	48	20	58	550
PALZ-250-58-75-R25 Ident No.: 0025297	250	58	25	75	700

Suitable castors can be found on pages 174, 175

Matching accessories can be found on page 432

polyamide // standard housing IS, IL // up to 450 kg

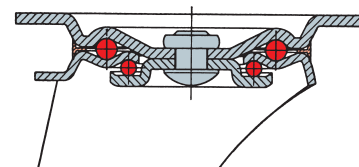

Features:


- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-PALZ-058-R-3 ID: 0012175		B-IS-PALZ-058-R ID: 0012134	58	29	76	21	80 x 60	60 x 40	7	75
L-IS-PALZ-065-R-3-black ID: 0012178		B-IS-PALZ-065-R-black ID: 0012136	65	32	87	20	95 x 70	75 x 45	7	100
L-IL-PALB-080-R-3 ID: 0033839	L-IL-PALB-080-R-3-DSN ID: 0033845	B-IL-PALB-080-R ID: 0033850	80	33	100	36	105 x 80	80 x 60	9	150
L-IL-PALB-100-R-3 ID: 0033841	L-IL-PALB-100-R-3-DSN ID: 0033846	B-IL-PALB-100-R ID: 0033851	100	35	125	36	105 x 80	80 x 60	9	200
L-IK-PALZ-100-R-3-GP ID: 0031009	L-IL-PALZ-100-R-3-DSN ID: 0038110	B-IL-PALZ-100-3 ID: 0038111	100	38	128	45	135 x 110	105 x 80	11	200
L-IL-PALB-125-R-3 ID: 0033842	L-IL-PALB-125-R-3-DSN ID: 0033847	B-IL-PALB-125-R ID: 0033852	125	36	155	36	105 x 80	80 x 60	9	200
L-IK-PALZ-125-R-3-GP ID: 0012236	L-IL-PALZ-125-R-3-DSV ID: 0031305	B-IL-PALZ-125-R ID: 0012157	125	38	155	48	135 x 110	105 x 80	11	300
L-IL-PALB-150-R-3 ID: 0033843	L-IL-PALB-150-R-3-DSN ID: 0033848	B-IL-PALB-150-R ID: 0033853	150	40	185	52	135 x 110	105 x 80	11	300
L-IS-PALZ-175-R-3 ID: 0029552	L-IS-PALZ-175-R-3-DSN ID: 0029559	B-IS-PALZ-175-R ID: 0029566	175	45	208	52	135 x 105	105 x 80	11	350
L-IL-PALB-200-R-3 ID: 0033844	L-IL-PALB-200-R-3-DSN ID: 0033849	B-IL-PALB-200-R ID: 0033854	200	48	235	54	135 x 110	105 x 80	11	350
L-IK-PALZ-250-R-3 ID: 0012456	L-IK-PALZ-250-R-3-DSN ID: 0012457	B-IK-PALZ-250-R ID: 0012172	250	58	290	66	135 x 110	105 x 80	11	400
L-IP-PALZ-250-R-3-GP ID: 0029554	L-IP-PALZ-250-R-3-DSV-GP ID: 0029561	B-IP-PALZ-250-R-GP ID: 0029568	250	58	290	70	175 x 175	140 x 140	15	450

Matching accessories can be found on page 432

polyamide // standard housing IS, IL // up to 450 kg

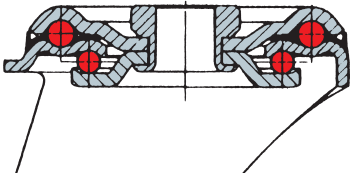

Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-PALB-080-R-1 ID: 0033810	L-IL-PALB-080-R-1-DSN ID: 0033815	80	33	100	36	12	150
L-IL-PALB-100-R-1 ID: 0033811	L-IL-PALB-100-R-1-DSN ID: 0033816	100	35	125	36	12	200
L-IL-PALB-125-R-1 ID: 0033812	L-IL-PALB-125-R-1-DSN ID: 0033817	125	36	155	36	12	200
L-IL-PALB-150-R-1 ID: 0033813	L-IL-PALB-150-R-1-DSN ID: 0033818	150	40	185	52	12	300
L-IL-PALB-200-R-1 ID: 0033814	L-IL-PALB-200-R-1-DSN ID: 0033819	200	48	235	54	16	350



"Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm"

Matching accessories can be found on page 432



Features:

- HDK wheel series:
- plastic wheel body, black, with plain bearings

Properties:

- extremely temperature resistant: -40° C to +250° C
- (old designation: HI)

Note:






These wheels are not entirely suitable for crossing thresholds and for use on uneven floors.

floors




"Duroplast castors: for up to 250° C"

wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
HDK-080-33-40-G12 Ident No.: 0016807	80	33	12	40	150
HDK-100-34-40-G12 Ident No.: 0016809	100	34	12	40	160
HDK-125-40-48-G15 Ident No.: 0016814	125	40	15	48	180
HDK-150-50-58-G20 Ident No.: 0016818	150	50	20	58	250
HDK-200-52-58-G20 Ident No.: 0016822	200	52	20	58	300

heat-resistant plastic // standard housing IT // up to 300 kg

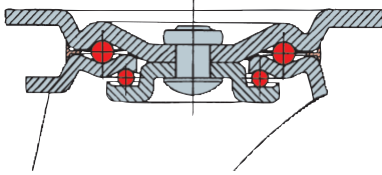

Features:

- castor series IT:
- steel sheet housing, shiny galvanized
- fork head with double ball bearing
- without plastic seal in the fork head
- with temperature-resistant grease
- (old designation: LO)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IT-HDK-080-G-3 ID: 0030244	L-IT-HDK-080-G-3-DSN ID: 0030249	B-IT-HDK-080-G ID: 0030254	80	33	108	36	100 x 80	80 x 60	9	90
L-IT-HDK-100-G-3 ID: 0030245	L-IT-HDK-100-G-3-DSN ID: 0030250	B-IT-HDK-100-G ID: 0030255	100	34	128	36	100 x 80	80 x 60	9	110
L-IT-HDK-125-G-3 ID: 0030246	L-IT-HDK-125-G-3-DSN ID: 0030251	B-IT-HDK-125-G ID: 0030256	125	38	158	41	117 x 85	80 x 60	9	150
L-IT-HDK-150-G-3 ID: 0030247	L-IT-HDK-150-G-3-DSN ID: 0030252	B-IT-HDK-150-G ID: 0030257	150	50	202	46	133 x 106	105 x 80	12	200
L-IT-HDK-200-G-3 ID: 0030248	L-IT-HDK-200-G-3-DSN ID: 0030253	B-IT-HDK-200-G ID: 0030258	200	52	239	54	140 x 110	105 x 80	12	300

Matching accessories can be found on page 432

wheels // HDK - heat-resistant



Features:

- HGK wheel series:
- wheel body made of plastic, black, with plain or ball bearing
- rubber tread, red

Properties:

- non-marking
- permanently elastic
- extremely temperature resistant: -60° C to +250° C
- (old designation: HI-Soft)






Note:

The specified load-carrying capacity is reduced by approx. 30% at the max. warming

floors




wheels

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
HGK-080-30-39-G12 Ident No.: 0034413	80	30	12	39	40
HGK-100-30-38-G12 Ident No.: 0016811	100	30	12	38	60
HGK-125-30-38-G12 Ident No.: 0016816	125	30	12	38	80
HGK-150-40-58-K20 Ident No.: 0033075	150	40	20	58	100
HGK-200-50-59-G20 Ident No.: 0080034	200	50	20	59	200

Matching accessories can be found on page 432

heat-resistant rubber // standard housing IT // up to 100 kg

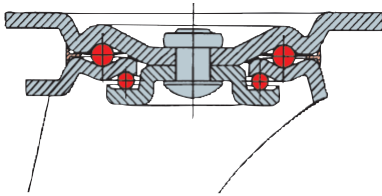

Features:


- castor series IT:
- steel sheet housing, shiny galvanized
- fork head with double ball bearing
- without plastic seal in the fork head
- with temperature-resistant grease
- (old designation: LO)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IT-HGK-100-G-3 ID: 0030259	L-IT-HGK-100-G-3-DSN ID: 0030261	B-IT-HGK-100-G ID: 0030263	100	30	128	36	100 x 80	80 x 60	9	60
L-IT-HGK-125-G-3 ID: 0030260	L-IT-HGK-125-G-3-DSN ID: 0030262	B-IT-HGK-125-G ID: 0030264	125	30	155	41	100 x 80	80 x 60	9	80
L-IT-HGK-150-K-3 ID: 0032862	L-IT-HGK-150-G-3-DSN ID: 0040652	B-IT-HGK-150-K ID: 0032863	150	40	202	46	130 x 106	105 x 80	11	100

Matching accessories can be found on page 432

heat-resistant rubber // stainless steel standard series IV // up to 80 kg

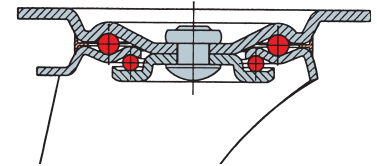

Features:


- castor series IV:
- standard stainless steel housing
- fork head with double ball bearing
- all mounted parts are resistant to rust and acid
- (old designation: RFL/...)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IV-HGK-100-G-3 ID: 0023430	L-IV-HGK-100-G-3-DSN ID: 0023431	B-IV-HGK-100-G ID: 0023298	100	30	128	32	100 x 80	80 x 60	9	60
L-IV-HGK-125-G-3 ID: 0023432	L-IV-HGK-125-G-3-DSN ID: 0023433	B-IV-HGK-125-G ID: 0023299	125	30	155	32	100 x 80	80 x 60	9	100

Matching accessories can be found on page 432



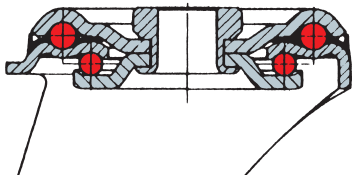



heat-resistant rubber // stainless steel standard series IV // up to 100 kg



Features:

- castor series IV:
- standard stainless steel housing
- fork head with double ball bearing
- all mounted parts are resistant to rust and acid
- (old designation: RFL/...)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IV-HGK-100-G-1 ID: 0034185	L-IV-HGK-100-G-1-DSN ID: 0035735	100	30	128	32	12	60
L-IV-HGK-125-G-1 ID: 0036981	L-IV-HGK-125-G-1-DSN ID: 0037325	125	30	155	32	12	80
L-IV-HGK-150-K-1 ID: 0035009	L-IV-HGK-150-K-1-DSN ID: 0035010	150	40	192	52	12	100

Matching accessories can be found on page 432