

# MEDIUM-WEIGHT CASTORS UP TO 700 KG



| SERIES                 | medium-weight castors elastic solid rubber | medium-weight castors thermoplastic | medium-weight castors polyurethane | medium-weight castors elastic polyurethane | medium-weight castors polyamide |
|------------------------|--|-------------------------------------|------------------------------------|--|---------------------------------|
| LOAD-CARRYING CAPACITY | up to 500 kg                               | up to 450 kg                        | up to 700 kg                       | up to 700 kg                               | up to 700 kg                    |
| WHEEL-Ø                | 80 mm – 250 mm                             | 80 mm – 250 mm                      | 80 mm – 250 mm                     | 80 mm – 250 mm                             | 80 mm – 250 mm                  |
| MATERIAL/TIRES         | elastic solid rubber                       | thermoplastic                       | polyurethane                       | elastic polyurethane                       | polyamide                       |
| BEARING                | ball bearing                               | ball bearing                        | ball bearing                       | ball bearing                               | ball bearing                    |
| PAGES                  | <b>186</b>                                 | <b>188</b>                          | <b>190</b>                         | <b>194</b>                                 | <b>196</b>                      |



***“Hardened bearing shells”***



## Castors with **medium-weight housing up to 700 kg**

Torwegge's medium-duty series of housing are made from deep-drawn, galvanized steel sheet with a stronger design to match the tougher operational demands. The top of the housing has double ball bearings and stable rivets. Medium-duty castors are commonly used by a variety of industrial sectors in transport racks. They can carry a max. load of 1,800 kg at 4 m/h.

### Housing description

- ☞ version with mounting plate
- ☞ double brake for the post-run
- ☞ fork head with double ball bearing
- ☞ riveted fork head
- ☞ seal with integrated ball spacer
- ☞ maintenance-free: lubricated with long-life grease
- ☞ can be retrofitted with foot protection

### Temperature range

-25° C to + 90° C

### areas of use // floors





**Features:**

- EGA wheel series:
- die-cast aluminum wheel body with ball bearing
- tread surface made of elastic solid rubber, black, approx. 65° shore A






**Properties:**

- high elasticity with low rolling resistance
- runs quietly
- sturdy and shock-resistant
- absorbs vibration
- also available with grey wheels
- (old designation: F3)

**floors**




**wheels**

|   |  wheel ø<br>mm |  wheel width<br>mm |  axle hole ø<br>mm |  hub length<br>mm |  load-carrying<br>capacity kg |
|---|---|---|---|--|--|
| EGA-080-38-40-K12<br>Ident No.: 0017789 | 80  | 38  | 12  | 40   | 120  |
| EGA-100-40-40-K12<br>Ident No.: 0038446 | 100   | 40  | 12  | 40   | 180  |
| EGA-125-40-50-K20<br>Ident No.: 0038447 | 125   | 40  | 20  | 50   | 200  |
| EGA-160-50-60-K20<br>Ident No.: 0038448 | 160   | 50  | 20  | 60   | 300  |
| EGA-200-50-60-K20<br>Ident No.: 0037761 | 200   | 50  | 20  | 60   | 400  |
| EGA-250-50-60-K25<br>Ident No.: 0037797 | 250   | 50  | 25  | 60   | 500  |

Suitable castors can be found on pages 130, 131, 160, 187, 203

Matching accessories can be found on page 432

# elastic rubber // medium-weight housing IM // up to 500 kg

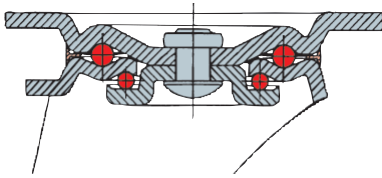

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                  | swivel castors with double brake    | fixed castors                 | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|---------------------------------|-------------------------------------|-------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-EGA-080-K-3<br>ID: 0027613 | L-IM-EGA-080-K-3-DSN<br>ID: 0027612 | B-IM-EGA-080-K<br>ID: 0027614 | 80         | 38             | 108       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 120                       |
| L-IM-EGA-100-K-3<br>ID: 0020250 | L-IM-EGA-100-K-3-DSN<br>ID: 0020255 | B-IM-EGA-100-K<br>ID: 0020260 | 100        | 40             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 180                       |
| L-IM-EGA-125-K-3<br>ID: 0020251 | L-IM-EGA-125-K-3-DSN<br>ID: 0020256 | B-IM-EGA-125-K<br>ID: 0020261 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 200                       |
| L-IM-EGA-160-K-3<br>ID: 0020252 | L-IM-EGA-160-K-3-DSN<br>ID: 0020257 | B-IM-EGA-160-K<br>ID: 0020262 | 160        | 50             | 200       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 300                       |
| L-IM-EGA-200-K-3<br>ID: 0020253 | L-IM-EGA-200-K-3-DSN<br>ID: 0020258 | B-IM-EGA-200-K<br>ID: 0020263 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 400                       |
| L-IM-EGA-250-K-3<br>ID: 0023359 | L-IM-EGA-250-K-3-DSN<br>ID: 0023360 | B-IM-EGA-250-K<br>ID: 0023361 | 250        | 50             | 297       | 67                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |



3-DSV  
(plate+brake)

Matching accessories can be found on page 432



**Features:**

- TPKH wheel series:
- polypropylene wheel body with 2 ball bearings per wheel
- tread made of thermoplastic rubber, grey, approx. 85° shore A

**Properties:**

- runs quietly
- non-marking
- higher load-carrying capacity than rubber
- minimal rolling resistance
- shock-resistant
- (old designation: THKS)

**floors**



 **“Heavy-duty design with two ball bearings”**

**wheels**



wheel ø  
mm



wheel width  
mm



axle hole ø  
mm



hub length  
mm




load-carrying  
capacity kg

|  |     |    |    |    |     |
|--|-----|----|----|----|-----|
| TPKH-080-35-40-K12<br>Ident No.: 0014307 | 80  | 35 | 12 | 40 | 120 |
| TPKH-100-35-40-K12<br>Ident No.: 0014308 | 100 | 35 | 12 | 40 | 150 |
| TPKH-125-40-50-K15<br>Ident No.: 0014309 | 125 | 40 | 15 | 50 | 200 |
| TPKH-150-45-60-K20<br>Ident No.: 0014310 | 150 | 45 | 20 | 60 | 260 |
| TPKH-160-45-60-K20<br>Ident No.: 0014311 | 160 | 45 | 20 | 60 | 260 |
| TPKH-200-50-60-K20<br>Ident No.: 0014312 | 200 | 50 | 20 | 60 | 350 |
| TPKH-250-60-75-K25<br>Ident No.: 0016967 | 250 | 60 | 25 | 75 | 450 |

Suitable castors can be found on pages 139, 140, 189

Matching accessories can be found on page 432

# thermoplastic // medium-weight housing IM // up to 450 kg

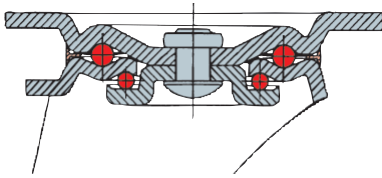

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                   | swivel castors with double brake     | fixed castors                  | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|----------------------------------|--------------------------------------|--------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-TPKH-080-K-3<br>ID: 0020317 | L-IM-TPKH-080-K-3-DSN<br>ID: 0020323 | B-IM-TPKH-080-K<br>ID: 0020329 | 80         | 35             | 108       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 120                       |
| L-IM-TPKH-100-K-3<br>ID: 0020318 | L-IM-TPKH-100-K-3-DSN<br>ID: 0020324 | B-IM-TPKH-100-K<br>ID: 0020330 | 100        | 35             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 150                       |
| L-IM-TPKH-125-K-3<br>ID: 0020319 | L-IM-TPKH-125-K-3-DSN<br>ID: 0020325 | B-IM-TPKH-125-K<br>ID: 0020331 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 200                       |
| L-IM-TPKH-160-K-3<br>ID: 0020320 | L-IM-TPKH-160-K-3-DSN<br>ID: 0020326 | B-IM-TPKH-160-K<br>ID: 0020332 | 160        | 45             | 200       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 260                       |
| L-IM-TPKH-200-K-3<br>ID: 0020321 | L-IM-TPKH-200-K-3-DSN<br>ID: 0020327 | B-IM-TPKH-200-K<br>ID: 0020333 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 350                       |
| L-IM-TPKH-250-K-3<br>ID: 0023317 | L-IM-TPKH-250-K-3-DSV<br>ID: 0020328 | B-IM-TPKH-250-K<br>ID: 0023322 | 250        | 60             | 297       | 67                           | 135 x 110     | 105 x 80        | 10.5      | 450                       |

Matching accessories can be found on page 432



**Features:**

- PUZK wheel series:
- polyamide 6 wheel body with ball bearing
- tread made of polyurethane, approx. 95° shore A

**Properties:**






- high load capacity
- low abrasion, non-marking
- shock-resistant, low rolling resistance
- resistant to oil and grease
- excellent chemical resistance
- resistant to cutting by metal chips
- (old designation: PUSKS)

**floors**



 ***“Versatile, affordable, optimally designed”***

**wheels**


|  |  wheel ø mm |  wheel width mm |  axle hole ø mm |  hub length mm |  load-carrying capacity kg |
|--|--|--|--|---|---|
| PUZK-080-35-40-K12<br>Ident No.: 0015450 | 80   | 35   | 12   | 40  | 150   |
| PUZK-100-35-40-K12<br>Ident No.: 0015451 | 100  | 35   | 12   | 40  | 200   |
| PUZK-125-40-50-K15<br>Ident No.: 0015452 | 125  | 40   | 15   | 50  | 250   |
| PUZK-150-45-60-K20<br>Ident No.: 0015453 | 150  | 45   | 20   | 60  | 380   |
| PUZK-160-45-60-K20<br>Ident No.: 0015454 | 160  | 45   | 20   | 60  | 400   |
| PUZK-200-50-60-K20<br>Ident No.: 0015455 | 200  | 50   | 20   | 60  | 500   |
| PUZK-250-60-75-K25<br>Ident No.: 0016975 | 250  | 60   | 25   | 75  | 700   |

Suitable castors can be found on pages 146, 147, 161, 191

Matching accessories can be found on page 432



# polyurethane // medium-weight housing IM // up to 700 kg

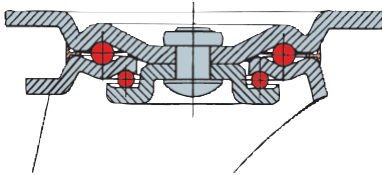

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                   | swivel castors with double brake      | fixed castors                  | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|----------------------------------|---------------------------------------|--------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-PUZK-080-K-3<br>ID: 0021242 | L-IM-PUZK-080-K-3-DSN<br>ID: 0021248  | B-IM-PUZK-080-K<br>ID: 0021254 | 80         | 35             | 108       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 150                       |
| L-IM-PUZK-100-K-3<br>ID: 0021243 | L-IM-PUZK-100-K-3-DSN<br>ID: 0021249  | B-IM-PUZK-100-K<br>ID: 0021255 | 100        | 35             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 200                       |
| L-IM-PUZK-125-K-3<br>ID: 0021244 | L-IM-PUZK-125-K-3-DSN<br>ID: 0021,250 | B-IM-PUZK-125-K<br>ID: 0021256 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 250                       |
| L-IM-PUZK-160-K-3<br>ID: 0021245 | L-IM-PUZK-160-K-3-DSN<br>ID: 0021251  | B-IM-PUZK-160-K<br>ID: 0021257 | 160        | 45             | 200       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 380                       |
| L-IM-PUZK-200-K-3<br>ID: 0021246 | L-IM-PUZK-200-K-3-DSN<br>ID: 0021252  | B-IM-PUZK-200-K<br>ID: 0021258 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-PUZK-250-K-3<br>ID: 0023333 | L-IM-PUZK-250-K-3-DSV<br>ID: 0023336  | B-IM-PUZK-250-K<br>ID: 0023339 | 250        | 60             | 297       | 67                           | 135 x 110     | 105 x 80        | 10.5      | 700                       |



3-DSV  
(plate+brake)

Matching accessories can be found on page 432



**Features:**


- PUZA wheel series:
- die-cast aluminum wheel body with ball bearing
- tread made of molded polyurethane, approx. 92° shore A
- cylindrical tread

**Properties:**






- high load capacity
- low abrasion, non-marking, shock-resistant
- low rolling resistance
- excellent chemical resistance, oil and grease resistance
- resistant to cutting by metal chips
- (old designation: PA)

**floors**



 **“Low weight + high load capacity”**


**wheels**

|  |  wheel ø mm |  wheel width mm |  axle hole ø mm |  hub length mm |  load-carrying capacity kg |
|--|--|--|--|---|---|
| PUZA-080-36-40-K12<br>Ident No.: 0022513 | 80   | 36   | 12   | 40  | 180   |
| PUZA-100-40-40-K12<br>Ident No.: 0038440 | 100  | 40   | 12   | 40  | 280   |
| PUZA-125-40-50-K20<br>Ident No.: 0038441 | 125  | 40   | 20   | 50  | 350   |
| PUZA-160-50-60-K20<br>Ident No.: 0038442 | 160  | 50   | 20   | 60  | 500   |
| PUZA-200-50-60-K20<br>Ident No.: 0038443 | 200  | 50   | 20   | 60  | 700   |
| PUZA-250-60-60-K25<br>Ident No.: 0013016 | 250  | 60   | 25   | 60  | 800   |

Suitable castors can be found on pages 193, 207

Matching accessories can be found on page 432

# polyurethane // medium-weight housing IM // up to 700 kg

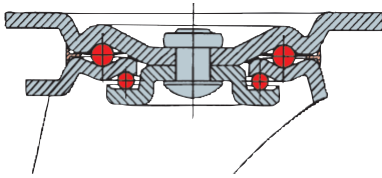

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                   | swivel castors with double brake     | fixed castors                  | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|----------------------------------|--------------------------------------|--------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-PUZA-080-K-3<br>ID: 0020232 | L-IM-PUZA-080-K-3-DSN<br>ID: 0020238 | B-IM-PUZA-080-K<br>ID: 0020244 | 80         | 36             | 108       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 180                       |
| L-IM-PUZA-100-K-3<br>ID: 0020233 | L-IM-PUZA-100-K-3-DSN<br>ID: 0020239 | B-IM-PUZA-100-K<br>ID: 0020245 | 100        | 40             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 280                       |
| L-IM-PUZA-125-K-3<br>ID: 0020234 | L-IM-PUZA-125-K-3-DSN<br>ID: 0020240 | B-IM-PUZA-125-K<br>ID: 0020246 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 350                       |
| L-IM-PUZA-160-K-3<br>ID: 0020235 | L-IM-PUZA-160-K-3-DSN<br>ID: 0020241 | B-IM-PUZA-160-K<br>ID: 0020247 | 160        | 50             | 200       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-PUZA-200-K-3<br>ID: 0020236 | L-IM-PUZA-200-K-3-DSN<br>ID: 0020242 | B-IM-PUZA-200-K<br>ID: 0020248 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-PUZA-250-K-3<br>ID: 0023356 | L-IM-PUZA-250-K-3-DSV<br>ID: 0023357 | B-IM-PUZA-250-K<br>ID: 0023358 | 250        | 60             | 297       | 67                           | 135 x 110     | 105 x 80        | 10.5      | 700                       |



3-DSV  
(plate+brake)



foot protection

Matching accessories can be found on page 432



**Features:**

- EPUA wheel series:
- die-cast aluminum wheel body with ball bearing
- tread surface made of molded polyurethane, 78° shore A

**Properties:**






- high load capacity
- low rolling resistance
- non-marking, runs quietly
- sturdy and shock-resistant
- absorbs vibration
- (old designation: EPA)

**floors**



*“Moves heavy weights elastically”*


**wheels**

|  |  wheel ø<br>mm |  wheel width<br>mm |  axle hole ø<br>mm |  hub length<br>mm |  load-carrying<br>capacity kg |
|--|---|---|---|--|--|
| EPUA-100-30-40-K12<br>Ident No.: 0016059 | 100   | 30  | 12  | 40   | 200  |
| EPUA-125-40-40-K15<br>Ident No.: 0016060 | 125   | 40  | 15  | 40   | 300  |
| EPUA-160-50-60-K20<br>Ident No.: 0016063 | 160   | 50  | 20  | 60   | 500  |
| EPUA-180-50-60-K20<br>Ident No.: 0016064 | 180   | 50  | 20  | 60   | 500  |
| EPUA-200-50-60-K20<br>Ident No.: 0016065 | 200   | 50  | 20  | 60   | 700  |
| EPUA-250-50-60-K20<br>Ident No.: 0037935 | 250   | 50  | 20  | 60   | 900  |

Suitable castors can be found on pages 195, 213, 214

Matching accessories can be found on page 432

# elastic polyurethane // medium-weight housing IM // up to 600 kg

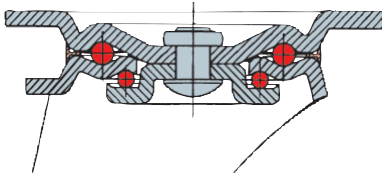

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                   | swivel castors with double brake     | fixed castors                  | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|----------------------------------|--------------------------------------|--------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-EPUA-100-K-3<br>ID: 0026818 | L-IM-EPUA-100-K-3-DSN<br>ID: 0026822 | B-IM-EPUA-100-K<br>ID: 0026826 | 100        | 30             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 200                       |
| L-IM-EPUA-125-K-3<br>ID: 0026819 | L-IM-EPUA-125-K-3-DSN<br>ID: 0026823 | B-IM-EPUA-125-K<br>ID: 0026827 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 300                       |
| L-IM-EPUA-160-K-3<br>ID: 0026820 | L-IM-EPUA-160-K-3-DSN<br>ID: 0026824 | B-IM-EPUA-160-K<br>ID: 0026828 | 160        | 50             | 200       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-EPUA-200-K-3<br>ID: 0026821 | L-IM-EPUA-200-K-3-DSN<br>ID: 0026825 | B-IM-EPUA-200-K<br>ID: 0026829 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 600                       |

Matching accessories can be found on page 432



### Features:

- PAM and PAH wheel series:
- polyamide 6 wheel body with ball bearing
- polyamide 6 can absorb and release moisture






### Properties:

- excellent chemical resistance
- high load capacity
- resistant to fracturing even at heavy loads
- long service life
- runs well on smooth floor surfaces
- low rolling resistance
- (old designation: POKS and 820)

### floors




### wheels

|   |  wheel ø<br>mm |  wheel width<br>mm |  axle hole ø<br>mm |  hub length<br>mm |  load-carrying<br>capacity kg |
|---|---|---|---|--|--|
| PAM-080-35-40-K12<br>Ident No.: 0015402 | 80  | 35  | 12  | 40   | 200  |
| PAM-100-35-40-K12<br>Ident No.: 0015403 | 100   | 35  | 12  | 40   | 300  |
| PAM-125-40-50-K15<br>Ident No.: 0015404 | 125   | 40  | 15  | 50   | 400  |
| PAM-150-45-60-K20<br>Ident No.: 0015405 | 150   | 45  | 20  | 60   | 700  |
| PAM-160-45-60-K20<br>Ident No.: 0015406 | 160   | 45  | 20  | 60   | 700  |
| PAM-200-50-60-K20<br>Ident No.: 0015407 | 200   | 50  | 20  | 60   | 1,000  |
| PAM-250-60-75-K25<br>Ident No.: 0016979 | 250   | 60  | 25  | 75   | 1,300  |

Suitable castors can be found on pages 197, 217, 219

Matching accessories can be found on page 432

# polyamide // medium-weight housing IM // up to 700 kg

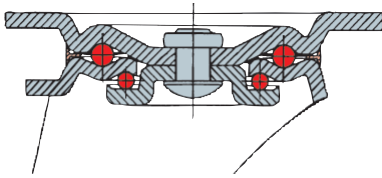

## Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



| swivel castors                  | swivel castors with double brake    | fixed castors                 | wheel ø mm | wheel width mm | height mm | projection, swivel castor mm | plate size mm | hole spacing mm | hole ø mm | load-carrying capacity kg |
|---------------------------------|-------------------------------------|-------------------------------|------------|----------------|-----------|------------------------------|---------------|-----------------|-----------|---------------------------|
| L-IM-PAM-080-K-3<br>ID: 0021071 | L-IM-PAM-080-K-3-DSN<br>ID: 0021077 | B-IM-PAM-080-K<br>ID: 0021083 | 80         | 35             | 108       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 200                       |
| L-IM-PAM-100-K-3<br>ID: 0021072 | L-IM-PAM-100-K-3-DSN<br>ID: 0021078 | B-IM-PAM-100-K<br>ID: 0021084 | 100        | 35             | 128       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 300                       |
| L-IM-PAM-125-K-3<br>ID: 0021073 | L-IM-PAM-125-K-3-DSN<br>ID: 0021079 | B-IM-PAM-125-K<br>ID: 0021085 | 125        | 40             | 155       | 40                           | 105 x 80      | 80 x 60         | 8.5       | 400                       |
| L-IM-PAM-150-K-3<br>ID: 0021074 | L-IM-PAM-150-K-3-DSN<br>ID: 0021080 | B-IM-PAM-150-K<br>ID: 0021086 | 150        | 45             | 195       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-PAM-200-K-3<br>ID: 0021075 | L-IM-PAM-200-K-3-DSN<br>ID: 0021081 | B-IM-PAM-200-K<br>ID: 0021087 | 200        | 50             | 245       | 56                           | 135 x 110     | 105 x 80        | 10.5      | 500                       |
| L-IM-PAM-250-K-3<br>ID: 0023349 | L-IM-PAM-250-K-3-DSV<br>ID: 0023352 | B-IM-PAM-250-K<br>ID: 0023355 | 250        | 60             | 297       | 67                           | 135 x 110     | 105 x 80        | 10.5      | 700                       |



3-DSV  
(plate+brake)

Matching accessories can be found on page 432