


thermoplastic electrically conductive // apparatus castors, lightweight AL // up to 65 kg



Features:


- castor series AL, thermoplastic, ball bearing: .
- lightweight, pressed steel sheet housing, galvanized
- fork head with double ball bearing
- wheels with thermoplastic tires and ball bearings

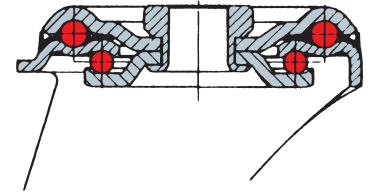


“Electrically conductive”



swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-AL-TPBK-050-K-1-EC ID: 0033649	L-AL-TPBK-050-K-1-DSN-EC ID: 0033650	50	19	71	21	10.2	40
L-AL-TPBK-075-K-1-EC ID: 0033654	L-AL-TPBK-075-K-1-DSN-EC ID: 0033655	75	23	101	25	10.2	50
L-AL-TPBK-100-K-1-EC ID: 0033666	L-AL-TPBK-100-K-1-DSN-EC ID: 0033667	100	25	122	32	10.2	65



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432