



thermoplastic electrically conductive // standard housing IS, IL // up to 110 kg

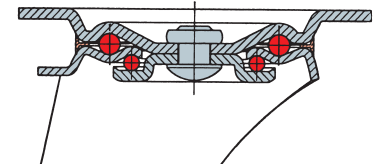

Features:


- castor series IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-TPBK-080-K-3-EC ID: 0034075	L-IL-TPBK-080-K-3-DSN-EC ID: 0034076	B-IL-TPBK-080-K-3-EC ID: 0034077	80	30	100	36	105 x 80	80 x 60	9	80
L-IL-TPBK-100-K-3-EC ID: 0034078	L-IL-TPBK-100-K-3-DSN-EC ID: 0034079	B-IL-TPBK-100-K-3-EC ID: 0034080	100	30	125	36	105 x 80	80 x 60	9	90
L-IL-TPBK-125-K-3-EC ID: 0034081	L-IL-TPBK-125-K-3-DSN-EC ID: 0034082	B-IL-TPBK-125-K-3-EC ID: 0034083	125	35	155	36	105 x 80	80 x 60	9	110



-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432