








thermoplastic electrically conductive // standard housing IS, IL // up to 110 kg

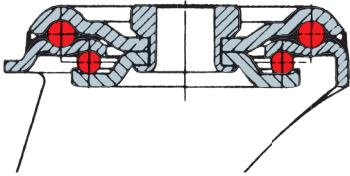

Features:

- castor series IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IL-TPBK-080-K-1-EC ID: 0035805	L-IL-TPBK-080-K-1-DSN-EC ID: 0035806	80	30	100	36	12	80
L-IL-TPBK-100-K-1-EC ID: 0036881	L-IL-TPBK-100-K-1-DSN-EC ID: 0036882	100	30	125	36	12	90
L-IL-TPBK-125-K-1-EC ID: 0035807	L-IL-TPBK-125-K-1-DSN-EC ID: 0035808	125	35	155	36	12	110



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432