


solid rubber electrically conductive // standard housing IS, IL // up to 295 kg



Features:

- castor series IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

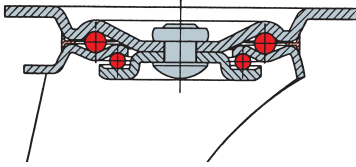

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-SGS-080-R-3-EC ID: 0030211	L-IS-SGS-080-R-3-DSN-EC ID: 0030217	B-IL-SGS-080-R-EC ID: 0030223	80	30	100	36	105 x 80	80 x 60	9	50
L-IL-SGS-100-R-3-EC ID: 0030212	L-IS-SGS-100-R-3-DSN-EC ID: 0030218	B-IL-SGS-100-R-EC ID: 0030224	100	30	125	36	105 x 80	80 x 60	9	70
L-IL-SGS-125-R-3-EC ID: 0030213	L-IS-SGS-125-R-3-DSN-EC ID: 0030219	B-IL-SGS-125-R-EC ID: 0030225	125	38	155	36	105 x 80	80 x 60	9	100
L-IS-SGS-125-R-3-EC-GP ID: 0037863	L-IS-SGS-125-R-3-DSN-EC-GP ID: 0040378	B-IS-SGS-125-R-EC-GP ID: 0037864	125	38	155	48	135 x 110	105 x 80	11	100
L-IL-SGS-160-R-3-EC ID: 0030214	L-IS-SGS-160-R-3-DSN-EC ID: 0030220	B-IL-SGS-160-R-EC ID: 0030226	160	40	190	52	135 x 110	105 x 80	11	135
L-IL-SGS-200-R-3-EC ID: 0030215	L-IS-SGS-200-R-3-DSN-EC ID: 0030221	B-IL-SGS-200-R-EC ID: 0030227	200	50	235	54	135 x 110	105 x 80	11	205
L-IS-SGS-250-R-3-EC ID: 0030216	L-IS-SGS-250-R-3-DSV-EC ID: 0030222	B-IS-SGS-250-R-EC ID: 0030228	250	60	290	66	135 x 110	105 x 80	11	295



-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432