


polyamide electrically conductive // standard housing IS, IL // up to 350 kg



Features:

- castor series IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

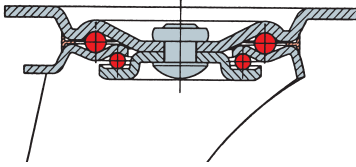

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PALK-080-R-3-EC ID: 0030196	L-IL-PALK-080-R-3-DSN-EC ID: 0030201	B-IL-PALK-080-R-3-EC ID: 0030206	80	35	100	36	105 x 80	80 x 60	9	150
L-IL-PALK-100-R-3-EC ID: 0030197	L-IL-PALK-100-R-3-DSN-EC ID: 0030202	B-IL-PALK-100-R-3-EC ID: 0030207	100	35	125	36	105 x 80	80 x 60	9	150
L-IL-PALK-125-R-3-EC ID: 0030198	L-IL-PALK-125-R-3-DSN-EC ID: 0030203	B-IL-PALK-125-R-3-EC ID: 0030208	125	35	155	37	105 x 80	80 x 60	9	200
L-IL-PALK-150-R-3-EC ID: 0030199	L-IL-PALK-150-R-3-DSN-EC ID: 0030204	B-IL-PALK-150-R-3-EC ID: 0030209	150	45	185	52	135 x 110	105 x 80	11	300
L-IL-PALK-200-R-3-EC ID: 0030200	L-IL-PALK-200-R-3-DSN-EC ID: 0030205	B-IL-PALK-200-R-3-EC ID: 0030210	200	50	235	53	135 x 110	105 x 80	11	350



-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432