


polyamide electrically conductive // stainless steel standard series IV // up to 270 kg



Features:


- castor series IV:
- standard stainless steel housing
- fork head with double ball bearing
- all mounted parts are resistant to rust and acid
- (old designation: RFL/...)

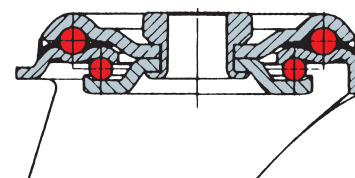

swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IV-PALK-080-R-1-EC ID: 0033959	L-IV-PALK-080-R-1-DSN-EC ID: 0030938	80	35	108	32	12	130
L-IV-PALK-100-R-1-EC ID: 0040475	L-IV-PALK-100-R-1-DSN-EC ID: 0034151	100		128		12	130
L-IV-PALK-125-R-1-EC ID: 0035191	L-IV-PALK-125-R-1-DSN-EC ID: 0035192	125	37	128	32	12	130
L-IV-PALK-150-R-1-EC ID: 0040476	L-IV-PALK-150-R-1-DSN-EC ID: 0040479	150	45	195	49	12	270
L-IV-PALK-200-R-1-EC ID: 0040477	L-IV-PALK-200-R-1-DSN-EC ID: 0040482	200	50	245	49	12	270



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432