


polypropylene // standard housing IS, IL // up to 350 kg



Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

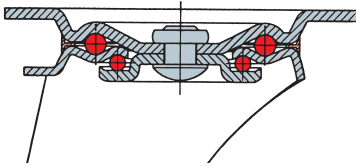

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PPBL-080-K-3 ID: 0029440	L-IL-PPBL-080-K-3-DSN ID: 0029445	B-IL-PPBL-080-K ID: 0029450	80	30	100	36	105 x 80	80 x 60	9	150
L-IL-PPBL-100-K-3 ID: 0029441	L-IL-PPBL-100-K-3-DSN ID: 0029446	B-IL-PPBL-100-K ID: 0029451	100	30	125	36	105 x 80	80 x 60	9	180
L-IL-PPBL-125-K-3 ID: 0029442	L-IL-PPBL-125-K-3-DSN ID: 0029447	B-IL-PPBL-125-K ID: 0029452	125	35	155	36	105 x 80	80 x 60	9	210
L-IL-PPBL-160-K-3 ID: 0029443	L-IL-PPBL-160-K-3-DSN ID: 0029448	B-IL-PPBL-160-K ID: 0029453	160	40	190	52	135 x 110	105 x 80	11	300
L-IL-PPBL-200-K-3 ID: 0029444	L-IL-PPBL-200-K-3-DSN ID: 0029449	B-IL-PPBL-200-K ID: 0029454	200	47	235	54	135 x 110	105 x 80	11	350



-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432