


polyurethane // standard housing IS, IL // up to 300 kg



Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

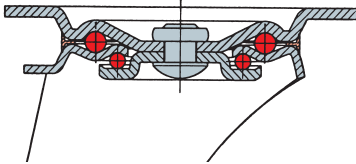

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-PUBK-080-K-3 ID: 0029465	L-IL-PUBK-080-K-3-DSN ID: 0029470	B-IL-PUBK-080-K ID: 0029475	80	30	100	36	105 x 80	80 x 60	9	100
L-IL-PUBK-100-K-3 ID: 0029466	L-IL-PUBK-100-K-3-DSN ID: 0029471	B-IL-PUBK-100-K ID: 0029476	100	30	125	36	105 x 80	80 x 60	9	150
L-IL-PUBK-125-K-3 ID: 0029467	L-IL-PUBK-125-K-3-DSN ID: 0029472	B-IL-PUBK-125-K ID: 0029477	125	35	155	36	105 x 80	80 x 60	9	200
L-IL-PUBK-160-K-3 ID: 0029468	L-IL-PUBK-160-K-3-DSN ID: 0029473	B-IL-PUBK-160-K ID: 0029478	160	40	190	52	135 x 110	105 x 80	11	250
L-IL-PUBK-200-K-3 ID: 0029469	L-IL-PUBK-200-K-3-DSN ID: 0029474	B-IL-PUBK-200-K ID: 0029479	200	47	235	54	135 x 110	105 x 80	11	300



-1 (bolt hole)



foot protection



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432