



### Features:


- EGG ball bearing wheels:
- high-quality elastic solid rubber tires on cast iron rims
- (for small series and large wheel diameter with steel rim)
- tires: 65° shore A
- bearing type: 2 pressed-in ball bearings






### Properties:

- runs quietly
- sturdy and shock-resistant
- absorbs vibration
- (old designation: ET series)

### floors



 **"Please request the minimum order quantity"**

wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
EGG-125-50-60-K20 Ident No.: 0016099	125	50	20	60	225
EGG-150-50-60-K20 Ident No.: 0016100	150	50	20	60	250
EGG-160-50-60-K20 Ident No.: 0016101	160	50	20	60	300
EGG-180-50-60-K20 Ident No.: 0016103	180	50	20	60	325
EGG-200-50-60-K20 Ident No.: 0016107	200	50	20	60	350
EGG-200-50-60-K25 Ident No.: 0016109	200	50	25	60	350
EGG-200-75-90-K25 Ident No.: 0016110	200	75	25	90	500
EGG-200-80-80-K25 Ident No.: 0033600	200	80	25	80	550
EGG-230-50-60-K30 Ident No.: 0016120	230	50	30	60	400
EGG-250-50-60-K25 Ident No.: 0016124	250	50	25	60	450
EGG-250-60-60-K25 Ident No.: 0016125	250	60	25	60	525
EGG-250-80-80-K30 Ident No.: 0038485	250	80	30	80	700
EGG-250-80-85-K30 Ident No.: 0016128	250	80	30	85	675
EGG-250-100-100-K25 Ident No.: 0036139	250	100	25	100	1.350
EGG-280-75-85-K30 Ident No.: 0016235	280	75	30	85	725
EGG-300-75-90-K30 Ident No.: 0016243	300	75	30	90	750



wheels	wheel ø mm	wheel width mm	axle hole ø mm	hub length mm	load-carrying capacity kg
EGG-300-75-90-K35 Ident No.: 0016244	300	75	35	90	750
EGG-300-85-90-K30 Ident No.: 0016246	300	85	30	90	675
EGG-360-60-65-K35 Ident No.: 0032385	360	60	35	65	750
EGG-360-60-75-K30 Ident No.: 0016251	360	60	30	75	750
EGG-360-75-85-K30 Ident No.: 0016252	360	75	30	85	950
EGG-360-75-85-K35 Ident No.: 0016253	360	75	35	85	950
EGG-400-75-90-K35 Ident No.: 0016261	400	75	35	90	1,000
EGG-405-130-140-K40 Ident No.: 0016263	405	130	40	140	1,500
EGG-405-130-140-K50 Ident No.: 0016262	405	130	50	140	1,500
EGG-415-90-75-K30 Ident No.: 0038970	415	90	30	75	1,000
EGG-415-100-120-K40 Ident No.: 0016265	415	100	40	120	1,250
EGG-425-150-160-K40 Ident No.: 0016269	425	150	40	160	1,800
EGG-500-85-90-K40 Ident No.: 0016274	500	85	40	90	1,300
EGG-520-100-120-K40 Ident No.: 0016276	520	100	40	120	1,525
EGG-610-150-160-K50 Ident No.: 0016281	610	150	50	160	2,250

Matching accessories can be found on page 432

**floors**




**Features:**

- PUZG plain bearing wheels:
- wheel body made of special grey cast iron with plain bearing
- tread made of polyurethane, molded, approx. 95° shore A, strong hub with core hole

**Properties:**

- high load capacity
- low abrasion, non-marking, shock-resistant
- low rolling resistance
- excellent chemical resistance, oil and grease resistance
- resistant to cutting by metal chips
- (old designation: series 4)



wheels	wheel ø mm	wheel width mm	axle hole ø mm	hub length mm	load-carrying capacity kg
PUZG-080-36-36-G15 Ident No.: 0038580	80	36	15	36	250
PUZG-100-30-36-G15 Ident No.: 0011978	100	30	15	36	250
PUZG-125-35-47-G15 Ident No.: 0011982	125	35	15	47	330
PUZG-150-40-47-G20 Ident No.: 0011987	150	40	20	47	500
PUZG-160-40-59-G20 Ident No.: 0035342	160	40	20	59	750
PUZG-200-50-52-G20 Ident No.: 0011993	200	50	20	52	1,000
PUZG-250-50-65-G25 Ident No.: 0011999	250	50	25	65	1,400
PUZG-250-60-65-G25 Ident No.: 0012010	250	60	25	65	1,400
PUZG-300-70-70-G25 Ident No.: 0012017	300	70	25	70	2,100
PUZG-300-100-100-G45 Ident No.: 0030732	300	100	45	100	2.500



**Features:**






- PUZG wheels:
- wheel body made of special grey cast iron with ball bearing
- tread made of molded polyurethane, approx. 95° shore A

**Properties:**






- high load capacity
- low abrasion, non-marking, shock-resistant
- low rolling resistance
- excellent chemical resistance
- resistant to oil and grease
- resistant to cutting by metal chips
- (old designation: series 4)






**floors**



wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUZG-080-36-36-K15 Ident No.: 0011972	80	36	15	36	250
PUZG-100-30-36-K15 Ident No.: 0011975	100	30	15	36	250
PUZG-100-40-40-K15 Ident No.: 0033355	100	40	15	40	350
PUZG-100-40-45-K20 Ident No.: 0037450	100	40	20	45	350
PUZG-100-40-47-K15 Ident No.: 0011979	100	40	15	47	350
PUZG-100-40-47-K20 Ident No.: 0011977	100	40	20	47	350
PUZG-100-50-60-K20 Ident No.: 0015910	100	50	20	60	450
PUZG-125-35-47-K15 Ident No.: 0011980	125	35	15	47	300
PUZG-125-40-47-K15 Ident No.: 0011983	125	40	15	47	350
PUZG-125-40-50-K20 Ident No.: 0032321	125	40	20	50	360
PUZG-125-50-50-K20 Ident No.: 0037349	125	50	20	50	400
PUZG-125-50-60-K20 Ident No.: 0038444	125	50	20	60	550
PUZG-150-40-40-K20 Ident No.: 0011986	150	40	20	40	700
PUZG-150-40-47-K20 Ident No.: 0011984	150	40	20	47	500
PUZG-150-50-50-K25 Ident No.: 0011989	150	50	25	50	700
PUZG-150-50-60-K20 Ident No.: 0039227	150	50	20	60	700

Suitable castors can be found on pages 210, 231, 232, 243

wheels					
	wheel ø mm	wheel width mm	axle hole ø mm	hub length mm	load-carrying capacity kg
PUZG-150-50-60-K25 Ident No.: 0017883	150	50	25	60	700
PUZG-150-60-65-K25 Ident No.: 0011988	150	60	25	65	930
PUZG-160-40-58-K20 Ident No.: 0036892	160	40	20	58	700
PUZG-160-50-50-K30 Ident No.: 0037451	160	50	30	50	800
PUZG-160-50-60-K20 Ident No.: 0038291	160	50	20	60	800
PUZG-175-40-52-K20 Ident No.: 0034537	175	40	20	52	720
PUZG-200-50-50-K25 Ident No.: 0030961	200	50	25	50	900
PUZG-200-50-52-K30 Ident No.: 0031655	200	50	30	52	1,000
PUZG-200-50-60-K25 Ident No.: 0037762	200	50	25	60	1,000
PUZG-200-50-60-K30 Ident No.: 0037162	200	50	30	60	1,000
PUZG-200-60-65-K25 Ident No.: 0011996	200	60	25	65	1,200
PUZG-200-80-80-K30 Ident No.: 0032256	200	80	30	80	1,500
PUZG-200-80-80-K35 Ident No.: 0011997	200	80	35	80	1,500
PUZG-225-50-50-K25 Ident No.: 0036084	225	50	25	50	1,000
PUZG-250-50-60-K25 Ident No.: 0038445	250	50	25	60	1,200
PUZG-250-50-60-K30 Ident No.: 0033351	250	50	30	60	1,200
PUZG-250-60-60-K30 Ident No.: 0038221	250	60	30	60	1,400
PUZG-250-60-60-K25 Ident No.: 0039228	250	60	25	60	1,400
PUZG-250-60-65-K25 Ident No.: 0039229	250	60	25	65	1,400
PUZG-250-80-80-K30 Ident No.: 0032287	250	80	30	80	1,800
PUZG-250-80-80-K35 Ident No.: 0039230	250	80	35	80	1,800
PUZG-250-80-90-K30 Ident No.: 0039200	250	80	30	90	1,800
PUZG-250-100-85-K30 Ident No.: 0027527	250	100	30	85	1,800
PUZG-250-100-100-K35 Ident No.: 0012014	250	100	35	100	2,200
PUZG-300-70-70-K30 Ident No.: 0012019	300	70	30	70	2,200
PUZG-300-80-80-K30 Ident No.: 0012995	300	80	30	80	2,200
PUZG-300-80-80-K35 Ident No.: 0012016	300	80	35	80	2,200
PUZG-300-100-100-K35 Ident No.: 0031516	300	100	35	100	3,000

wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUZG-300-100-100-K40 Ident No.: 0012020	300	100	40	100	3,000
PUZG-350-100-100-K40 Ident No.: 0036543	350	100	40	100	3,500
PUZG-350-100-100-K50 Ident No.: 0012021	350	100	50	100	3,500
PUZG-400-60-75-K35 Ident No.: 0040417	400	60	35	75	2,300
PUZG-400-80-80-K40 Ident No.: 0036649	400	80	40	80	3,300
PUZG-400-80-85-K40 Ident No.: 0039746	400	80	40	85	3,300
PUZG-400-80-90-K40 Ident No.: 0036988	400	80	40	90	3,300
PUZG-400-100-100-K40 Ident No.: 0032566	400	100	40	100	3,800
PUZG-400-100-100-K45 Ident No.: 0031204	400	100	45	100	3,800
PUZG-400-100-100-K50 Ident No.: 0012022	400	100	50	100	3,800
PUZG-400-100-100-K60 Ident No.: 0031206	400	100	60	100	3,500
PUZG-450-100-100-K50 Ident No.: 0032981	450	100	50	100	4,000
PUZG-500-100-100-K50 Ident No.: 0012023	500	100	50	100	4,500



**Features:**






- GGG wheels:
- made of special grey cast iron with plain bearing
- cleanly cast, de-burred and painted

**Properties:**

- high load capacity
- durable
- extremely temperature resistant
- high elongation at breakage
- low rolling resistance
- excellent chemical resistance
- (old designation: 101-plain bearing)

**floors**



wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
GGG-065-30-34-G07-blue Ident No.: 0010063	65	30	7	34	150
GGG-080-35-39-G10-blue Ident No.: 0010065	80	35	10	39	250
GGG-100-35-44-G12-blue Ident No.: 0010069	100	35	12	44	350
GGG-125-35-49-G12-blue Ident No.: 0010074	125	35	12	49	450
GGG-150-50-58-G15-blue Ident No.: 0010081	150	50	15	58	650
GGG-160-50-58-G15-blue Ident No.: 0010084	160	50	15	58	700
GGG-200-50-58-G20-blue Ident No.: 0010086	200	50	20	58	1,000
GGG-250-60-65-G25-blue Ident No.: 0010091	250	60	25	65	1,250

Suitable castors can be found on page 221

Matching accessories can be found on page 432

## floors






## Features:

- GGK wheels:
- made of special grey cast iron with ball bearing
- cleanly cast, de-burred and painted

## Properties:

- high load capacity
- durable
- extremely temperature resistant
- high elongation at breakage
- low rolling resistance
- excellent chemical resistance
- (old designation: 101-ball bearing)



wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
GGK-100-30-30-K15 Ident No.: 0010071	100	30	15	30	300
GGK-125-32-32-K15 Ident No.: 0010075	125	32	15	32	400
GGK-150-45-60-K20 Ident No.: 0039225	150	45	20	60	600
GGK-200-48-48-K20 Ident No.: 0036835	200	48	20	48	1,000
GGK-200-45-60-K25 Ident No.: 0039226	200	45	25	60	1,000
GGK-200-48-48-K25 Ident No.: 0010087	200	48	25	48	1,000
GGK-250-60-67-K20 Ident No.: 0032128	250	60	20	67	1,250
GGK-250-60-67-K25 Ident No.: 0032850	250	60	25	67	1,250

Suitable castors can be found on page 223

Matching accessories can be found on page 432





**Features:**






- GGG wheel series:
- made of special grey cast iron with plain bearing
- cleanly cast, de-burred and painted

**Properties:**

- high load capacity
- durable
- extremely temperature resistant
- high elongation at breakage
- low rolling resistance
- excellent chemical resistance
- (old designation: 101-plain bearing)


**floors**



wheels	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
GGG-065-30-34-G07-blue Ident No.: 0010063	65	30	7	34	150
GGG-080-35-39-G10-blue Ident No.: 0010065	80	35	10	39	250
GGG-100-35-44-G12-blue Ident No.: 0010069	100	35	12	44	350
GGG-125-35-49-G12-blue Ident No.: 0010074	125	35	12	49	450
GGG-150-50-58-G15-blue Ident No.: 0010081	150	50	15	58	650
GGG-160-50-58-G15-blue Ident No.: 0010084	160	50	15	58	700
GGG-200-50-58-G20-blue Ident No.: 0010086	200	50	20	58	1,000
GGG-250-60-65-G25-blue Ident No.: 0010091	250	60	25	65	1,250

Matching accessories can be found on page 432

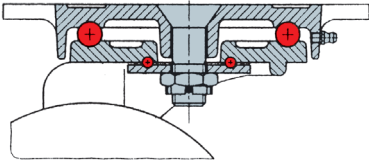







# cast iron // malleable cast castors CI // up to 1,250 kg



## Features:

- castor series CI:
- made of high-quality malleable cast iron, painted
- heat resistant: up to +180° C
- fork head with double ball bearing
- very tough and excellent resistance to fracturing
- housing can be lubricated
- (old designation: series 1 and 3)



								
	wheel ø mm	wheel width mm	height mm	projection, swivel ca- stor mm	plate size mm	hole spacing mm	hole ø mm	load- carrying capacity kg

swivel castors	fixed castors								
L-CI-GGG-080-G-3 ID: 0010017	B-CI-GGG-080-G ID: 0011585	80	35	110	30	115 x 80	90 x 55	8	250
L-CI-GGG-100-G-3 ID: 0010018	B-CI-GGG-100-G ID: 0011587	100	35	135	35	145 x 100	115 x 70	10	350
L-CI-GGG-125-G-3 ID: 0010019	B-CI-GGG-125-G ID: 0011588	125	35	162	40	155 x 105	125 x 75	10	450
L-CI-GGG-150-G-3 ID: 0010020	B-CI-GGG-150-G ID: 0011590	150	50	200	50	175 x 125	145 x 95	10	650
L-CI-GGG-200-G-3 ID: 0010022	B-CI-GGG-200-G ID: 0011591	200	50	260	60	225 x 145	184 x 104	14	1,000
L-CI-GGG-250-G-3 ID: 0010024	B-CI-GGG-250-G ID: 0011592	250	60	320	62	225 x 145	185 x 105	14	1,250

Matching accessories can be found on page 432




**Features:**

- GGK wheel series:
- made of special grey cast iron with ball bearing
- cleanly cast, de-burred and painted






**Properties:**

- high load capacity
- durable
- extremely temperature resistant
- high elongation at breakage
- low rolling resistance
- excellent chemical resistance
- (old designation: 101-ball bearing)

**floors**




**wheels**

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
GGK-100-30-30-K15 Ident No.: 0010071	100	30	15	30	300
GGK-125-32-32-K15 Ident No.: 0010075	125	32	15	32	400
GGK-150-45-60-K20 Ident No.: 0039225	150	45	20	60	600
GGK-200-45-60-K25 Ident No.: 0039226	200	45	25	60	1,000
GGK-250-60-67-K25 Ident No.: 0032850	250	60	25	67	1,250

Matching accessories can be found on page 432

# cast iron // heavy housing IH // up to 1,000 kg

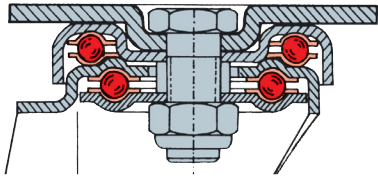

## Features:

- castor series IH:
- heavy steel plate housing, galvanized
- fork head with double ball bearing and hardened bearing shells
- extra resistant to shock and impact
- (old designation: LM)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IH-GGK-100-K-3 ID: 0018934	L-IH-GGK-100-K-3-DSV ID: 0018935	B-IH-GGK-100-K ID: 0015283	100	30	135	36	100 x 80	80 x 60	8.5	300
L-IH-GGK-125-K-3 ID: 0018937	L-IH-GGK-125-K-3-DSV ID: 0018938	B-IH-GGK-125-K ID: 0015285	125	32	170	45	135 x 110	105 x 80	12.5	400
L-IH-GGK-150-K-3 ID: 0018939	L-IH-GGK-150-K-3-DSV ID: 0018940	B-IH-GGK-150-K ID: 0015286	150	38	200	45	135 x 110	105 x 80	12.5	600
L-IH-GGK-200-K-3 ID: 0039898	L-IH-GGK-200-K-3-DSV ID: 0039899	B-IH-GGK-200-K ID: 0039900	200	48	245	57	135 x 110	105 x 80	12.5	1,000



with foot protection

Matching accessories can be found on page 432



**Features:**

- PUZG wheel series:
- wheel body made of special grey cast iron with ball bearing
- tread made of molded polyurethane, approx. 95° shore A






**Properties:**

- high load capacity
- low abrasion, non-marking, shock-resistant
- low rolling resistance
- excellent chemical resistance
- resistant to oil and grease
- resistant to cutting by metal chips
- (old designation: series 4)

**floors**




**wheels**

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUHS-070-70-K20 Ident No.: 0035600	70	70	20	70	470
PUZG-080-36-36-K15 Ident No.: 0011972	80	36	15	36	250
PUHS-085-70-K20 Ident No.: 0012395	85	70	20	70	550
PUZG-100-40-47-K15 Ident No.: 0011979	100	40	15	47	350
PUZG-100-50-60-K20 Ident No.: 0015910	100	50	20	60	450
PUZG-125-40-47-K15 Ident No.: 0011983	125	40	15	47	350
PUZG-125-50-60-K20 Ident No.: 0038444	125	50	20	60	550
PUZG-150-50-60-K20 Ident No.: 0039227	150	50	20	60	700
PUZG-200-50-60-K25 Ident No.: 0037762	200	50	25	60	1,000
PUZG-200-80-80-K35 Ident No.: 0011997	200	80	35	80	1,500
PUZG-250-50-60-K25 Ident No.: 0038445	250	50	25	60	1,200
PUZG-250-80-80-K35 Ident No.: 0039230	250	80	35	80	1,800
PUZG-300-80-80-K30 Ident No.: 0012995	300	80	30	80	2,200

Suitable castors can be found on pages 231, 232, 243

Matching accessories can be found on page 432

# polyurethane // heavy-duty series HB // up to 350 kg

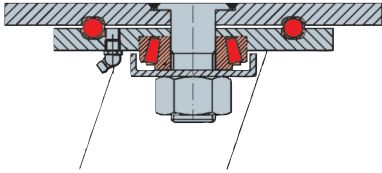

## Features:


- castor series HB:
- heavy welded steel construction, galvanized
- fork head with hardened bearing shells and tapered roller bearing, can be lubricated
- center pin screwed and secured
- (old designation: LP)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-HL-PUZG-080-K-3 ID: 0017941	L-HL-PUZG-080-K-3-DSV ID: 0017944	B-HL-PUZG-080-K ID: 0017947	80	36	125	30	105 x 80	80 x 60	9	250
L-HL-PUZG-100-K-3 ID: 0017942	L-HL-PUZG-100-K-3-DSV ID: 0017945	B-HL-PUZG-100-K ID: 0017948	100	40	135	30	105 x 80	80 x 60	9	300
L-HL-PUZG-125-K-3 ID: 0017943	L-HL-PUZG-125-K-3-DSV ID: 0017946	B-HL-PUZG-125-K ID: 0017949	125	40	160	32	105 x 80	80 x 60	9	350

Matching accessories can be found on page 432

# polyurethane // heavy-duty series HB // up to 2,100 kg



## Features:

- castor series HL and HB:
- heavy welded steel construction, galvanized
- fork head with hardened bearing shells and tapered roller bearing, can be lubricated
- center pin screwed and secured
- (old designation: LP)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-HN-PUHS-070-K-3 ID: 0012675		B-HN-PUHS-070-K ID: 0012666	70	70	127	60	135 x 110	105 x 80	13	470
L-HN-PUHS-085-K-3 ID: 0012680		B-HN-PUHS-085-K ID: 0012671	85	70	135	60	135 x 110	105 x 80	13	550
L-HB-PUZG-100-K-3 ID: 0010117	L-HB-PUZG-100-K-3-DSV ID: 0010124	B-HB-PUZG-100-K ID: 0010131	100	50	150	35	135 x 110	105 x 80	11	450
L-HB-PUZG-125-K-3 ID: 0010118	L-HB-PUZG-125-K-3-DSV ID: 0010125	B-HB-PUZG-125-K ID: 0010132	125	50	170	50	135 x 110	105 x 80	11	550
L-HB-PUZG-150-K-3 ID: 0010119	L-HB-PUZG-150-K-3-DSV ID: 0010126	B-HB-PUZG-150-K ID: 0010133	150	50	200	55	135 x 110	105 x 80	11	700
L-HB-PUZG-200-K-3 ID: 0010120	L-HB-PUZG-200-K-3-DSV ID: 0010127	B-HB-PUZG-200-K ID: 0010134	200	50	245	60	135 x 110	105 x 80	11	1,000
L-HB-PUZG-200-K-3-B80 ID: 0039427	L-HB-PUZG-200-K-3-DSV-B80 ID: 0015925	B-HB-PUZG-200-K-B80 ID: 0038136	200	80	255	70	175 x 140	140 x 105	15	1,500
L-HB-PUZG-250-K-3 ID: 0010121	L-HB-PUZG-250-K-3-DSV ID: 0010128	B-HB-PUZG-250-K ID: 0010135	250	50	295	70	135 x 110	105 x 80	11	1,200
L-HB-PUZG-250-K-3-B60 ID: 0011396	L-HB-PUZG-250-K-3-DSV-B60 ID: 0017798	B-HB-PUZG-250-K-B60 ID: 0011397	250	60	305	70	175 x 140	140 x 105	15	1,400
L-HB-PUZG-250-K-3-B80 ID: 0010122	L-HB-PUZG-250-K-3-DSV-B80 ID: 0010129	B-HB-PUZG-250-K-B80 ID: 0010136	250	80	305	70	175 x 140	140 x 105	15	1,800
L-HB-PUZG-300-K-3 ID: 0010123	L-HB-PUZG-300-K-3-DSV ID: 0010130	B-HB-PUZG-250-K-B80 ID: 0010137	300	80	355	75	175 x 140	140 x 105	15	2,100

Matching accessories can be found on page 432



wide variety

**Features:**

- PUZG wheel series:
- wheel body made of special grey cast iron with ball bearing
- tread made of molded polyurethane, approx. 95° shore A






**Properties:**

- high load capacity
- low abrasion, non-marking, shock-resistant
- low rolling resistance
- excellent chemical resistance
- resistant to oil and grease
- resistant to cutting by metal chips
- (old designation: Series 4)

**floors**




**wheels**

	 wheel ø mm	 wheel width mm	 axle hole ø mm	 hub length mm	 load-carrying capacity kg
PUZG-125-35-47-K15 Ident No.: 0011980	125	35	15	47	300
PUZG-150-40-40-K20 Ident No.: 0011986	150	40	20	40	700
PUZG-200-50-60-K25 Ident No.: 0037762	200	50	25	60	1,000
PUZG-250-60-60-K25 Ident No.: 0039228	250	60	25	60	1,400
PUZG-300-70-70-K30 Ident No.: 0012019	300	70	30	70	2,200

Matching accessories can be found on page 432











# polyurethane // heavy-duty double castors HD // up to 4,000 kg



## Features:

- castor series HD:
- heavy welded steel construction, painted black
- fork head with sealed axial rib ball bearing
- and partially tapered roller bearing, can be lubricated
- (old designation: DLR)



								
	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg

swivel castors	fixed castors								
L-HD-PUZG-125-K-3 ID: 0015670	B-HD-PUZG-125-K ID: 0015634	125	35	177	50	175 x 140	140 x 105	13	500
L-HD-PUZG-150-K-3 ID: 0015680	B-HD-PUZG-150-K ID: 0015653	150	40	210	60	170 x 170	130 x 130	13	1,000
L-HD-PUZG-200-K-3 ID: 0015681	B-HD-PUZG-200-K ID: 0015654	200	50	270	70	200 x 200	160 x 160	17	2,200
L-HD-PUZG-250-K-3 ID: 0015682	B-HD-PUZG-250-K ID: 0015655	250	60	320	80	230 x 230	190 x 190	19	2,800
L-HD-PUZG-300-K-3 ID: 0015684	B-HD-PUZG-300-K ID: 0015656	300	70	375	85	230 x 230	190 x 190	19	4,000

Matching accessories can be found on page 432