


**thermoplastic** // standard housing IS, IL // up to 220 kg



**Features:**

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)

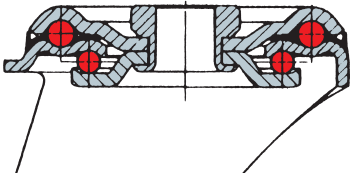

swivel castors	swivel castors with double brake	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	bolt hole ø mm	load-carrying capacity kg
L-IL-TPBK-080-K-1 ID: 0029505	L-IL-TPBK-080-K-1-DSN ID: 0029510	80	30	100	36	12	80
L-IL-TPBK-100-K-1 ID: 0029506	L-IL-TPBK-100-K-1-DSN ID: 0029511	100	30	125	38	12	90
L-IL-TPBK-125-K-1 ID: 0029507	L-IL-TPBK-125-K-1-DSN ID: 0029512	125	35	155	38	12	110
L-IL-TPBK-160-K-1 ID: 0029508	L-IL-TPBK-160-K-1-DSN ID: 0029513	160	40	190	52	12	180
L-IL-TPBK-200-K-1 ID: 0029509	L-IL-TPBK-200-K-1-DSN ID: 0029514	200	47	235	54	12	220



**“Bolt hole 12 or 16 mm is optionally available for wheel diameters 160 and 200 mm”**

Matching accessories can be found on page 432