








solid rubber // standard housing IS, IL // up to 205 kg

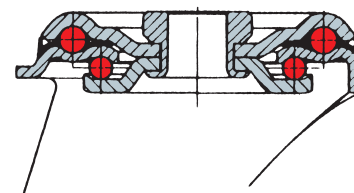


Features:


- castor series IS, IL:
- standard steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)



swivel castors	swivel castors with double brake	 wheel ø mm	 wheel width mm	 height mm	 projection, swivel castor mm	 bolt hole ø mm	 load-carrying capacity kg
L-IS-SGS-080-R-1 ID: 0030271	L-IS-SGS-080-R-1-DSN ID: 0030276	80	25	99	36	12	50
L-IS-SGS-100-R-1 ID: 0030272	L-IS-SGS-100-R-1-DSN ID: 0030277	100	30	124	38	12	70
L-IS-SGS-125-R-1 ID: 0030273	L-IS-SGS-125-R-1-DSN ID: 0030278	125	38	154	38	12	100
L-IS-SGS-160-R-1 ID: 0030274	L-IS-SGS-160-R-1-DSN ID: 0030279	160	40	190	52	12	135
L-IS-SGS-200-R-1 ID: 0030275	L-IS-SGS-200-R-1-DSN ID: 0030280	200	50	235	54	12	205



-3 (plate)



3-DSN (plate+ double brake)

Matching accessories can be found on page 432