


elastic rubber // standard housing IS, IL // up to 350 kg




Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

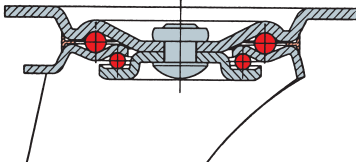


swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-EGK-080-R-3 ID: 0029181	L-IL-EGK-080-R-3-DSN ID: 0029186	B-IL-EGK-080-R ID: 0029641	80	35	100	36	105 x 80	80 x 60	9	100
L-IL-EGK-100-R-3 ID: 0029182	L-IL-EGK-100-R-3-DSN ID: 0029187	B-IL-EGK-100-R ID: 0029642	100	36	125	36	105 x 80	80 x 60	9	125
L-IK-EGK-100-R-3-GP ID: 0039073	L-IK-EGK-100-R-3-DSN-GP ID: 0039074	B-IK-EGK-100-R-GP ID: 0039075	100	36	128	46	135 x 110	105 x 80	11	200
L-IL-EGK-125-R-3 ID: 0029183	L-IL-EGK-125-R-3-DSN ID: 0029188	B-IL-EGK-125-R ID: 0029643	125	36	155	36	105 x 80	80 x 60	9	200
L-IK-EGK-125-R-3-GP ID: 0039952	L-IK-EGK-125-R-3-DSN-GP ID: 0039951	B-IK-EGK-125-R-GP ID: 0035488	125	36	155	48	135 x 110	105 x 80	11	200
L-IL-EGK-160-R-3 ID: 0029184	L-IL-EGK-160-R-3-DSN ID: 0029189	B-IL-EGK-160-R ID: 0029644	160	48	190	52	135 x 110	105 x 80	11	300
L-IL-EGK-200-R-3 ID: 0029185	L-IL-EGK-200-R-3-DSN ID: 0029190	B-IL-EGK-200-R ID: 0029645	200	48	235	54	135 x 110	105 x 80	11	350



foot protection



-1 (bolt hole)



1-DSN (bolt hole+ double brake)

Matching accessories can be found on page 432