

Cable holder



Material: CH size 16, 25, 36 = plastic
 CH size 50 = aluminium
 Small parts galvanised

Working temperature: - 30°C to + 80°C


Application: The cable holders are intended for use with round cables and hoses. One or more different cable holder(s) can be attached under the cable trolley. It must be ensured that the largest holder is attached to the top.

	Cable Ø		material	Order	No.
	mm				
For attachment by screwing from underneath 10-16	10-16	KU	NO 20131-16		
	17-25	KU	NO 20131-25		
	26-36	KU	NO 20131-36		
With retaining bracket	37-50	ALU	NO 20131-50		
	10-16	KU	NO 20133-16		
	17-25	KU	NO 20133-25		
	26-36	KU	NO 20133-36		
	37-50	ALU	NO 20133-50		
	51-63	ALU	NO 20133-63		

Cable trolley




Material: Load bearing part, plastic

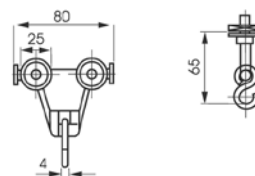

Construction	Order No. 30	Order No. 40
Plain bearing, polyamide	NO 23254	NO 24504
Pl. bearing. with S hook	NO 23900	-

Bracket

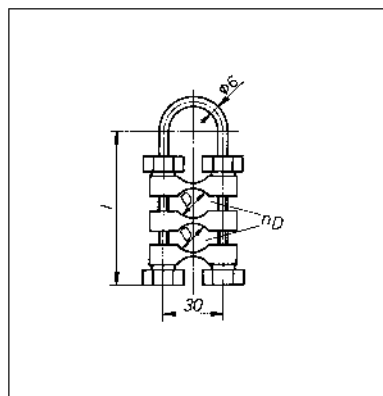

Material: Bracket, galvanised
 Clamping parts, plastic

Number of openings	Total of all single Ø	Order No.
1	max 8-18	NO 20137-1x18
1	max 8-22	NO 20137-1x22
2	max 32	NO 20137-2x32
3	max 30	NO 20137-3x30
3	max 50	NO 20137-3x50
4	max 48	NO 20137-4x72

Other bracket types available on request