



**fitted with**


- work equipment**
- connected load**
- power consumption**
- glare-free**
- system of protection**
- class of protection**
- technology**
- usage**
- luminaire body**
- material**
- surface**
- lamp cover**
- weight (net)**
- mains lead**
- design**
- fastening**
- special features**

- 1 x Light-emitting diode
- light colour neutral white, 5000 K, Color Rendering Index (CRI)=65
- without
- 24 V; DC
- approx. 6 W
- without
- IP 67
- III
- switchable
- without switch
- aluminium
- anodised
- screen, clear
- approx. 0.4 kg
- approx. 3.0 m; with free stranded wires
- integrated version
- screws
- beam angle 30°, integrated version

**illuminance**

measuring conditions: d=50cm

**Em:** 333 lx  
**Emax:** 1224 lx  
**Emin:** 26 lx

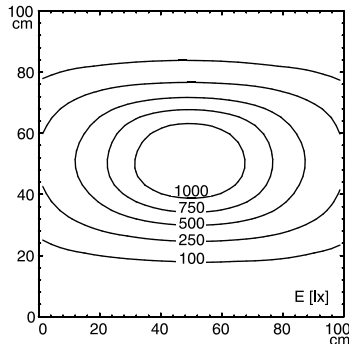

**luminous intensity**

