




Serie 763 4pol (A cod)

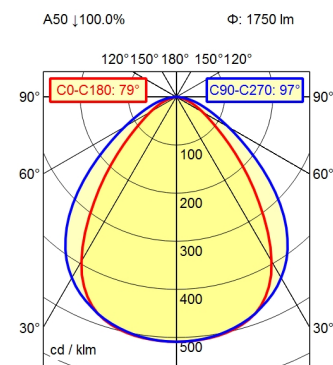

100 x 100 cm Φ: 1750 lm

Em: 579 lx
Emax: 729 lx
Emin: 394 lx

↓ = 100 cm

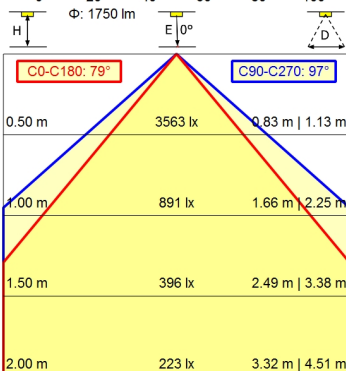

Light source	LED
Work equipment	Without
Connected load	18 - 30 V; DC
Power consumption	ca. 18 W
Luminous flux	approx. 1.750 lm
Luminous efficiency ¹⁾	approx. 97 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 5.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; Symmetric
Beam angle	80°/100°
Chromaticity tolerance LED	< 4 SDCM
Glare control	optical film
Luminance (L65)	≤ 13.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	≤ 25
System of protection/Class	IP 67; III
Technology	Switchable
Operation	External
Housing	Aluminium; Anodised; Aluminium coloured anodised Borosilicate; Clear
Light source cover	
Mains lead	Built-in plug; Serie 763 4pol (A cod) M12
Design	mounted version
Fastening	L-angle; Clamp
Minimum ambient temperature	-10 °C
Maximum ambient temperature	60 °C
EAN	4013330044053
Weight without/incl. packaging	ca. 3,6 kg; 4,2 kg
Dimensions (dimensional drawing)	A=1070 mm
Packaging dimensions	ca. 1.270 mm; 90 mm; 80 mm
Special features	Eco equipment

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g