


M12-A-5

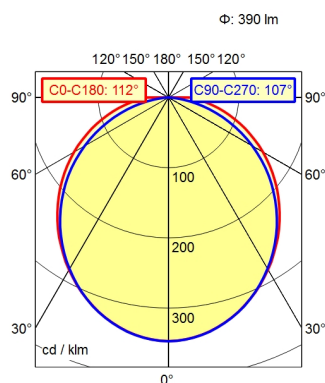

Light source	LED
Work equipment	Without
Connected load	22 - 26 V; DC
Power consumption	ca. 16 W
Luminous flux	approx. 390 lm
Luminous efficiency ¹⁾	approx. 24 lm/W
Light type/-color	adjustable light colors; Red; Green; Blue; Yellow; Magenta; Cyan; White
Light distribution	Direct
Beam angle	112° / 107°
Glare control	Optics
System of protection/Class	IP 54; C III
Technology	Multi-stage switchable
Operation	External
Emergency lighting	none
Housing	Aluminium/plastic; Anodised, painted; Aluminium coloured anodised
Light source cover	Acrylic (PMMA); Satine
Mains lead	Built-in plug; M12-A-5
Design	mounted version
Fastening	Bracket
Minimum ambient temperature	5 °C
Maximum ambient temperature	40 °C
Decorative contrast side parts	Natural silver anodised
EAN	4013330117924
Weight without/incl. packaging	ca. 0,2 kg; 0,4 kg
Dimensions (dimensional drawing)	A=895mm, Cmin=850mm, Cmax=880mm
Packaging dimensions	ca. 1.030; 110; 95
Special features	7 colours controllable

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear