


M12-A-5

Light source	LED
Work equipment	Without
Connected load	22 - 26 V; DC
Power consumption	ca. 21 W
Luminous flux	approx. 1.050 lm
Luminous efficiency ¹⁾	approx. 50 lm/W
Light type/-color	yellow; Yellow
Light distribution	Direct
Beam angle	89° / 97°
Glare control	Optics
System of protection/Class	IP 54; III
Technology	Switchable
Operation	External
Housing	Aluminium/plastic; Anodised, painted; Aluminium coloured anodised Acrylic (PMMA); Satine
Light source cover	
Mains lead	Built-in plug; M12-A-5
Design	mounted version
Fastening	Bracket
Minimum ambient temperature	5 °C
Maximum ambient temperature	40 °C
Decorative contrast side parts	Natural silver anodised
EAN	4013330047160
Weight without/incl. packaging	ca. 0,4 kg; 1 kg
Dimensions (dimensional drawing)	A=1035mm C=1005+/-15mm
Packaging dimensions	ca. 1.282 mm; 110 mm; 98 mm

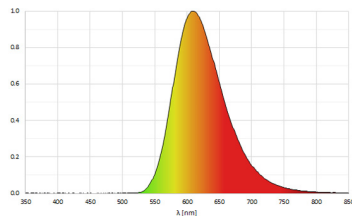

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear