


QUICKON 3

| | |
|--|---------------------------|
| Light source | LED |
| Work equipment | Without |
| Connected load | 16 - 32 V; DC |
| Power consumption | ca. 10 W |
| Luminous flux | approx. 1.150 lm |
| Luminous efficiency ¹⁾ | approx. 115 lm/W |
| Light type/-color | Daylight |
| Colour temperatur | approx. 5.400 K |
| Color rendering index | CRI ≥ 80 |
| Light distribution | Direct; approx. 93 % |
| Beam angle | 120° |
| Chromaticity tolerance LED | < 5 SDCM |
| Glare control | without |
| Luminance (L65) | ≤ 8.000 cd/m ² |
| UGR class (4H 8H; EN 12464-1) | ≤ 25 |
| System of protection/Class | IP 67; III |
| Technology | Switchable |
| Operation | External |
| Housing | Polycarbonate (PC), clear |
| Light source cover | Polycarbonate (PC) |
| Mains lead | Built-in plug; QUICKON 3 |
| Fastening | Lamp bracket (accessory) |
| Light output | D=591 mm |
| Side part | D with plug |
| Minimum ambient temperature | -25 °C |
| Maximum ambient temperature | 40 °C |
| EAN | 4013330083823 |
| Weight without/incl. packaging | ca. 0,7 kg; 1 kg |
| Dimensions (dimensional drawing) | A=652 mm |
| Packaging dimensions | ca. 843 mm; 100 mm; 88 mm |
| Special features | Through-wired |

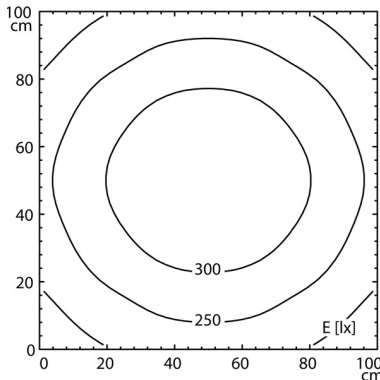

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.