
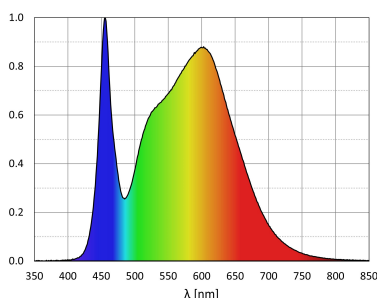
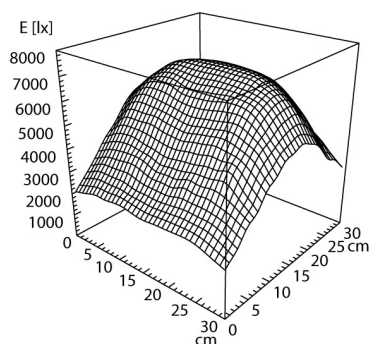


CEE 7/VII

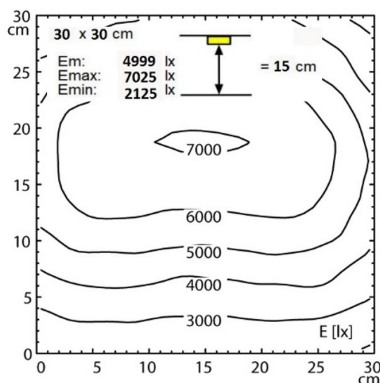

Light source	LED
Work equipment	Electronic transformer
Connected load	100 V; 120 V; 220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 13 W
Luminous flux	approx. 970 lm
Luminous efficiency ¹⁾	approx. 74 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 3 SDCM
Glare control	Diffusor
System of protection/Class	IP 20; I
Technology	Multi-stage switchable
Operation	Switch
Housing	Plastic; Pale grey
Light source cover	Milky; Plastic
Arm	Pale grey
Mains lead	ca. 3 m; Mains plug; CEE 7/VII
Fastening	Tap16; Table clamp (accessory); Wall bracket (accessory); Screw-down flange
Lens, dimensions	175 x 105 mm
Diopter lens	3 DPT
EAN	4013330089399
Weight without/incl. packaging	ca. 4,4 kg; 5,4 kg
Packaging dimensions	ca. 760 mm; 190 mm; 390 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Magnifier luminaire SNLQ
SNLQ 54/2

113460000-00695501

