
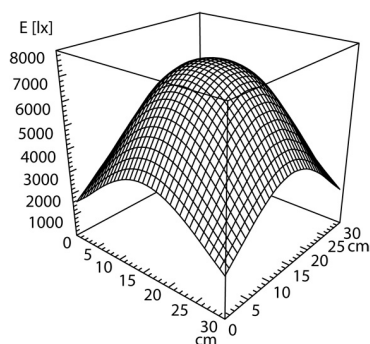


CE

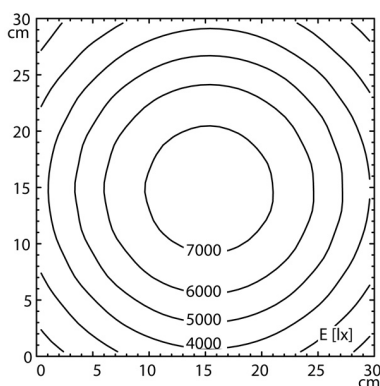

CEE 7/VII

**Light source****Work equipment****Connected load****Secondary tension****Power consumption****Sec. power consumption****Luminous flux****Luminous efficiency ¹⁾****Light type/-color****Colour temperatur****Color rendering index****Light distribution****Chromaticity tolerance LED****Glare control****System of protection/Class****Technology****Operation****Housing****Light source cover****Arm****Balance of articulation joints****Mains lead****Fastening****Lens, dimensions****Lens material****Diopter lens****EAN****Weight without/incl. packaging****Packaging dimensions****Special features**

LED

Electronic transformer

100 - 240 V; AC; 50 Hz; 60 Hz

24 V

ca. 16 W

ca. 14 W

approx. 950 lm

approx. 67 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct; approx. 100 %

< 4 SDCM

Diffusor

IP 20; I with plug-in power supply; III without plug-in power supply

Multi-stage switchable; Continuously dimmable;

Touch DIM

Multi-function switch

Plastic; ESD-version; Black

Polyamide; Milky

Tubular aluminium section; ESD-coat of lacquer;

Black

Spring

ca. 3,5 m; Mains plug; CEE 7/VII

Screw-down flange; Table clamp

Ø 160 mm

Glass

3,5 DPT

4013330014575

ca. 2,6 kg; 4,1 kg

ca. 760 mm; 390 mm; 190 mm

Ra (luminaire) ca. 90; ESD version; Light characteristic can be adjusted with a 3-way switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear