
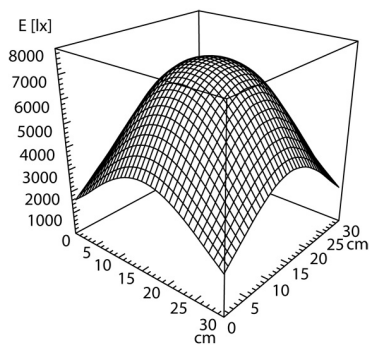


CEE 7/VII

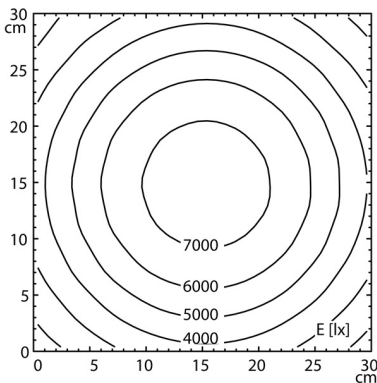

Light source	LED
Work equipment	Electronic transformer
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	ca. 16 W
Sec. power consumption	ca. 14 W
Luminous flux	approx. 950 lm
Luminous efficiency ¹⁾	approx. 67 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct; approx. 100 %
Chromaticity tolerance LED	< 4 SDCM
Glare control	Diffusor
System of protection/Class	IP 20; I with plug-in power supply; III without plug-in power supply
Technology	Multi-stage switchable; Continuously dimmable; Touch DIM
Operation	Multi-function switch
Housing	Plastic; ESD-version; Black
Light source cover	Polyamide; Milky
Arm	Tubular aluminium section; ESD-coat of lacquer; Black
Balance of articulation joints	Spring
Mains lead	ca. 3,3 m; Mains plug; CEE 7/VII
Fastening	Screw-down flange
Lens, dimensions	Ø 160 mm
Lens material	Glass
Diopter lens	3,5 DPT
EAN	4013330014568
Weight without/incl. packaging	ca. 2,5 kg; 3,5 kg
Packaging dimensions	ca. 1.050 mm; 450 mm; 100 mm
Special features	Ra (luminaire) ca. 90; ESD version; Long arms; Light characteristic can be adjusted with a 3-way switch

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear