
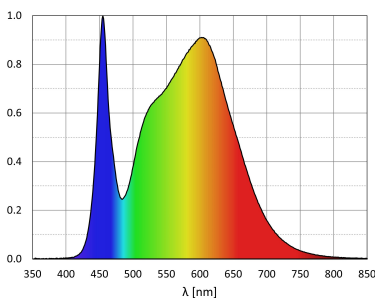
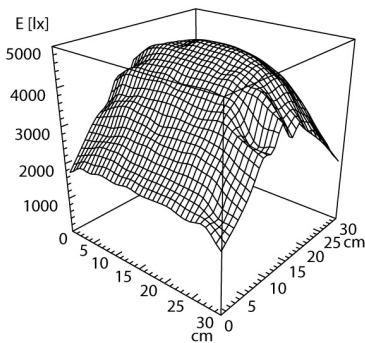


CEE 7/VII

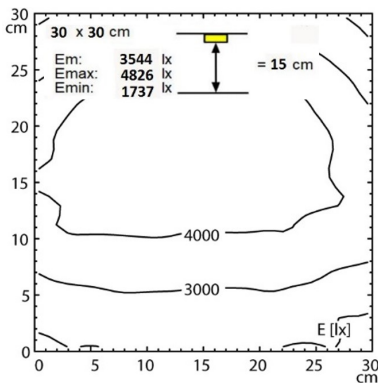

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency ¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Chromaticity tolerance LED

Glare control

System of protection/Class

Technology

Operation

Housing

Light source cover

Arm

Mains lead

Fastening

Lens, dimensions

Diopter lens

EAN

Weight without/incl. packaging

Packaging dimensions

Special features

LED

Electronic transformer

100 V; 120 V; 220 - 240 V; AC; 50 Hz; 60 Hz

ca. 13 W

approx. 680 lm

approx. 52 lm/W

Cold white

approx. 3.900 K

CRI ≥ 80

Direct; approx. 100 %

< 3 SDCM

Diffusor

IP 20; I

Multi-stage switchable

Switch

Plastic; Black

Milky; Plastic

Black

ca. 3 m; Mains plug; CEE 7/VII

Tap16; Table clamp (accessory); Wall bracket (accessory); Screw-down flange

175 x 105 mm

3 DPT

4013330089368

ca. 4,5 kg; 5,5 kg

ca. 760 mm; 190 mm; 390 mm

ESD version

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

Magnifier lumineuse SNLQ SNLQ 54/2 A

113459000-00695507

