


CEE 7/VII



Light source	LED
Work equipment	Electronic transformer
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	ca. 23 W
Sec. power consumption	ca. 19 W
Luminous flux	approx. 1.500 lm
Luminous efficiency ¹⁾	approx. 78 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI \geq 90; R9 \geq 50
Light distribution	Direct; approx. 100 %
Beam angle	75°
Chromaticity tolerance LED	< 3 SDCM
Glare control	optical film; Prism aperture
Luminance (L65)	\leq 12.000 cd/m ²
UGR class (4H 8H; EN 12464-1)	\leq 25
System of protection/Class	IP 20; I with plug-in power supply; III without plug-in power supply
Technology	Continuously dimmable; Touch DIM
Operation	Multi-function switch
Housing	Sectional aluminium; Anodised; Aluminium coloured anodised
Light source cover	Acrylic (PMMA); Structured
Mains lead	ca. 4,7 m; Mains plug; CEE 7/VII
Design	Mounted version
Fastening	Screw-down bracket, horizontal
EAN	4013330133818
Weight without/incl. packaging	ca. 1,4 kg; 2,4 kg
Packaging dimensions	ca. 710 mm; 300 mm; 105 mm
Special features	Fixed connection

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

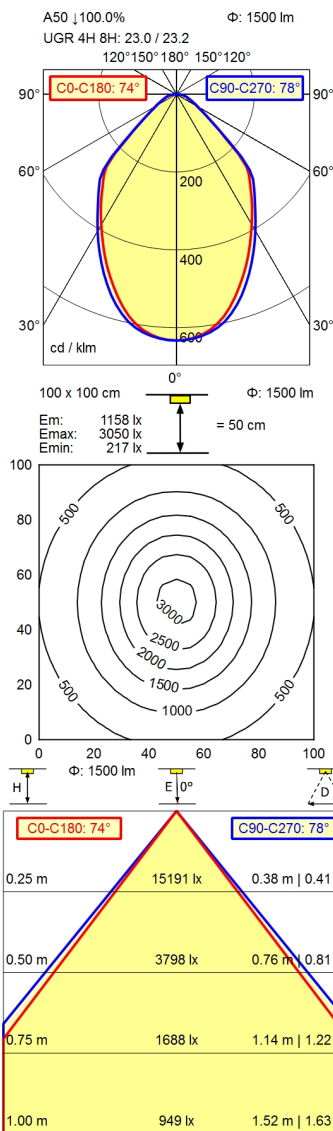