
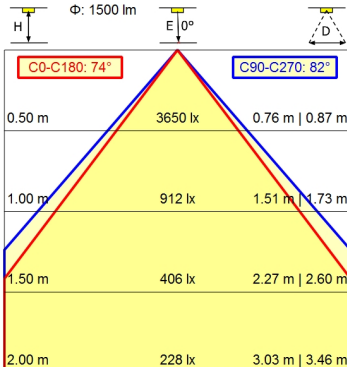
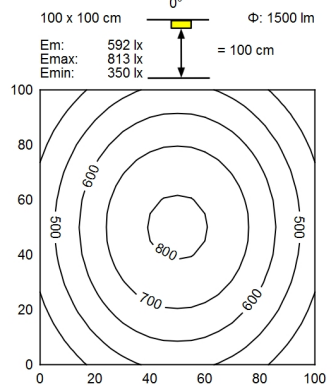


GST 18i3S

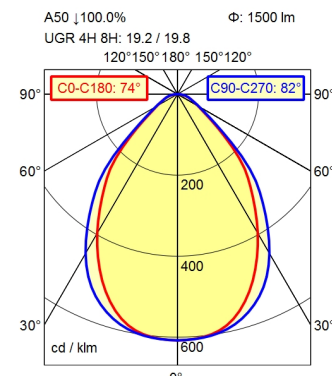

- Light source**
- Work equipment**
- Connected load**
- Power consumption**
- Luminous flux**
- Luminous efficiency <sup>1)</sup>**
- Light type/-color**
- Colour temperatur**
- Color rendering index**
- Light distribution**
- Beam angle**
- Chromaticity tolerance LED**
- Glare control**
- Luminance (L65)**
- UGR class (4H 8H; EN 12464-1)**
- System of protection/Class**
- Technology**
- Operation**
- Housing**
- Light source cover**
- Mains lead**
- Design**
- Fastening**
- Decorative contrast side parts**
- EAN**
- Weight without/incl. packaging**
- Packaging dimensions**
- Special features**

- LED
- Electronic ballast
- 220 - 240 V; AC; 50 Hz; 60 Hz
- ca. 18 W
- approx. 1.500 lm
- approx. 83 lm/W
- Cold white
- approx. 4.000 K
- CRI  $\geq$  90; R9  $\geq$  50
- Direct; Symmetric; approx. 100 %
- 75°
- < 3 SDCM
- Prism aperture
- $\leq$  3.800 cd/m<sup>2</sup>
- $\leq$  22
- IP 20; I
- Switchable
- Rocker switch
- Aluminium/plastic; Anodised; Aluminium coloured anodised
- Structured; Plastic
- ca. 0,3 m; Built-in plug; Connection box; GST 18i3S mounted version
- Screw down lash
- Black
- 4013330037864
- ca. 3,2 kg; 4,5 kg
- ca. 865 mm; 420 mm; 102 mm
- Through-wired

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

# Workplace-system luminaire Tameto SAHQ 44 D

112971000-00555576

