
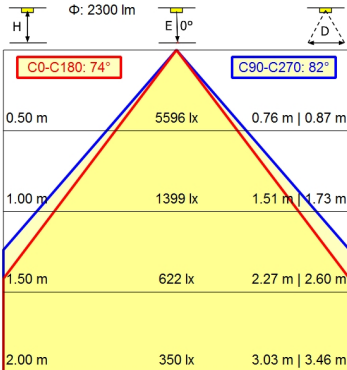
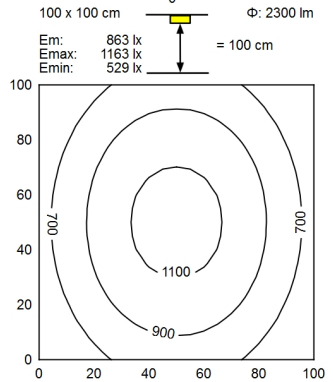


GST 18i3F REV

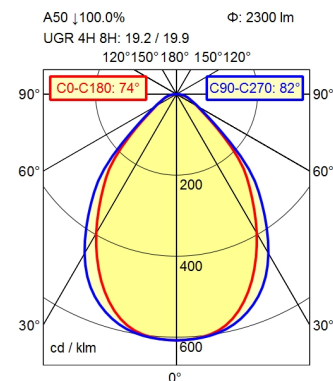

- Light source**
- Work equipment**
- Connected load**
- Power consumption**
- Luminous flux**
- Luminous efficiency <sup>1)</sup>**
- Light type/-color**
- Colour temperatur**
- Color rendering index**
- Light distribution**
- Beam angle**
- Chromaticity tolerance LED**
- Glare control**
- Luminance (L65)**
- UGR class (4H 8H; EN 12464-1)**
- System of protection/Class**
- Technology**
- Operation**
- Housing**
- Light source cover**
- Mains lead**
- Design**
- Fastening**
- Decorative contrast side parts**
- EAN**
- Weight without/incl. packaging**
- Packaging dimensions**
- Special features**

- LED
- Electronic ballast
- 220 - 240 V; AC; 50 Hz; 60 Hz
- ca. 26 W
- approx. 2.300 lm
- approx. 88 lm/W
- Cold white
- approx. 4.000 K
- CRI  $\geq$  90; R9  $\geq$  50
- Direct; Symmetric; approx. 100 %
- 75%
- < 3 SDCM
- Prism aperture
- $\leq$  3.800 cd/m<sup>2</sup>
- $\leq$  22
- IP 20; I
- Continuously dimmable; DALI; Touch DIM
- Rocker switch
- Aluminium/plastic; Anodised; Aluminium coloured anodised
- Structured; Plastic
- Built-in plug; Connection box; GST 18i3F REV
- mounted version
- Screw down lash
- Black
- 4013330043803
- ca. 4,6 kg; 5,6 kg
- ca. 1.300 mm; 220 mm; 120 mm
- Through-wired

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.

# Workplace-system luminaire Tameto SAHQ 66 RD

113037000-00577620

