
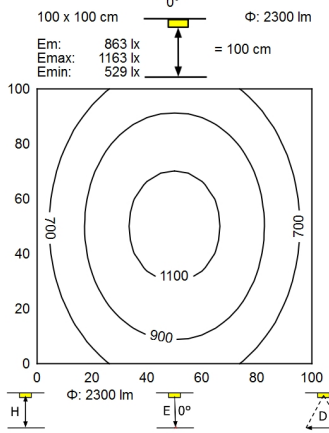


2 pin

1 pin

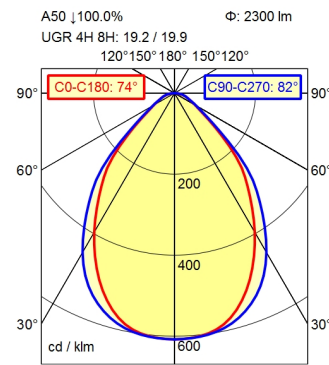

Height (m)	Beam angle (°)	Beam diameter (m)	Illuminance (lx)
0.50 m	74° / 82°	0.76 m 0.87 m	5596 lx
1.00 m	74° / 82°	1.51 m 1.73 m	1399 lx
1.50 m	74° / 82°	2.27 m 2.60 m	622 lx
2.00 m	74° / 82°	3.03 m 3.46 m	350 lx

Light source

Work equipment

Connected load

Power consumption

Luminous flux

Luminous efficiency¹⁾

Light type/-color

Colour temperatur

Color rendering index

Light distribution

Beam angle

Chromaticity tolerance LED

Glare control

Luminance (L65)

UGR class (4H 8H; EN 12464-1)

System of protection/Class

Technology

Operation

Housing

Light source cover

Mains lead

Fastening

Decorative contrast side parts

EAN

Weight without/incl. packaging

Packaging dimensions

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 26 W

approx. 2.300 lm

approx. 88 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct; approx. 100 %

75°

< 3 SDCM

Prism aperture

≤ 3.800 cd/m²

≤ 22

IP 20; I

Switchable

Rocker switch

Aluminium/plastic; Anodised; Aluminium coloured

anodised

Without

ca. 0,08 m; Connector; 2 pin; 1 pin

extension range of rise-and-fall pendant 0.3 - 1.3 m

Black

4013330038977

ca. 4,3 kg; 7,9 kg

ca. 1.385 mm; 300 mm; 137 mm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Workplace-system luminaire Tameto SAHZQ 66

112983000-00551373

