
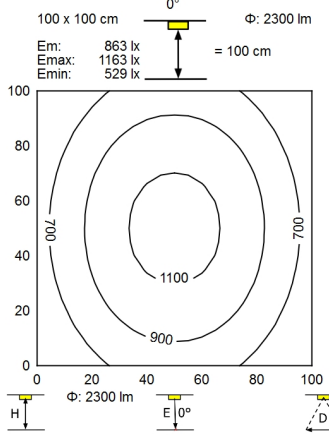


2 pin

1 pin

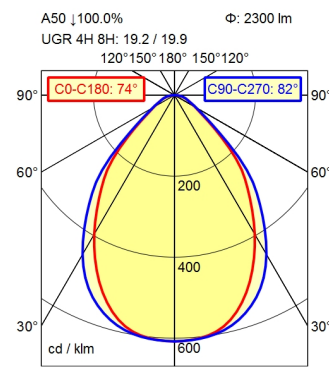

Height (m)	Beam diameter (m)	Illuminance (lx)
0.50 m	0.76 m   0.87 m	5596 lx
1.00 m	1.51 m   1.73 m	1399 lx
1.50 m	2.27 m   2.60 m	622 lx
2.00 m	3.03 m   3.46 m	350 lx

**Light source**

**Work equipment**

**Connected load**

**Power consumption**

**Luminous flux**

**Luminous efficiency**<sup>1)</sup>

**Light type/-color**

**Colour temperatur**

**Color rendering index**

**Light distribution**

**Beam angle**

**Chromaticity tolerance LED**

**Glare control**

**Luminance (L65)**

**UGR class (4H 8H; EN 12464-1)**

**System of protection/Class**

**Technology**

**Operation**

**Housing**

**Light source cover**

**Mains lead**

**Fastening**

**Decorative contrast side parts**

**EAN**

**Weight without/incl. packaging**

**Packaging dimensions**

LED

Electronic ballast

220 - 240 V; AC; 50 Hz; 60 Hz

ca. 26 W

approx. 2.300 lm

approx. 88 lm/W

Cold white

approx. 4.000 K

CRI ≥ 90; R9 ≥ 50

Direct; approx. 100 %

75°

< 3 SDCM

Prism aperture

≤ 3.800 cd/m<sup>2</sup>

≤ 22

IP 20; I

Continuously dimmable; DALI; Touch DIM

Rocker switch

Aluminium/plastic; Anodised; Aluminium coloured

anodised  
Structured; Plastic

ca. 0,08 m; Connector; 2 pin; 1 pin

extension range of rise-and-fall pendant 0.3 - 1.3 m

Black

4013330038984

ca. 4,3 kg; 8 kg

ca. 1.385 mm; 300 mm; 137 mm

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

# Workplace-system luminaire Tameto SAHZQ 66 R

112984000-00551377

