Workplace-system luminaire Tameto SAHZQ 88

112987000-00551386

Waldmann
ENGINEERS OF LIGHT

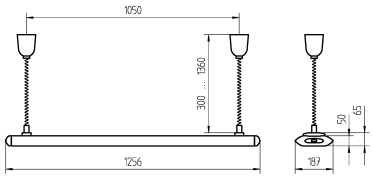

20 YEARS warranty

CE

2 pin

1 pin

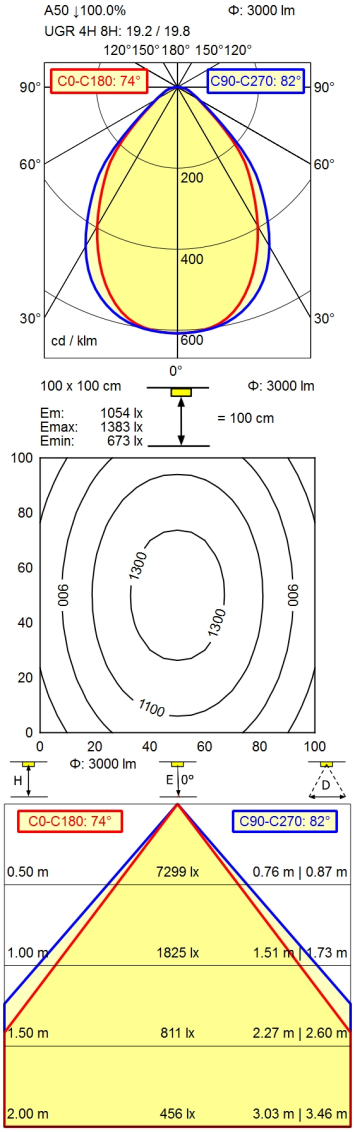

Light source	LED
Work equipment	Electronic ballast
Connected load	220 - 240 V; AC; 50 Hz; 60 Hz
Power consumption	ca. 33 W
Luminous flux	approx. 3.000 lm
Luminous efficiency [1]	approx. 90 lm/W
Light type/-color	Cold white
Colour temperatur	approx. 4.000 K
Color rendering index	CRI ≥ 90; R9 ≥ 50
Light distribution	Direct; approx. 100 %
Beam angle	75°
Chromaticity tolerance LED	< 3 SDCM
Glare control	Prism aperture
Luminance (L65)	≤ 3.800 cd/m²
UGR class (4H 8H; EN 12464-1)	≤ 22
System of protection/Class	IP 20; I
Technology	Switchable
Operation	Rocker switch
Housing	Aluminium/plastic; Anodised; Aluminium coloured anodised
Light source cover	Structured; Plastic
Mains lead	ca. 0,08 m; Connector; 2 pin; 1 pin
Fastening	extension range of rise-and-fall pendant 0.3 - 1.3 m
Decorative contrast side parts	Black
EAN	4013330039035
Weight without/incl. packaging	ca. 5,8 kg; 7,9 kg
Packaging dimensions	ca. 1.385 mm; 300 mm; 137 mm

[1] For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control g

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 13/04/2025 H.Waldmann GmbH & Co. KG

Workplace-system luminaire Tameto SAHZQ 88

112987000-00551386

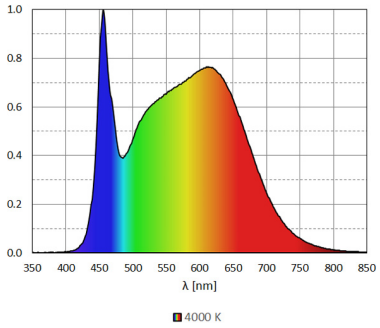

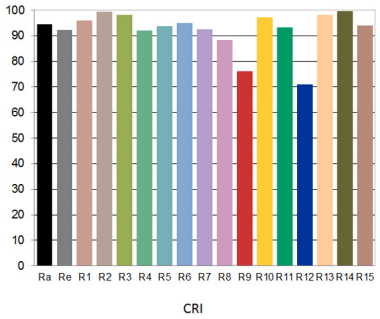

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.

www.waldmann.com
© 13/04/2025 H.Waldmann GmbH & Co. KG