


polyamide electrically conductive // medium-weight housing IM // up to 500 kg



Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)

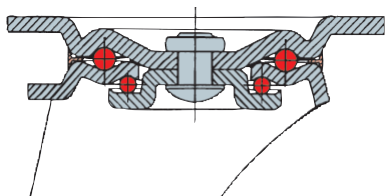

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IM-PAM-080-K-3-EC ID: 0033425	L-IM-PAM-080-K-3-DSN-EC ID: 0033431	B-IM-PAM-080-K-EC ID: 0033437	80	35	108	40	105 x 80	80 x 60	8.5	200
L-IM-PAM-100-K-3-EC ID: 0033426	L-IM-PAM-100-K-3-DSN-EC ID: 0033432	B-IM-PAM-100-K-EC ID: 0033438	100	35	128	40	105 x 80	80 x 60	8.5	300
L-IM-PAM-125-K-3-EC ID: 0033427	L-IM-PAM-125-K-3-DSN-EC ID: 0033434	B-IM-PAM-125-K-EC ID: 0033439	125	40	155	40	105 x 80	80 x 60	8.5	400
L-IM-PAM-150-K-3-EC ID: 0033428	L-IM-PAM-150-K-3-DSN-EC ID: 0033435	B-IM-PAM-150-K-EC ID: 0033440	150	45	195	56	135 x 110	105 x 80	10.5	500
L-IM-PAM-200-K-3-EC ID: 0033429	L-IM-PAM-200-K-3-DSN-EC ID: 0033436	B-IM-PAM-200-K-EC ID: 0033441	200	50	245	56	135 x 110	105 x 80	10.5	500

Matching accessories can be found on page 432