



elastic rubber, electrically conductive // medium-weight housing IM // up to 400 kg

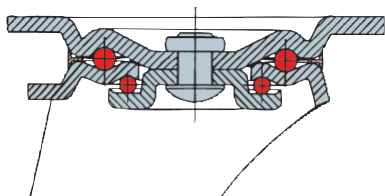

Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)



swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IM-EGA-080-K-3-EC ID: 0033750	L-IM-EGA-080-K-3-DSN-EC ID: 0033758	B-IM-EGA-080-K-EC ID: 0033764	80	35	108	40	105 x 80	80 x 60	9	120
L-IM-EGA-100-K-3-EC ID: 0033751	L-IM-EGA-100-K-3-DSN-EC ID: 0033759	B-IM-EGA-100-K-EC ID: 0033765	100	40	128	40	105 x 80	80 x 60	9	180
L-IM-EGA-125-K-3-EC ID: 0033753	L-IM-EGA-125-K-3-DSN-EC ID: 0033760	B-IM-EGA-125-K-EC ID: 0033766	125	40	155	40	105 x 80	80 x 60	9	200
L-IM-EGA-160-K-3-EC ID: 0033754	L-IM-EGA-160-K-3-DSN-EC ID: 0033762	B-IM-EGA-160-K-EC ID: 0033767	160	50	200	56	135 x 110	105 x 80	11	300
L-IM-EGA-200-K-3-EC ID: 0033757	L-IM-EGA-200-K-3-DSN-EC ID: 0033763	B-IM-EGA-200-K-EC ID: 0033768	200	50	245	56	135 x 110	105 x 80	11	400

Matching accessories can be found on page 432