


polyurethane electrically conductive // medium-weight housing IM // up to 500 kg



Features:

- castor series IM:
- heavy steel plate housing, galvanized
- fork head with double ball bearing
- (old designation: LU)

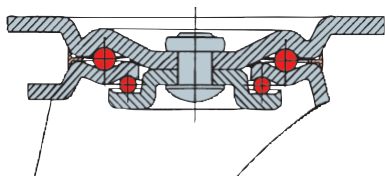

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IM-PUZK-080-K-3-EC ID: 0033396	L-IM-PUZK-080-K-3-DSN-EC ID: 0033405	B-IM-PUZK-080-K-EC ID: 0033411	80	35	108	40	105 x 80	80 x 60	8.5	150
L-IM-PUZK-100-K-3-EC ID: 0033397	L-IM-PUZK-100-K-3-DSN-EC ID: 0033406	B-IM-PUZK-100-K-EC ID: 0033412	100	35	128	40	105 x 80	80 x 60	8.5	200
L-IM-PUZK-125-K-3-EC ID: 0033400	L-IM-PUZK-125-K-3-DSN-EC ID: 0033407	B-IM-PUZK-125-K-EC ID: 0033413	125	40	155	40	105 x 80	80 x 60	8.5	250
L-IM-PUZK-160-K-3-EC ID: 0033402	L-IM-PUZK-160-K-3-DSN-EC ID: 0033408	B-IM-PUZK-160-K-EC ID: 0033414	160	50	200	56	135 x 110	105 x 80	10.5	380
L-IM-PUZK-200-K-3-EC ID: 0033403	L-IM-PUZK-200-K-3-DSN-EC ID: 0033409	B-IM-PUZK-200-K-EC ID: 0033415	200	47	245	56	135 x 110	105 x 80	10.5	500

Matching accessories can be found on page 432