


thermoplastic // standard housing IS, IL // up to 220 kg



Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LI)

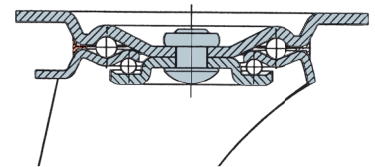

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IL-TPBK-080-K-3 ID: 0029490	L-IL-TPBK-080-K-3-DSN ID: 0029495	B-IL-TPBK-080-K ID: 0029500	80	30	100	36	105 x 80	80 x 60	9	80
L-IL-TPBK-100-K-3 ID: 0029491	L-IL-TPBK-100-K-3-DSN ID: 0029496	B-IL-TPBK-100-K ID: 0029501	100	30	125	36	105 x 80	80 x 60	9	90
L-IL-TPBK-125-K-3 ID: 0029492	L-IL-TPBK-125-K-3-DSN ID: 0029497	B-IL-TPBK-125-K ID: 0029502	125	35	155	36	105 x 80	80 x 60	9	110
L-IL-TPBK-160-K-3 ID: 0029493	L-IL-TPBK-160-K-3-DSN ID: 0029498	B-IL-TPBK-160-K ID: 0029503	160	40	190	52	135 x 110	105 x 80	11	180
L-IL-TPBK-200-K-3 ID: 0029494	L-IL-TPBK-200-K-3-DSN ID: 0029499	B-IL-TPBK-200-K ID: 0029504	200	47	235	54	135 x 110	105 x 80	11	220

Matching accessories can be found on page 432