


<b>Light source</b>	LED
<b>Work equipment</b>	Without
<b>Connected load</b>	16 - 32 V; DC
<b>Power consumption</b>	ca. 10 W
<b>Luminous flux</b>	approx. 950 lm
<b>Luminous efficiency <sup>1)</sup></b>	approx. 95 lm/W
<b>Light type/-color</b>	Daylight
<b>Colour temperatur</b>	approx. 5.400 K
<b>Color rendering index</b>	CRI ≥ 80
<b>Light distribution</b>	Direct; approx. 82 %
<b>Beam angle</b>	>120°
<b>Chromaticity tolerance LED</b>	< 5 SDCM
<b>Glare control</b>	without
<b>Luminance (L65)</b>	≤ 8.000 cd/m <sup>2</sup>
<b>UGR class (4H 8H; EN 12464-1)</b>	≤ 25
<b>System of protection/Class</b>	IP 67; III
<b>Technology</b>	Switchable
<b>Operation</b>	External
<b>Housing</b>	Polycarbonate (PC), opal white
<b>Light source cover</b>	Polycarbonate (PC)
<b>Mains lead</b>	Built-in plug; QUICKON 3
<b>Fastening</b>	Lamp bracket (accessory)
<b>Light output</b>	D=591 mm
<b>Side part</b>	D with plug
<b>Minimum ambient temperature</b>	-25 °C
<b>Maximum ambient temperature</b>	40 °C
<b>EAN</b>	4013330083786
<b>Weight without/incl. packaging</b>	ca. 0,6 kg; 1 kg
<b>Dimensions (dimensional drawing)</b>	A=652 mm
<b>Packaging dimensions</b>	ca. 843 mm; 100 mm; 88 mm
<b>Special features</b>	Through-wired

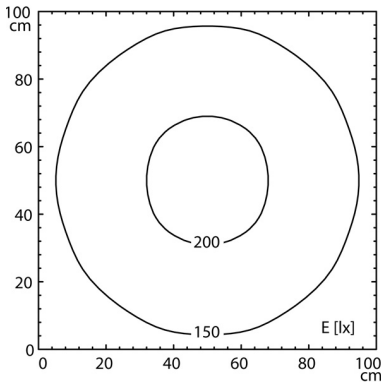

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear.