


polyamide // standard housing IS, IL // up to 450 kg



Features:

- castor series IS, IL:
- steel sheet housing, galvanized
- fork head with double ball bearing
- seal with integrated ball spacer
- (old designation: LCW)

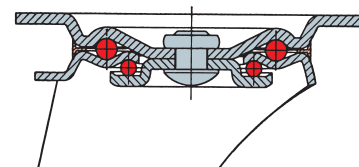

swivel castors	swivel castors with double brake	fixed castors	wheel ø mm	wheel width mm	height mm	projection, swivel castor mm	plate size mm	hole spacing mm	hole ø mm	load-carrying capacity kg
L-IS-PALZ-058-R-3 ID: 0012175		B-IS-PALZ-058-R ID: 0012134	58	29	76	21	80 x 60	60 x 40	7	75
L-IS-PALZ-065-R-3-black ID: 0012178		B-IS-PALZ-065-R-black ID: 0012136	65	32	87	20	95 x 70	75 x 45	7	100
L-IL-PALB-080-R-3 ID: 0033839	L-IL-PALB-080-R-3-DSN ID: 0033845	B-IL-PALB-080-R ID: 0033850	80	33	100	36	105 x 80	80 x 60	9	150
L-IL-PALB-100-R-3 ID: 0033841	L-IL-PALB-100-R-3-DSN ID: 0033846	B-IL-PALB-100-R ID: 0033851	100	35	125	36	105 x 80	80 x 60	9	200
L-IK-PALZ-100-R-3-GP ID: 0031009	L-IL-PALZ-100-R-3-DSN ID: 0038110	B-IL-PALZ-100-3 ID: 0038111	100	38	128	45	135 x 110	105 x 80	11	200
L-IL-PALB-125-R-3 ID: 0033842	L-IL-PALB-125-R-3-DSN ID: 0033847	B-IL-PALB-125-R ID: 0033852	125	36	155	36	105 x 80	80 x 60	9	200
L-IK-PALZ-125-R-3-GP ID: 0012236	L-IL-PALZ-125-R-3-DSV ID: 0031305	B-IL-PALZ-125-R ID: 0012157	125	38	155	48	135 x 110	105 x 80	11	300
L-IL-PALB-150-R-3 ID: 0033843	L-IL-PALB-150-R-3-DSN ID: 0033848	B-IL-PALB-150-R ID: 0033853	150	40	185	52	135 x 110	105 x 80	11	300
L-IS-PALZ-175-R-3 ID: 0029552	L-IS-PALZ-175-R-3-DSN ID: 0029559	B-IS-PALZ-175-R ID: 0029566	175	45	208	52	135 x 105	105 x 80	11	350
L-IL-PALB-200-R-3 ID: 0033844	L-IL-PALB-200-R-3-DSN ID: 0033849	B-IL-PALB-200-R ID: 0033854	200	48	235	54	135 x 110	105 x 80	11	350
L-IK-PALZ-250-R-3 ID: 0012456	L-IK-PALZ-250-R-3-DSN ID: 0012457	B-IK-PALZ-250-R ID: 0012172	250	58	290	66	135 x 110	105 x 80	11	400
L-IP-PALZ-250-R-3-GP ID: 0029554	L-IP-PALZ-250-R-3-DSV-GP ID: 0029561	B-IP-PALZ-250-R-GP ID: 0029568	250	58	290	70	175 x 175	140 x 140	15	450

Matching accessories can be found on page 432